

**Datasheet for #sbcw23918 DN**

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

**WARNING:** Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

**WARNING:** Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw23918 DN (please note that AlN submount numbering is A0U5Y)

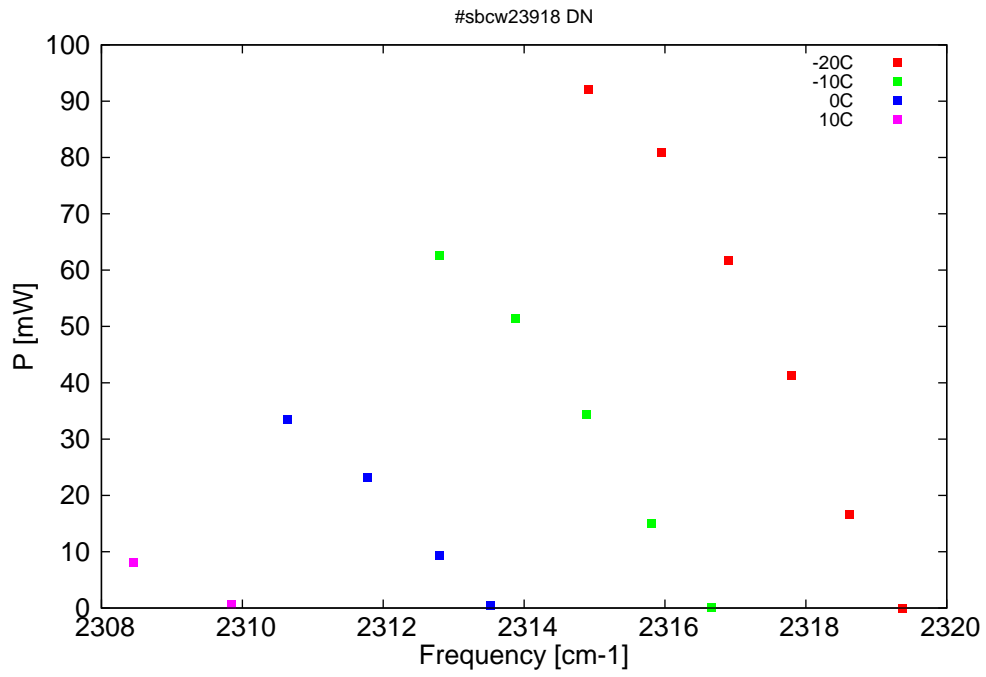


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

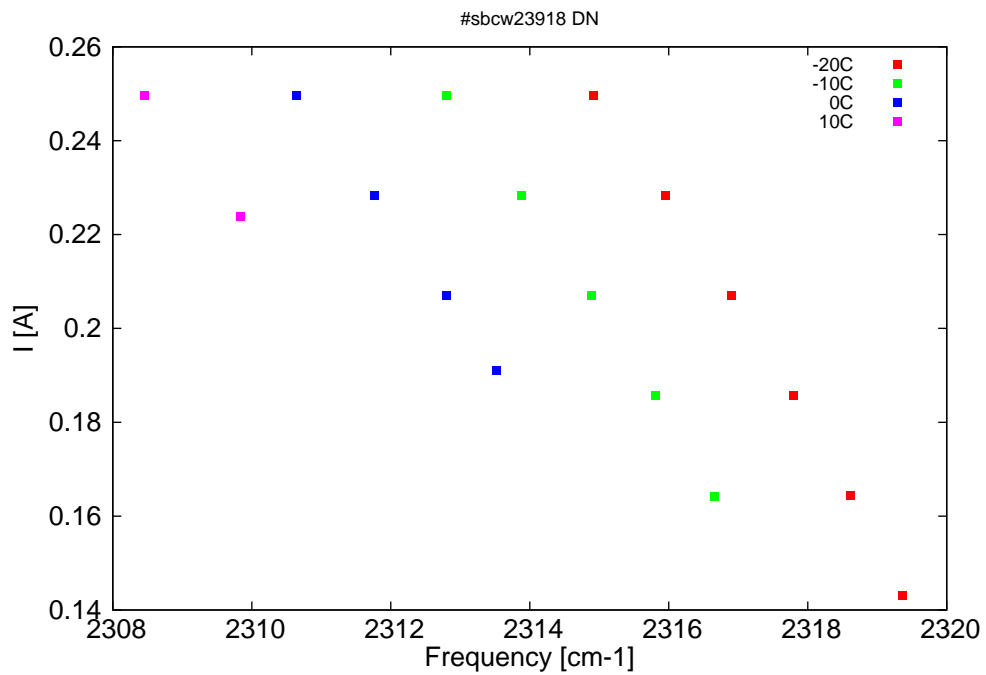


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

$\lambda$ [nm]	$\nu$ [cm <sup>-1</sup> ]	P[mW]	Temp[°C]	$U_{LASER}$ [V]	I[A]
4311.5	2319.4	0	-20	12.4	0.143
4312.9	2318.6	16.5	-20	12.59	0.164
4314.4	2317.8	41.2	-20	12.81	0.186
4316.1	2316.9	61.6	-20	13.03	0.207
4317.9	2315.9	80.9	-20	13.24	0.228
4319.8	2314.9	92	-20	13.45	0.25
4316.6	2316.7	0.2	-10	12.51	0.164
4318.2	2315.8	15.1	-10	12.71	0.186
4319.9	2314.9	34.4	-10	12.93	0.207
4321.7	2313.9	51.3	-10	13.14	0.228
4323.8	2312.8	62.6	-10	13.36	0.25
4322.4	2313.5	0.5	0	12.7	0.191
4323.8	2312.8	9.4	0	12.84	0.207
4325.7	2311.8	23.2	0	13.06	0.228
4327.8	2310.6	33.6	0	13.27	0.25
4329.3	2309.8	0.6	10	12.96	0.224
4331.9	2308.5	8.1	10	13.21	0.25

Table 1: Singlemode optical output power as function of operating parameters.

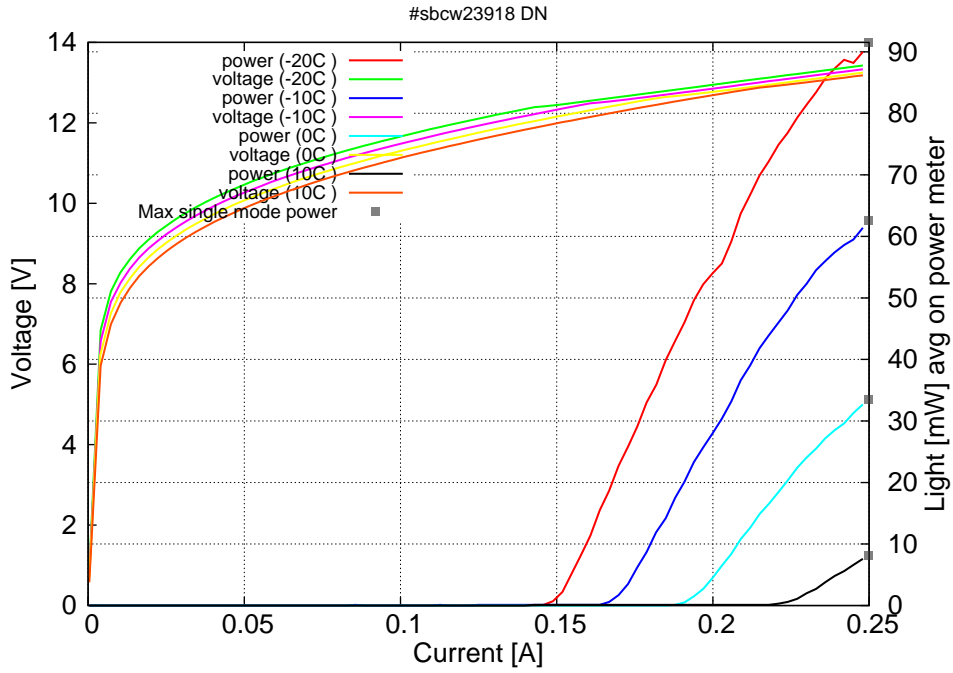


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C:  $I_{th}=0.15A$  /  $V_{th}=12.4V$  (2-wires measurements). Maximum operation current: 0.250A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

