

Datasheet for #sbcw11127 DN
Recommendations:

Please read the User Manual and have a look at the FAQ at
<http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw11127 DN

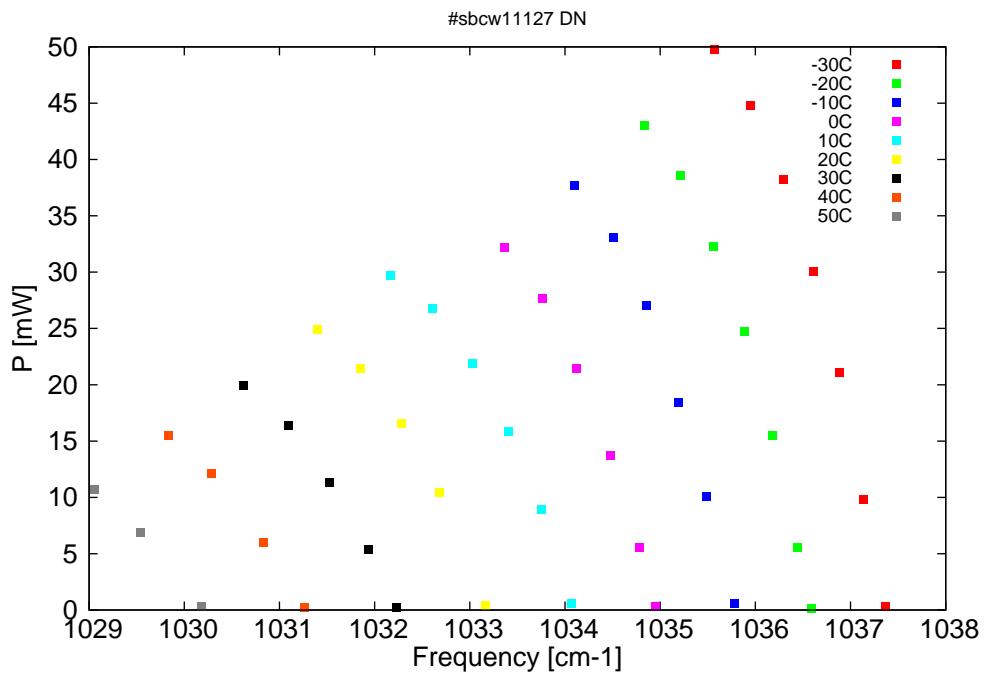


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

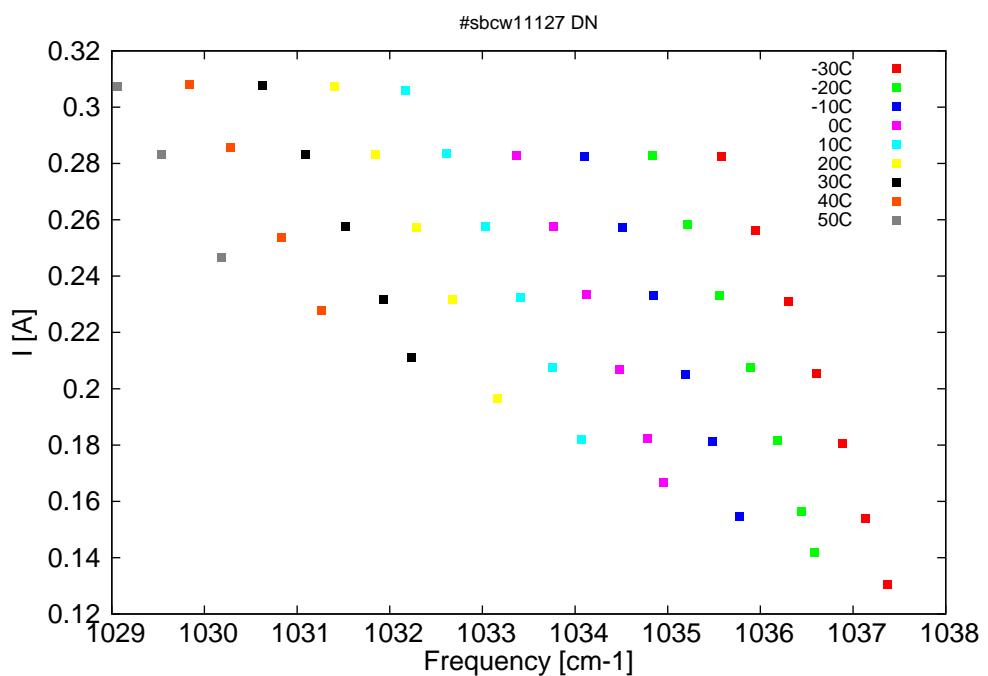


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm $^{-1}$]	P[mW]	Temp[°C]	U $_{LASER}$ [V]	I[A]
9639.8	1037.4	0.3	-30	8.8	0.13
9641.9	1037.1	9.8	-30	9.2	0.15
9644.3	1036.9	21.1	-30	9.5	0.18
9646.9	1036.6	30.1	-30	9.9	0.21
9649.7	1036.3	38.2	-30	10.2	0.23
9653	1035.9	44.8	-30	10.6	0.26
9656.5	1035.6	49.7	-30	11	0.28
9647	1036.6	0.2	-20	8.9	0.14
9648.4	1036.4	5.6	-20	9.1	0.16
9650.8	1036.2	15.5	-20	9.5	0.18
9653.6	1035.9	24.7	-20	9.8	0.21
9656.6	1035.6	32.2	-20	10.2	0.23
9659.8	1035.2	38.6	-20	10.5	0.26
9663.3	1034.8	43	-20	10.9	0.28
9654.6	1035.8	0.6	-10	9	0.15
9657.3	1035.5	10.1	-10	9.4	0.18
9660.1	1035.2	18.5	-10	9.7	0.21
9663.2	1034.9	27	-10	10.1	0.23
9666.4	1034.5	33.1	-10	10.4	0.26
9670.2	1034.1	37.7	-10	10.8	0.28
9662.3	1035	0.3	0	9.1	0.17
9663.9	1034.8	5.5	0	9.3	0.18
9666.7	1034.5	13.7	0	9.7	0.21
9670	1034.1	21.5	0	10	0.23
9673.3	1033.8	27.7	0	10.4	0.26
9677.1	1033.4	32.2	0	10.7	0.28
9670.6	1034.1	0.6	10	9.3	0.18
9673.5	1033.8	9	10	9.6	0.21
9676.7	1033.4	15.8	10	9.9	0.23
9680.2	1033	21.9	10	10.3	0.26
9684.2	1032.6	26.7	10	10.6	0.28
9688.3	1032.2	29.7	10	11	0.31
9679	1033.2	0.4	20	9.4	0.2
9683.5	1032.7	10.4	20	9.9	0.23
9687.2	1032.3	16.6	20	10.2	0.26
9691.4	1031.8	21.5	20	10.6	0.28
9695.5	1031.4	24.9	20	10.9	0.31
9687.8	1032.2	0.3	30	9.5	0.21
9690.5	1031.9	5.4	30	9.8	0.23
9694.4	1031.5	11.3	30	10.1	0.26
9698.5	1031.1	16.4	30	10.5	0.28
9702.9	1030.6	20	30	10.9	0.31
9696.9	1031.3	0.2	40	9.7	0.23
9700.9	1030.8	6	40	10	0.25
9706	1030.3	12.2	40	10.5	0.29
9710.3	1029.8	15.5	40	10.8	0.31
9707.1	1030.2	0.3	50	9.9	0.25
9713.1	1029.5	6.9	50	10.4	0.28
9717.6	1029.1	10.7	50	10.7	0.31

continued on next page

λ [nm]	ν [cm $^{-1}$]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
----------------	---------------------	-------	----------	-----------------	------

Table 1: Singlemode optical output power as function of operating parameters.

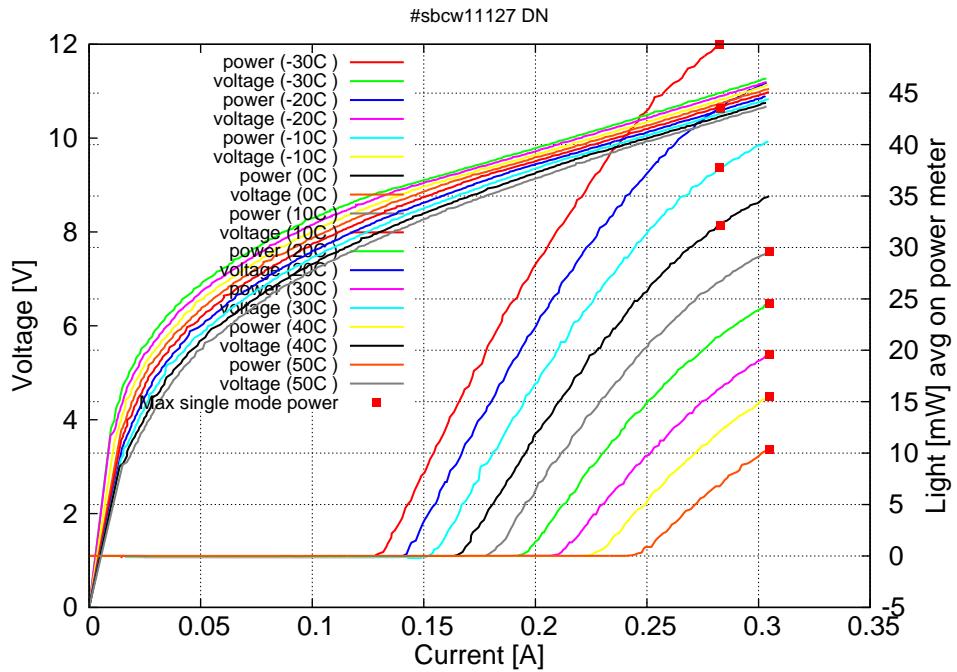


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -30C: $I_{th}=0.13A$ / $V_{th}=8.8V$ (2-wires measurements). Maximum operation current: 0.28A between -30C and 0C, 0.305A between 10C and 50C.

Figure 3: spectra at different temperatures for various DC currents

