

Datasheet for #sbcw15917 DN
Recommendations:

Please read the User Manual and have a look at the FAQ at
<http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw15917 DN

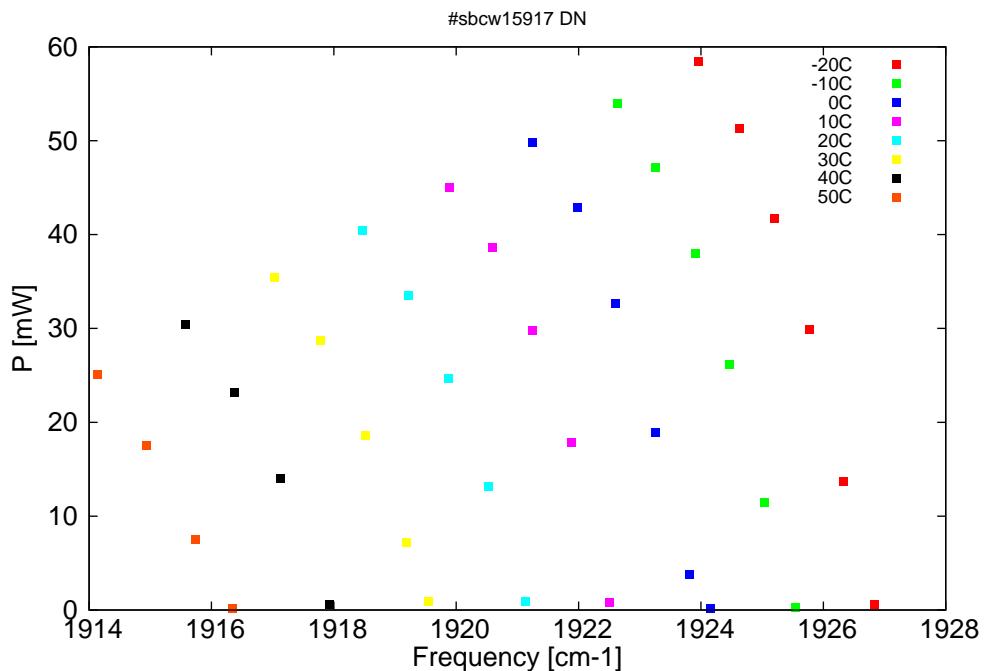


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

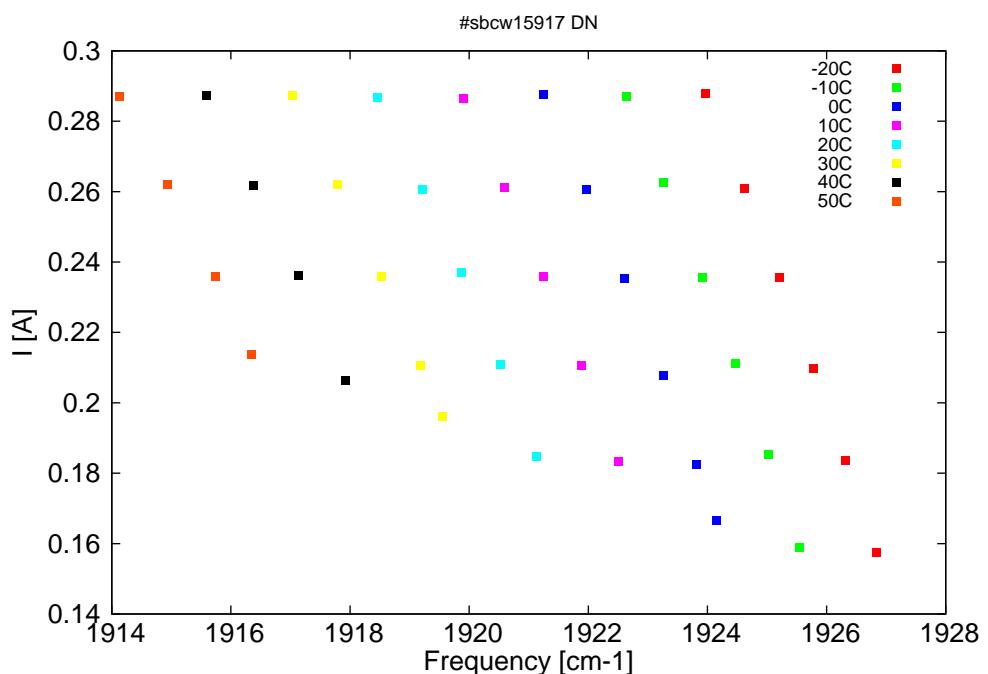


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm $^{-1}$]	P[mW]	Temp[°C]	U $_{LASER}$ [V]	I[A]
5189.8	1926.8	0.6	-20	9.8	0.16
5191.2	1926.3	13.7	-20	9.9	0.18
5192.7	1925.8	29.9	-20	10.1	0.21
5194.2	1925.2	41.7	-20	10.3	0.24
5195.8	1924.6	51.3	-20	10.4	0.26
5197.6	1924	58.5	-20	10.7	0.29
5193.3	1925.6	0.2	-10	9.8	0.16
5194.7	1925	11.5	-10	9.9	0.19
5196.2	1924.5	26.2	-10	10.1	0.21
5197.7	1923.9	38	-10	10.2	0.24
5199.5	1923.3	47.1	-10	10.4	0.26
5201.2	1922.6	53.9	-10	10.6	0.29
5197.1	1924.2	0.1	0	9.8	0.17
5198	1923.8	3.7	0	9.9	0.18
5199.5	1923.3	18.9	0	10	0.21
5201.3	1922.6	32.7	0	10.2	0.24
5203	1922	42.9	0	10.4	0.26
5204.9	1921.3	49.8	0	10.6	0.29
5201.5	1922.5	0.8	10	9.8	0.18
5203.2	1921.9	17.8	10	10	0.21
5204.9	1921.3	29.8	10	10.2	0.24
5206.7	1920.6	38.6	10	10.3	0.26
5208.6	1919.9	45.1	10	10.6	0.29
5205.3	1921.1	0.9	20	9.8	0.18
5206.9	1920.5	13.1	20	10	0.21
5208.7	1919.9	24.7	20	10.1	0.24
5210.5	1919.2	33.5	20	10.3	0.26
5212.5	1918.5	40.5	20	10.5	0.29
5209.5	1919.6	0.9	30	9.9	0.2
5210.5	1919.2	7.2	30	10	0.21
5212.3	1918.5	18.6	30	10.1	0.24
5214.3	1917.8	28.8	30	10.3	0.26
5216.4	1917	35.5	30	10.5	0.29
5214	1917.9	0.6	40	9.9	0.21
5216.1	1917.1	14	40	10.1	0.24
5218.2	1916.4	23.1	40	10.3	0.26
5220.3	1915.6	30.4	40	10.5	0.29
5218.3	1916.3	0.2	50	10	0.21
5219.9	1915.7	7.5	50	10.1	0.24
5222.1	1914.9	17.6	50	10.3	0.26
5224.3	1914.1	25.1	50	10.5	0.29

Table 1: Singlemode optical output power as function of operating parameters.

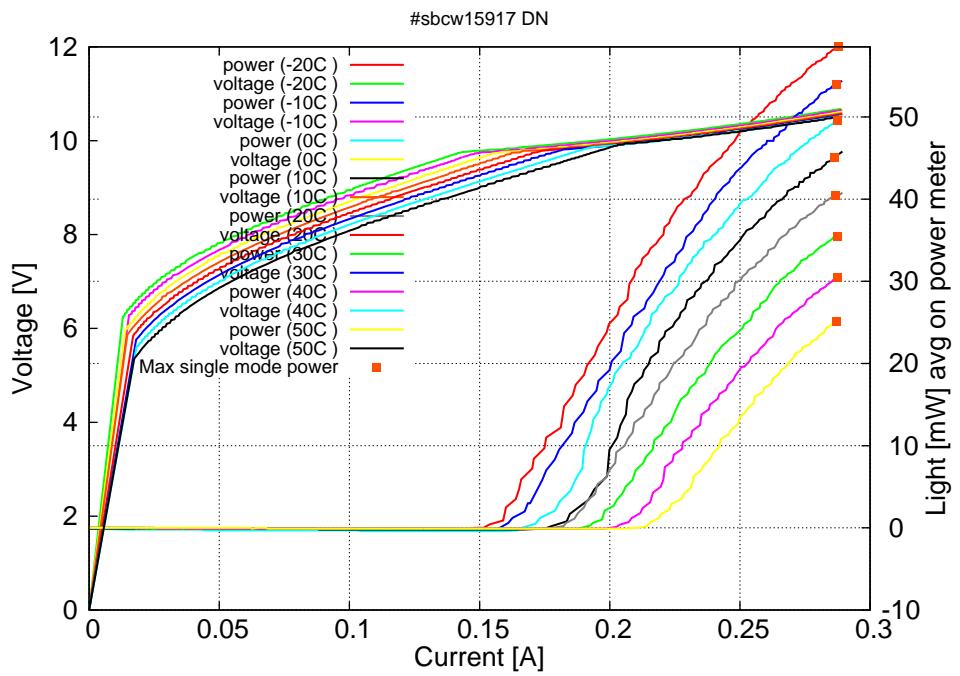


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.15A$ / $V_{th}=9.8V$ (2-wires measurements). Maximum operation current: 0.29A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

