

Datasheet for #sbcw18579 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.

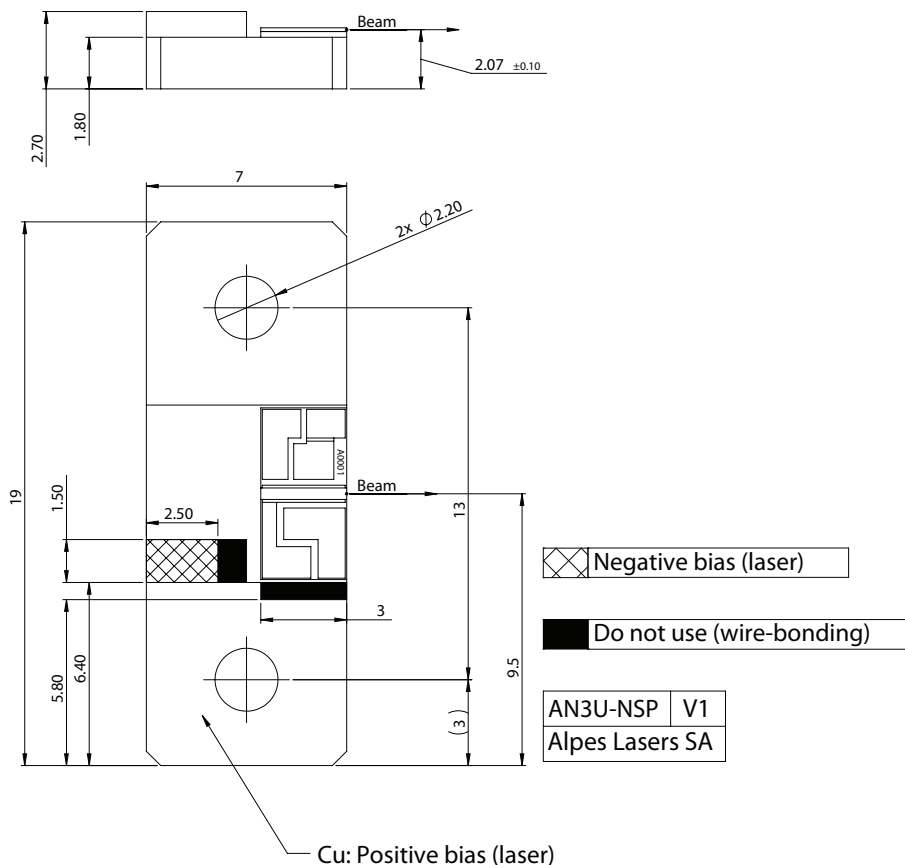


Figure 1: Mechanical and electrical interface for #sbcw18579 DN

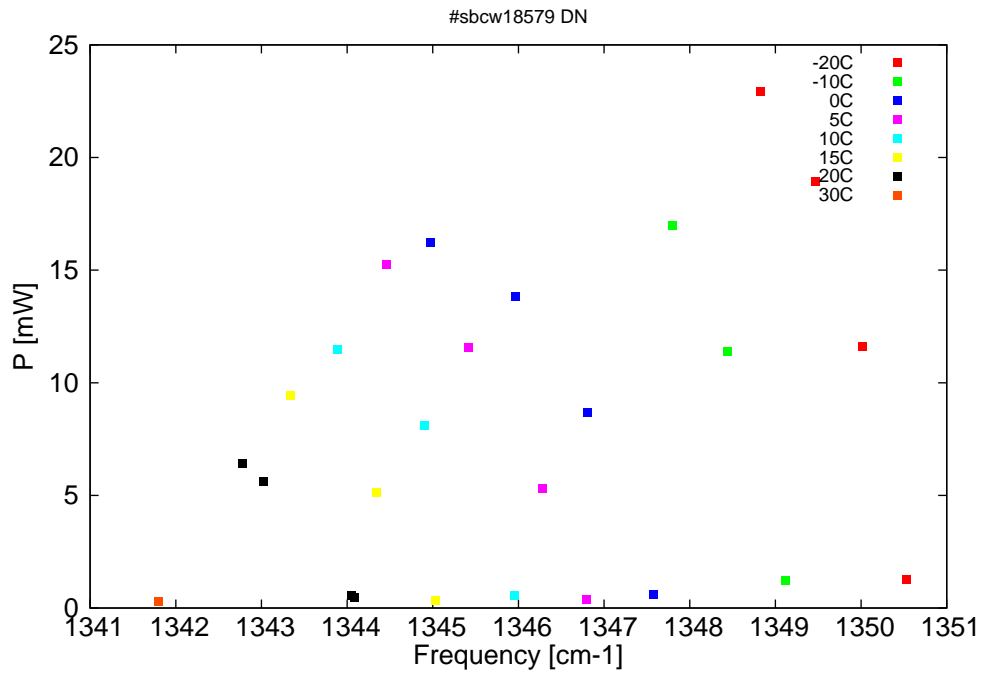


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

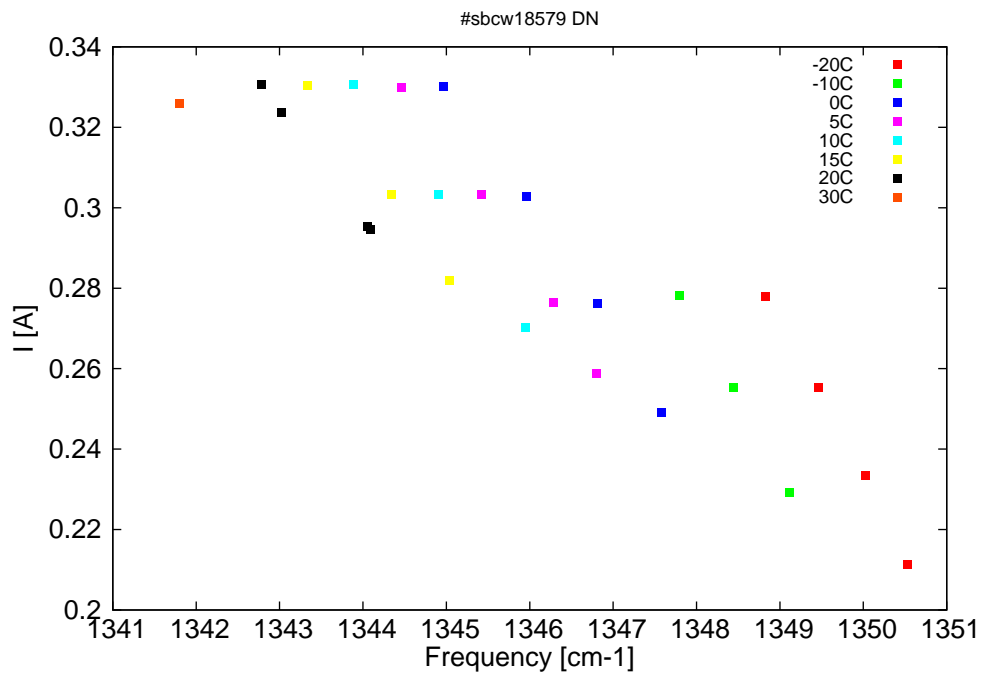


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
7404.5	1350.5	1.2	-20	12	0.21
7407.3	1350	11.6	-20	12.4	0.23
7410.3	1349.5	18.9	-20	12.7	0.26
7413.9	1348.8	22.9	-20	13.1	0.28
7412.3	1349.1	1.2	-10	12.2	0.23
7416	1348.4	11.4	-10	12.6	0.26
7419.5	1347.8	17	-10	13	0.28
7420.7	1347.6	0.6	0	12.4	0.25
7425	1346.8	8.7	0	12.9	0.28
7429.6	1346	13.8	0	13.3	0.3
7435.1	1345	16.2	0	13.8	0.33
7425	1346.8	0.4	5	12.5	0.26
7427.9	1346.3	5.3	5	12.8	0.28
7432.6	1345.4	11.5	5	13.3	0.3
7437.9	1344.5	15.3	5	13.8	0.33
7429.7	1345.9	0.5	10	12.7	0.27
7435.5	1344.9	8.1	10	13.2	0.3
7441.1	1343.9	11.5	10	13.7	0.33
7434.7	1345	0.3	15	12.8	0.28
7438.6	1344.3	5.1	15	13.2	0.3
7444.1	1343.3	9.4	15	13.6	0.33
7440	1344.1	0.5	20	13	0.29
7440.2	1344.1	0.6	20	12.9	0.3
7445.9	1343	5.6	20	13.4	0.32
7447.3	1342.8	6.4	20	13.6	0.33
7452.7	1341.8	0.3	30	13.3	0.33

Table 1: Singlemode optical output power as function of operating parameters.

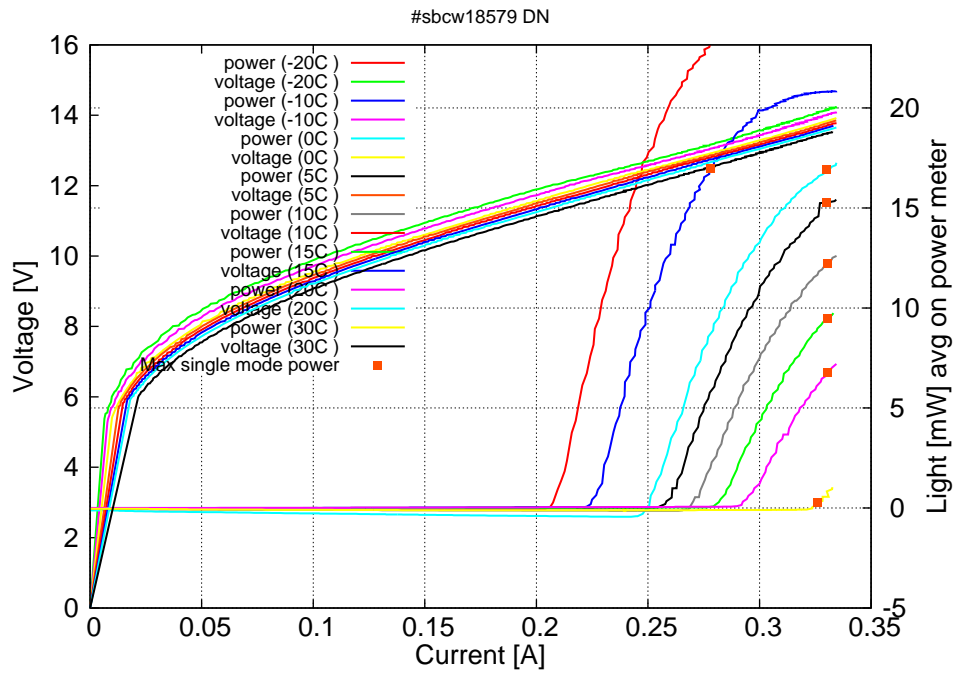


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.20A$ / $V_{th}=12.0V$ (2-wires measurements). Maximum operation current: 0.28A from -20C to -10C then 0.335A from 0C to 30C.

Figure 3: spectra at different temperatures for various DC currents

