

Datasheet for #sb14222 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with longer pulses, higher repetition rate, higher voltage or higher current than specified in this document may cause damage. It will result in loss of warranty, unless agreed upon with Alpes Lasers!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below.

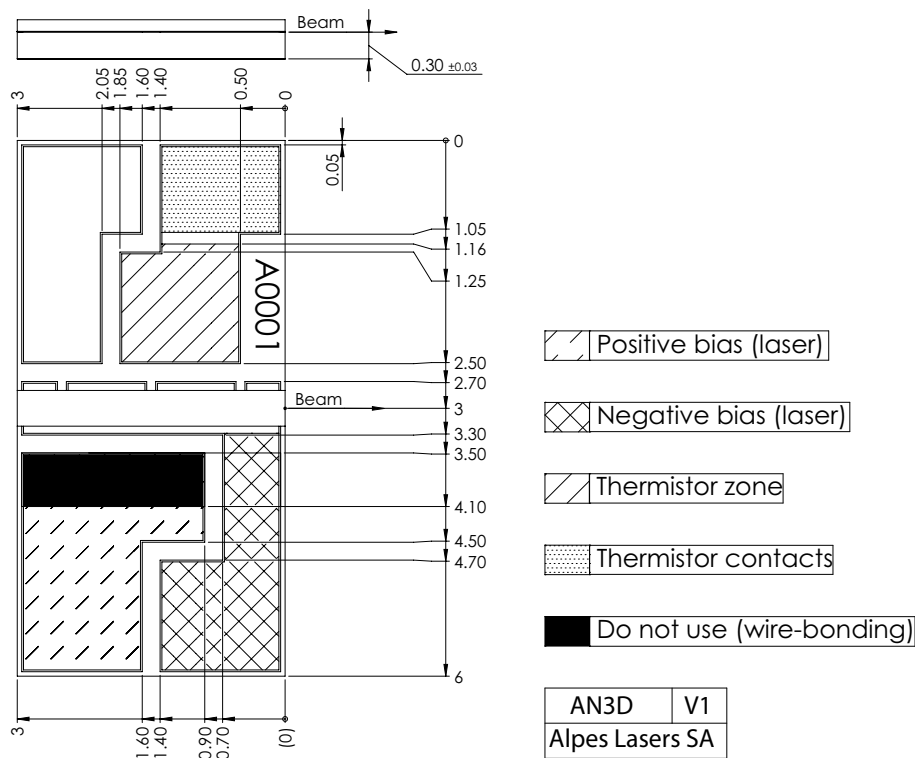


Figure 1: Mechanical and electrical interface for #sb14222 DN (please note that AlN submount numbering is P0539)

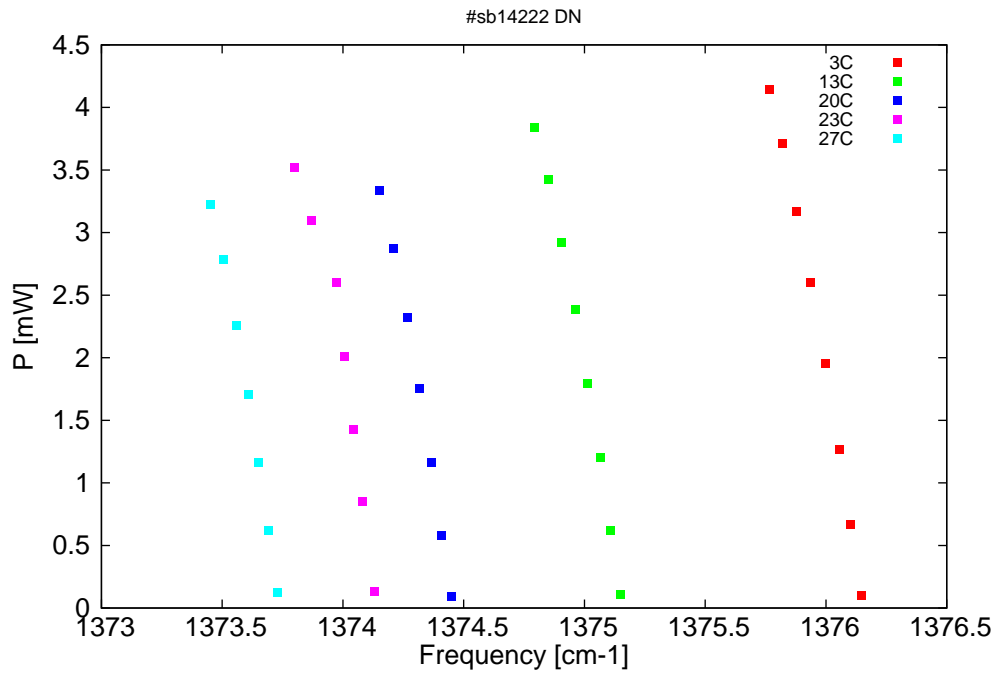


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

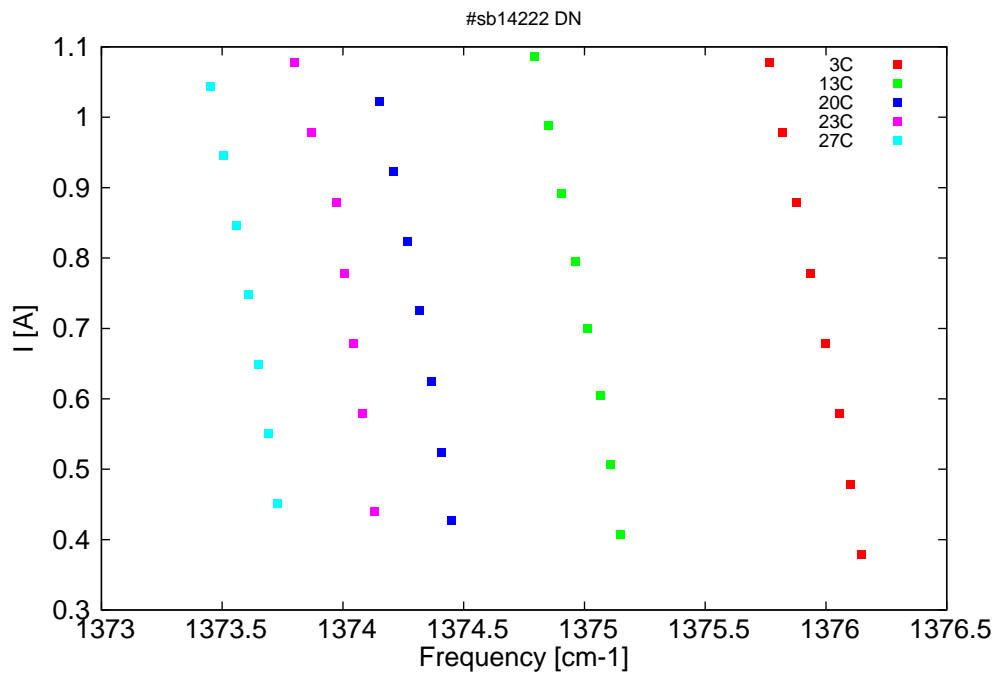


Figure 3: Peak current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{pulse} [V]	I_{pulse} [A]
7266.7	1376.1	0.1	3	11.4	0.38
7266.9	1376.1	0.7	3	12.6	0.48
7267.2	1376.1	1.3	3	13.8	0.58
7267.5	1376	2	3	15.3	0.68
7267.8	1375.9	2.6	3	16.8	0.78
7268.1	1375.9	3.2	3	18.1	0.88
7268.4	1375.8	3.7	3	19.4	0.98
7268.7	1375.8	4.1	3	20.5	1.08
7271.9	1375.1	0.1	13	11.4	0.41
7272.2	1375.1	0.6	13	12.4	0.51
7272.4	1375.1	1.2	13	13.6	0.6
7272.7	1375	1.8	13	14.8	0.7
7272.9	1375	2.4	13	16.1	0.8
7273.2	1374.9	2.9	13	17.4	0.89
7273.5	1374.8	3.4	13	18.7	0.99
7273.8	1374.8	3.8	13	19.8	1.09
7275.6	1374.4	0.1	20	11.4	0.43
7275.9	1374.4	0.6	20	12.4	0.52
7276.1	1374.4	1.2	20	13.5	0.63
7276.3	1374.3	1.8	20	14.7	0.72
7276.6	1374.3	2.3	20	15.9	0.82
7276.9	1374.2	2.9	20	17.2	0.92
7277.2	1374.2	3.3	20	18.5	1.02
7277.3	1374.1	0.1	23	11.4	0.44
7277.6	1374.1	0.9	23	12.8	0.58
7277.8	1374	1.4	23	13.9	0.68
7278	1374	2	23	15.1	0.78
7278.2	1374	2.6	23	16.4	0.88
7278.7	1373.9	3.1	23	17.6	0.98
7279.1	1373.8	3.5	23	18.8	1.08
7279.5	1373.7	0.1	27	11.5	0.45
7279.7	1373.7	0.6	27	12.4	0.55
7279.9	1373.7	1.2	27	13.4	0.65
7280.1	1373.6	1.7	27	14.5	0.75
7280.4	1373.6	2.3	27	15.7	0.85
7280.6	1373.5	2.8	27	16.9	0.95
7280.9	1373.5	3.2	27	18.1	1.04

Table 1: Singlemode optical output power as function of operating parameters.

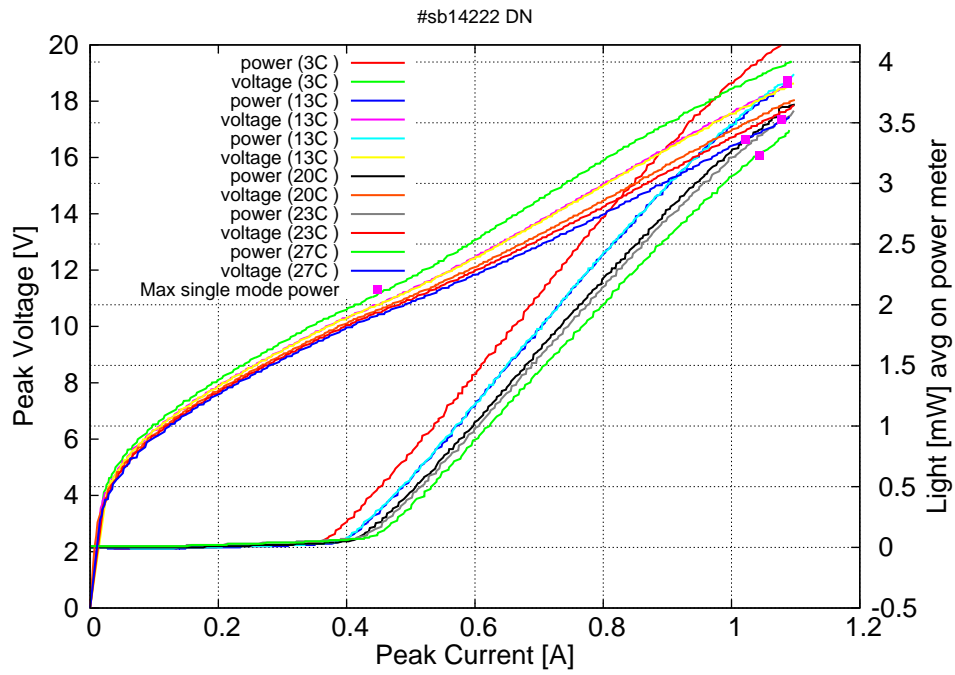
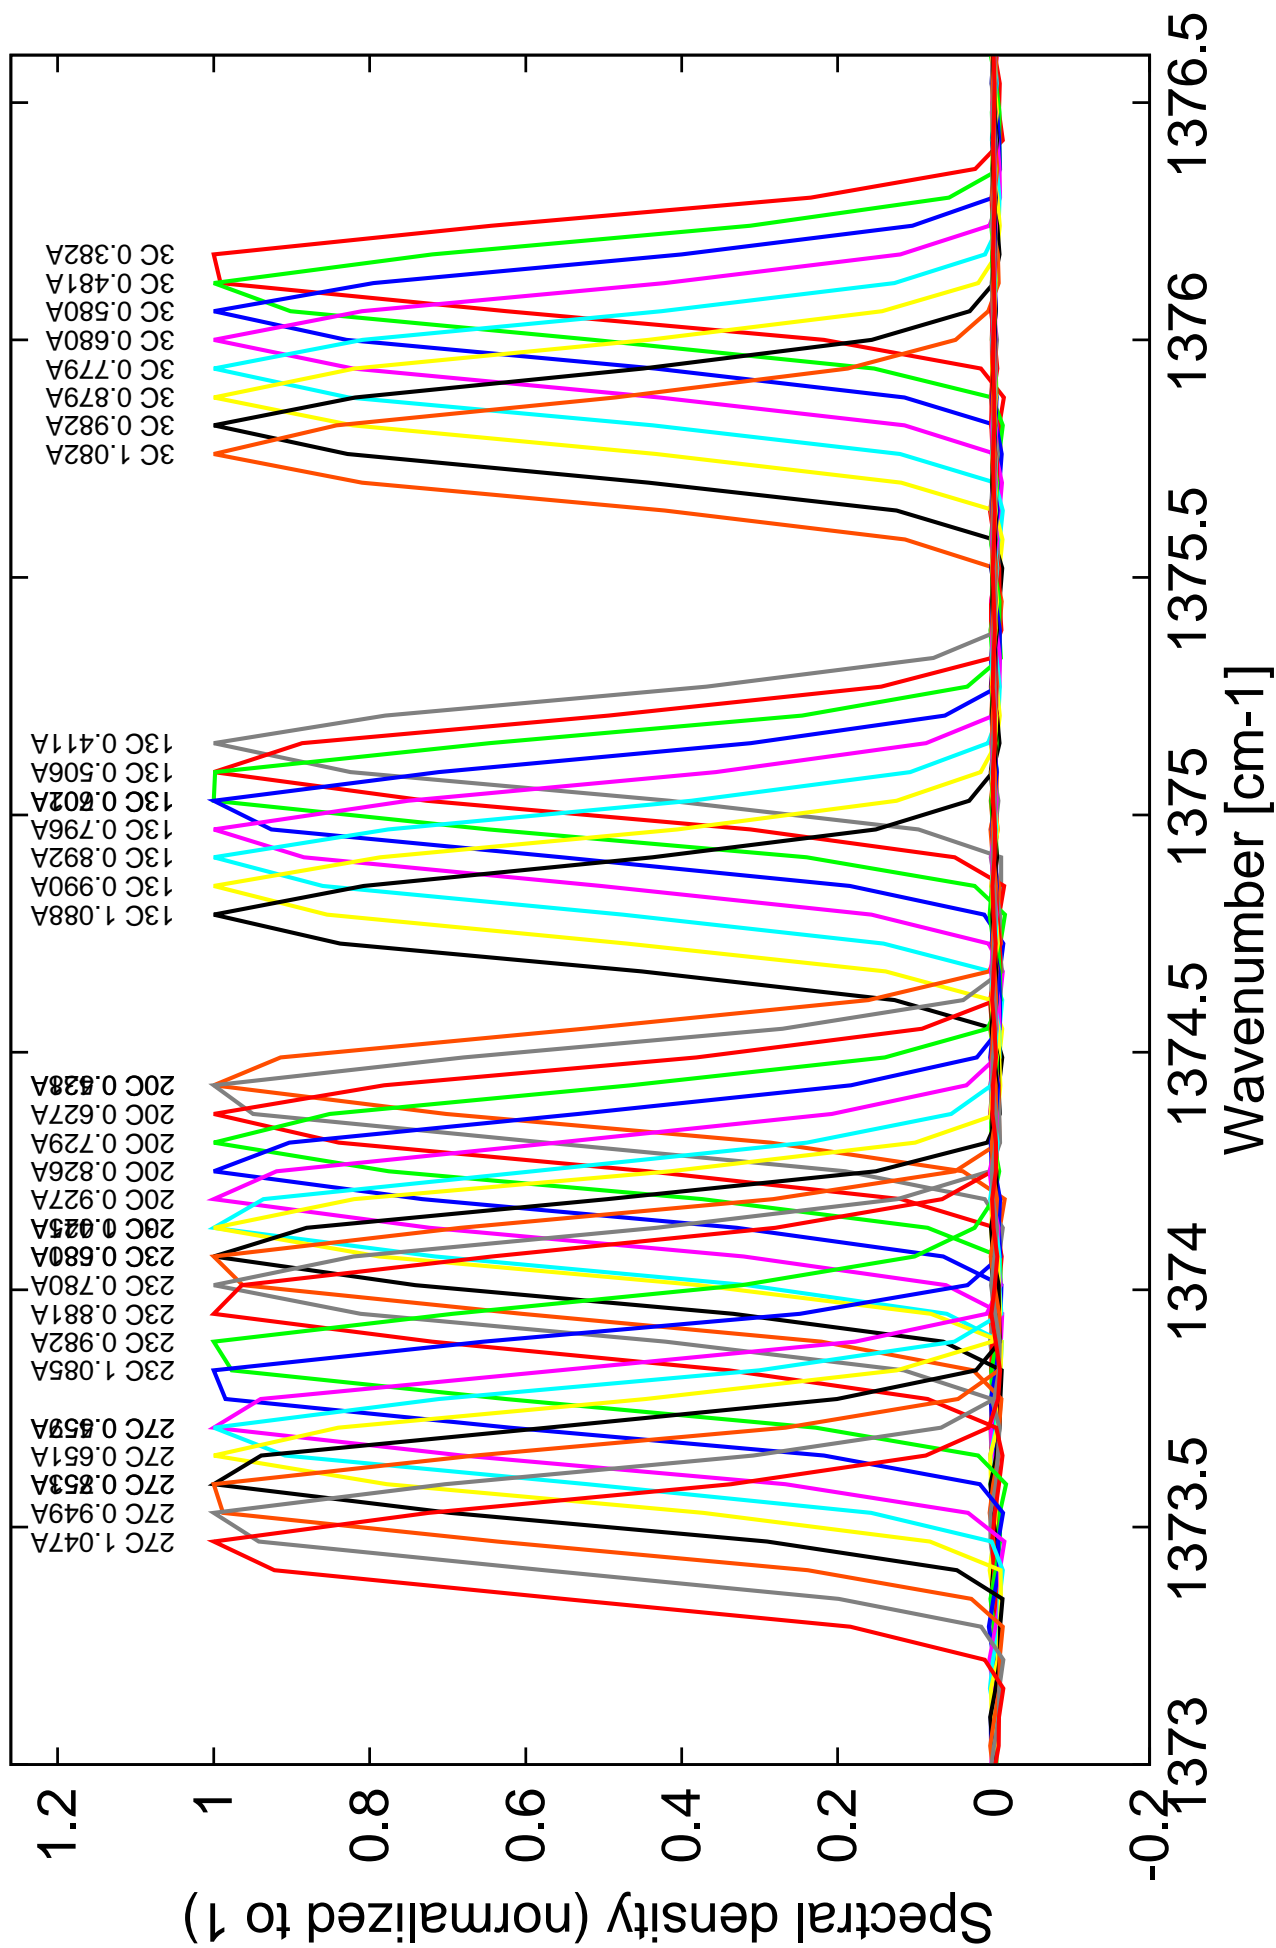


Figure 4: Peak voltage and average power vs peak current at 2% duty-cycle (500ns pulses on the laser) (the solid squares indicate the maximum singlemode emitted power)

Figure 3: spectra at ^{13}C for various peak currents at 2% duty cycle (20ns pulses on the laser)



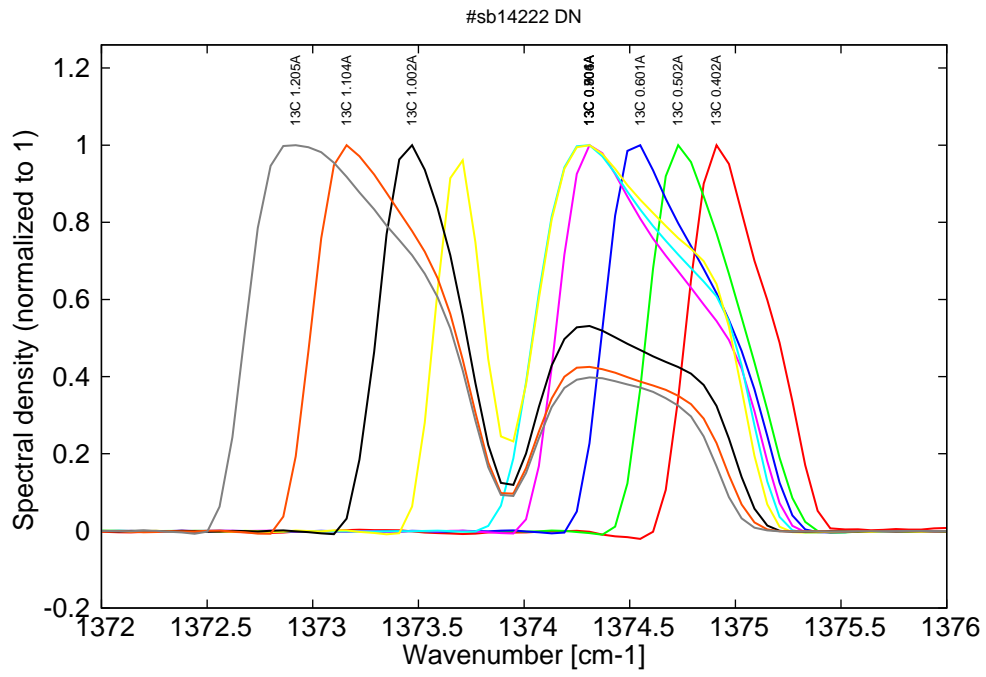


Figure 5: spectra at ^{13}C for various peak currents at 2% duty cycle (500ns pulses on the laser)