

**Datasheet for #sbcw20723 DN**

Recommendations:

Please read the User Manual and have a look at the FAQ at  
<http://www.alpeslasers.ch/?a=142>

**WARNING:** Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

**WARNING:** Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw20723 DN

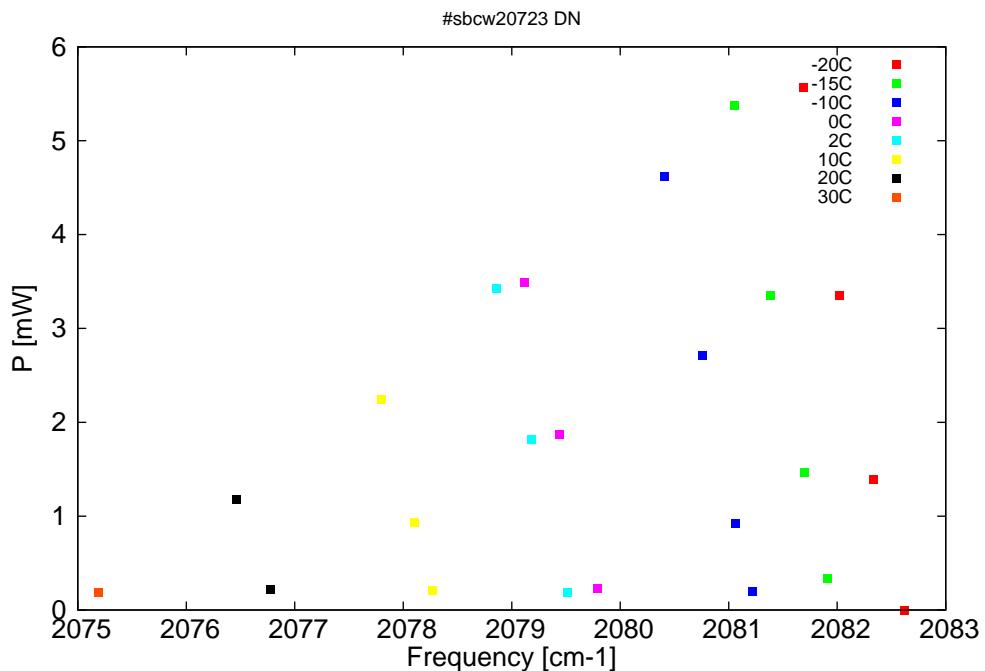


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

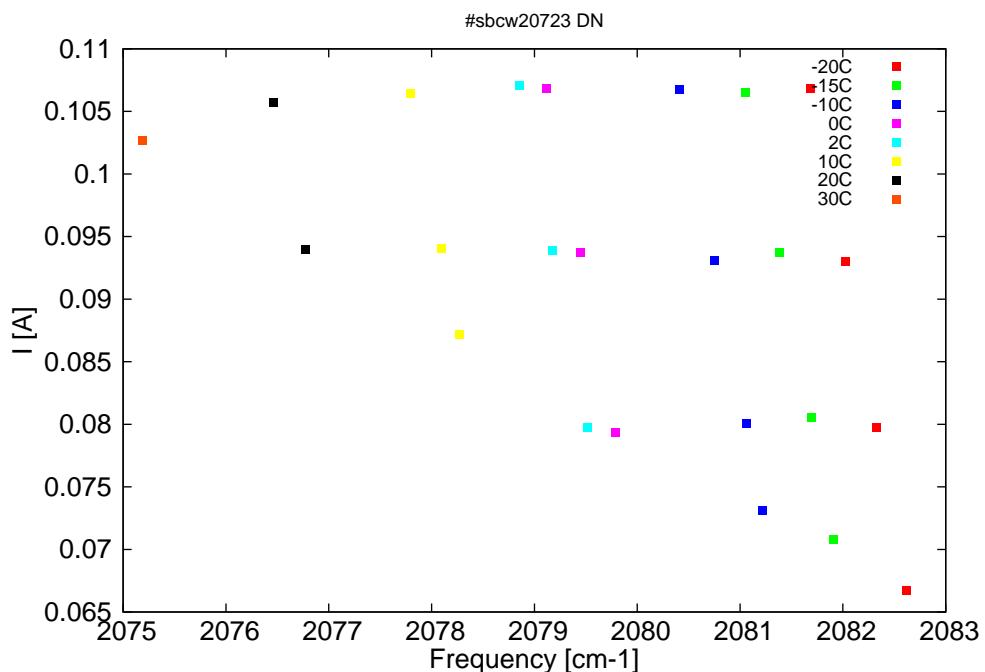


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

$\lambda$ [nm]	$\nu$ [cm $^{-1}$ ]	P[mW]	Temp[°C]	$U_{LASER}$ [V]	I[A]
4801.6	2082.6	0	-20	11.97	0.067
4802.3	2082.3	1.4	-20	12.33	0.08
4803	2082	3.4	-20	12.68	0.093
4803.8	2081.7	5.6	-20	13.05	0.107
4803.3	2081.9	0.3	-15	12	0.071
4803.8	2081.7	1.5	-15	12.25	0.081
4804.5	2081.4	3.3	-15	12.61	0.094
4805.3	2081.1	5.4	-15	12.95	0.107
4804.9	2081.2	0.2	-10	11.99	0.073
4805.2	2081.1	0.9	-10	12.17	0.08
4805.9	2080.8	2.7	-10	12.5	0.093
4806.7	2080.4	4.6	-10	12.86	0.107
4808.2	2079.8	0.2	0	12	0.079
4809	2079.4	1.9	0	12.36	0.094
4809.7	2079.1	3.5	0	12.69	0.107
4808.8	2079.5	0.2	2	12	0.08
4809.6	2079.2	1.8	2	12.34	0.094
4810.3	2078.9	3.4	2	12.66	0.107
4811.7	2078.3	0.2	10	12.04	0.087
4812.1	2078.1	0.9	10	12.2	0.094
4812.8	2077.8	2.2	10	12.48	0.106
4815.2	2076.8	0.2	20	12.08	0.094
4815.9	2076.5	1.2	20	12.34	0.106
4818.8	2075.2	0.2	30	12.17	0.103

Table 1: Singlemode optical output power as function of operating parameters.

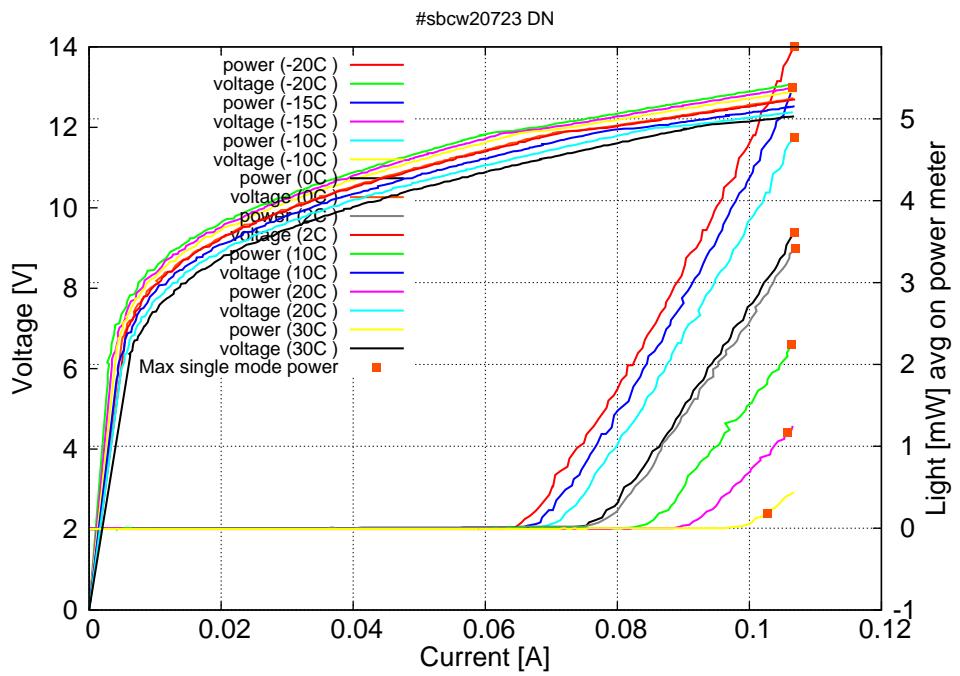


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C:  $I_{th}=0.07A$  /  $V_{th}=11.9V$  (2-wires measurements). Maximum operation current: 0.107A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

