

Datasheet for #sbcw24060 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.

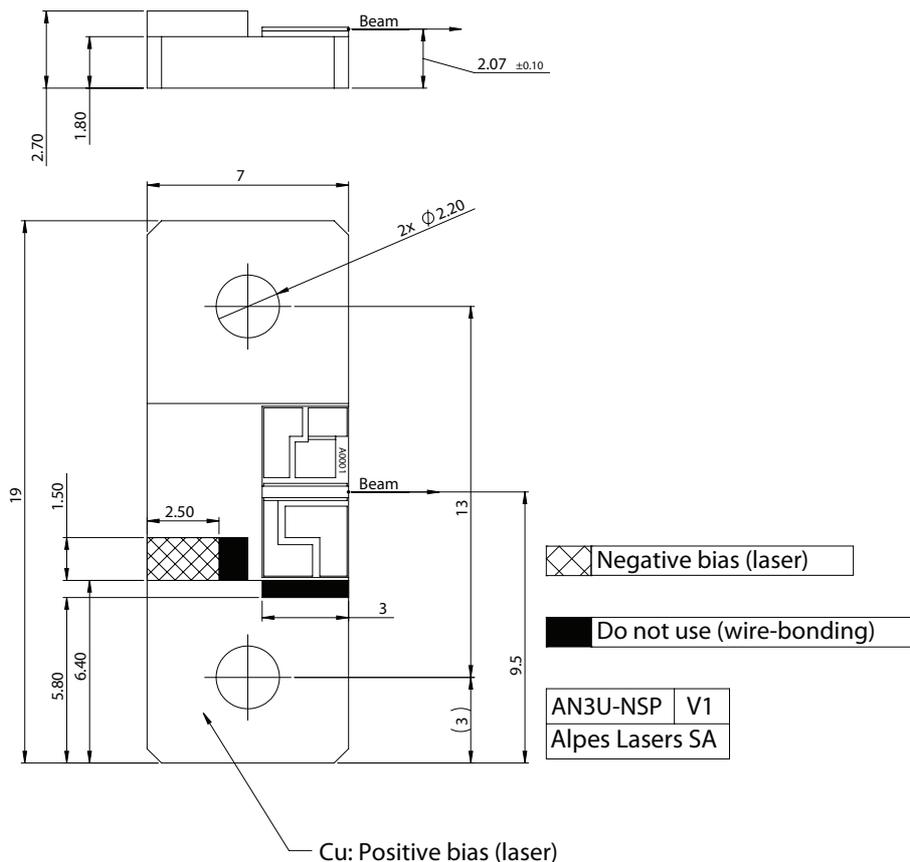


Figure 1: Mechanical and electrical interface for #sbcw24060 DN

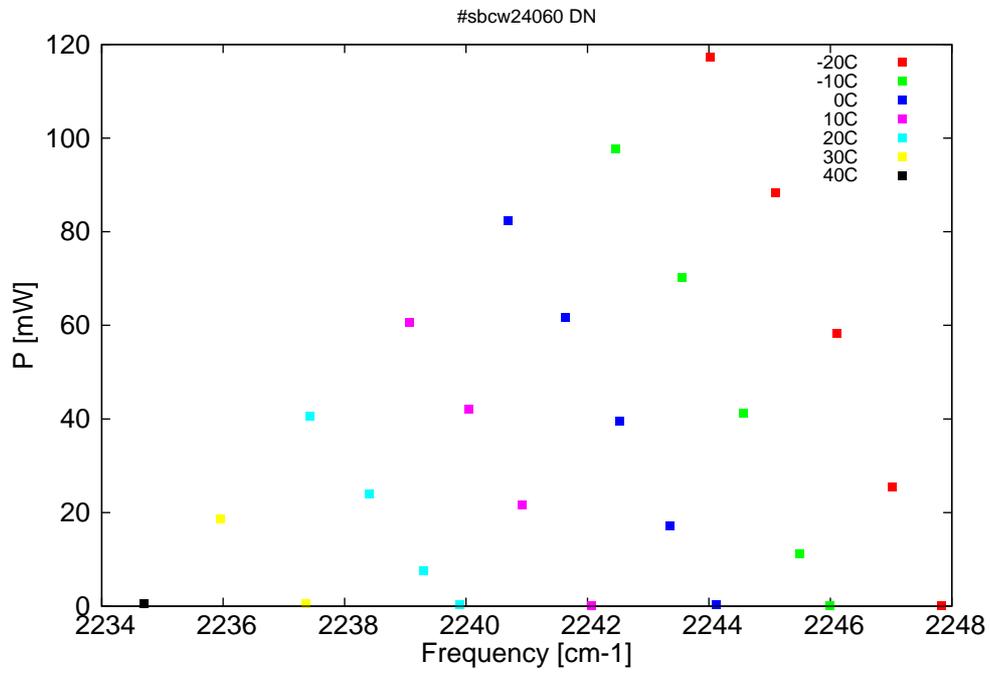


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

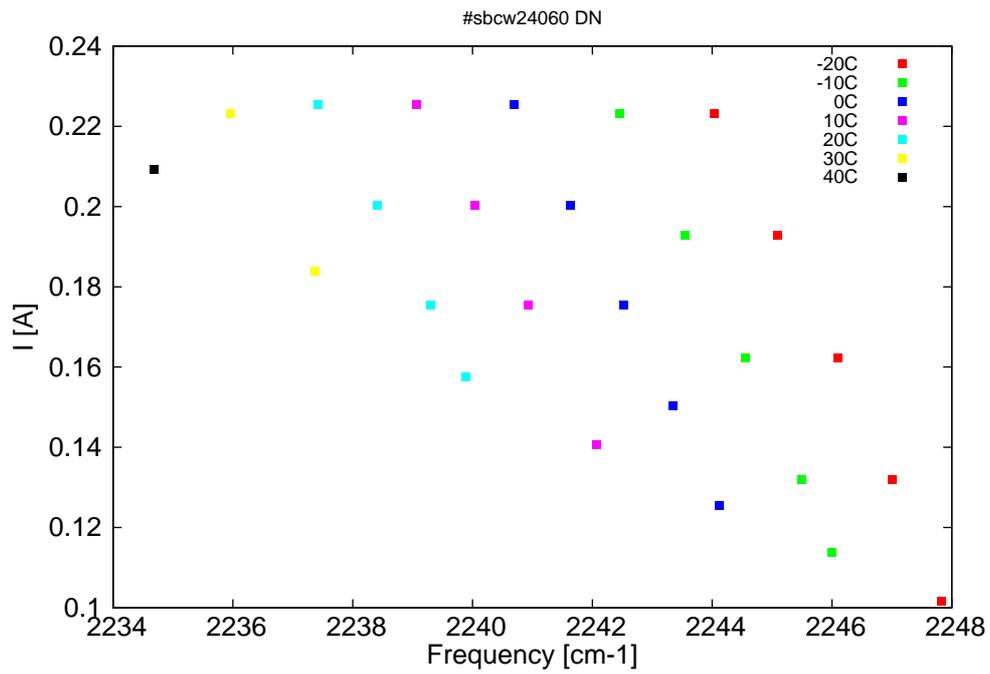


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
4448.7	2247.8	0.2	-20	11.93	0.102
4450.4	2247	25.4	-20	12.19	0.132
4452.1	2246.1	58.3	-20	12.49	0.162
4454.2	2245.1	88.3	-20	12.77	0.193
4456.3	2244	117.3	-20	13.05	0.223
4452.4	2246	0.1	-10	11.99	0.114
4453.4	2245.5	11.3	-10	12.13	0.132
4455.2	2244.6	41.3	-10	12.41	0.162
4457.2	2243.6	70.3	-10	12.69	0.193
4459.4	2242.5	97.7	-10	12.96	0.223
4456.1	2244.1	0.4	0	12.05	0.126
4457.6	2243.4	17.1	0	12.24	0.15
4459.3	2242.5	39.5	0	12.47	0.175
4461	2241.6	61.8	0	12.69	0.2
4462.9	2240.7	82.5	0	12.91	0.225
4460.2	2242.1	0.2	10	12.13	0.141
4462.4	2240.9	21.6	10	12.39	0.175
4464.2	2240	42	10	12.61	0.2
4466.2	2239.1	60.7	10	12.82	0.225
4464.5	2239.9	0.3	20	12.22	0.158
4465.7	2239.3	7.5	20	12.34	0.175
4467.5	2238.4	24.1	20	12.53	0.2
4469.4	2237.4	40.6	20	12.73	0.225
4469.5	2237.4	0.6	30	12.37	0.184
4472.4	2236	18.6	30	12.62	0.223
4474.9	2234.7	0.5	40	12.53	0.209

Table 1: Singlemode optical output power as function of operating parameters.

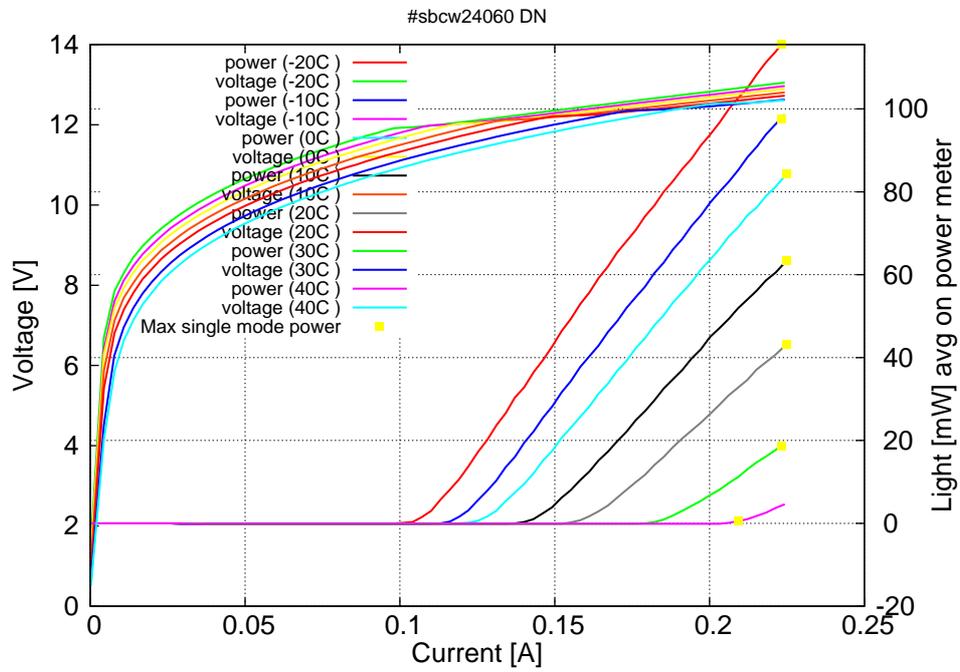


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.10A$ / $V_{th}=11.9V$ (2-wires measurements). Maximum operation current: 0.225A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

