

Datasheet for #sbcw24289 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at
<http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.

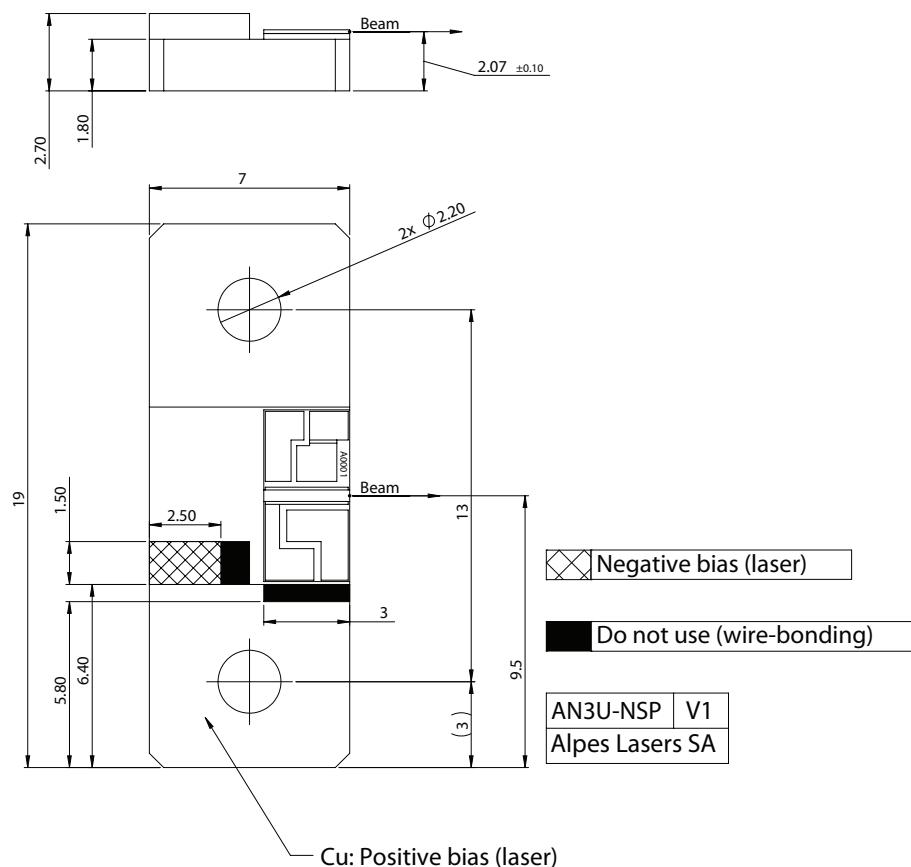


Figure 1: Mechanical and electrical interface for #sbcw24289 DN

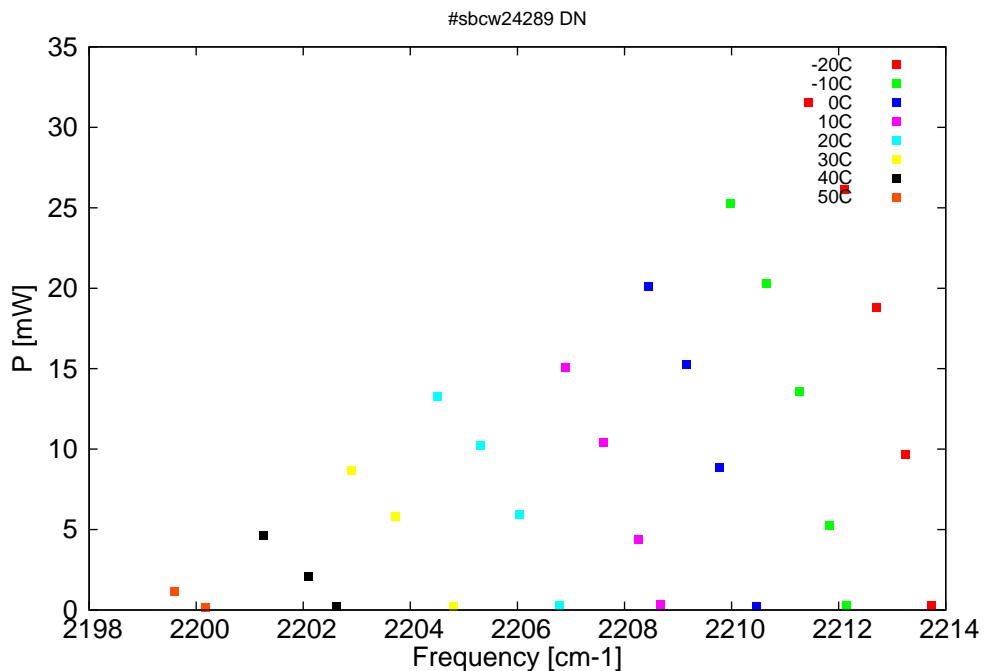


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

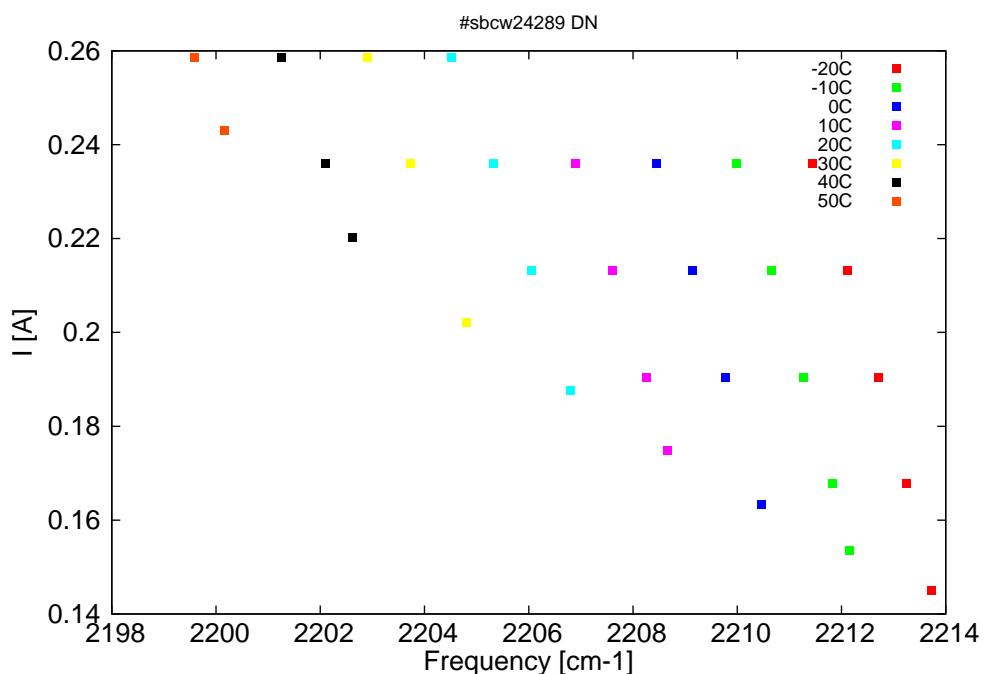


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm $^{-1}$]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
4517.3	2213.7	0.3	-20	9	0.145
4518.3	2213.2	9.7	-20	9.22	0.168
4519.4	2212.7	18.8	-20	9.45	0.191
4520.6	2212.1	26.1	-20	9.67	0.213
4521.9	2211.4	31.5	-20	9.91	0.236
4520.5	2212.1	0.3	-10	9.05	0.154
4521.2	2211.8	5.3	-10	9.19	0.168
4522.3	2211.3	13.6	-10	9.41	0.191
4523.5	2210.7	20.3	-10	9.64	0.213
4524.9	2210	25.3	-10	9.88	0.236
4523.9	2210.5	0.2	0	9.11	0.163
4525.3	2209.8	8.9	0	9.38	0.191
4526.6	2209.2	15.2	0	9.61	0.213
4528.1	2208.5	20.1	0	9.85	0.236
4527.6	2208.7	0.4	10	9.19	0.175
4528.4	2208.3	4.4	10	9.35	0.191
4529.8	2207.6	10.4	10	9.58	0.213
4531.2	2206.9	15.1	10	9.82	0.236
4531.5	2206.8	0.3	20	9.3	0.188
4533	2206	6	20	9.55	0.213
4534.5	2205.3	10.2	20	9.79	0.236
4536.1	2204.5	13.3	20	10.04	0.259
4535.6	2204.8	0.2	30	9.42	0.202
4537.8	2203.7	5.8	30	9.77	0.236
4539.5	2202.9	8.7	30	10.02	0.259
4540	2202.6	0.2	40	9.6	0.22
4541.1	2202.1	2.1	40	9.75	0.236
4542.9	2201.3	4.6	40	10	0.259
4545.1	2200.2	0.1	50	9.83	0.243
4546.3	2199.6	1.2	50	9.99	0.259

Table 1: Singlemode optical output power as function of operating parameters.

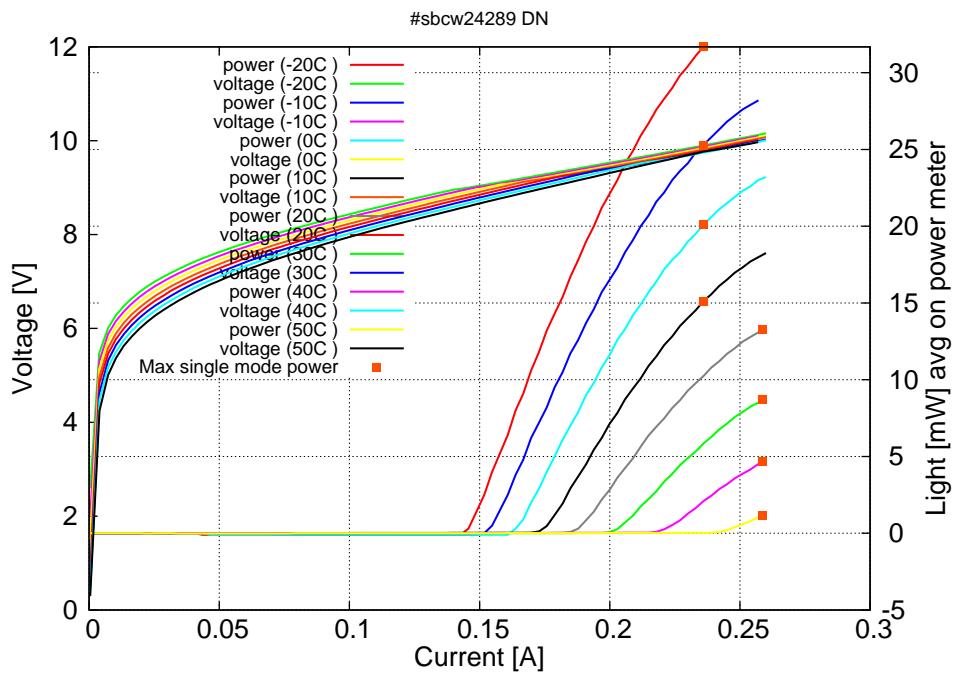


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.14A$ / $V_{th}=9.0V$ (2-wires measurements). Maximum operation current: 0.24A between -20C and 10C, 0.26A between 20C and 50C.

Figure 3: spectra at different temperatures for various DC currents

