

**Datasheet for #sbcw24478 DN**

Recommendations:

Please read the User Manual and have a look at the FAQ at <https://www.alpeslasers.ch/resources/#faq>

**WARNING:** Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

**WARNING:** Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw24478 DN (please note that AlN submount numbering is A1190)

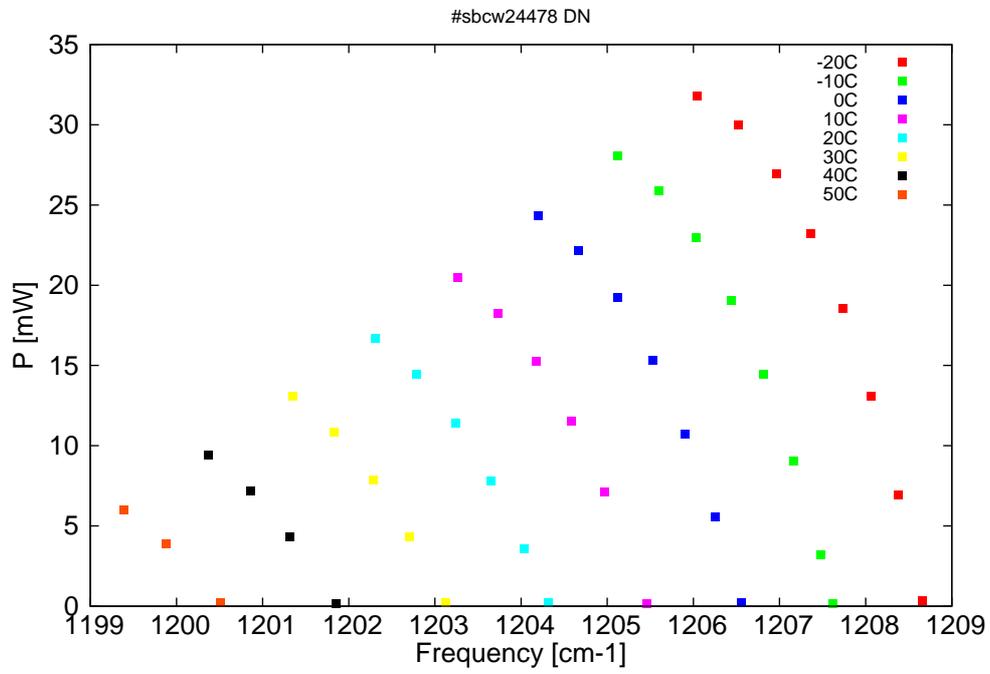


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

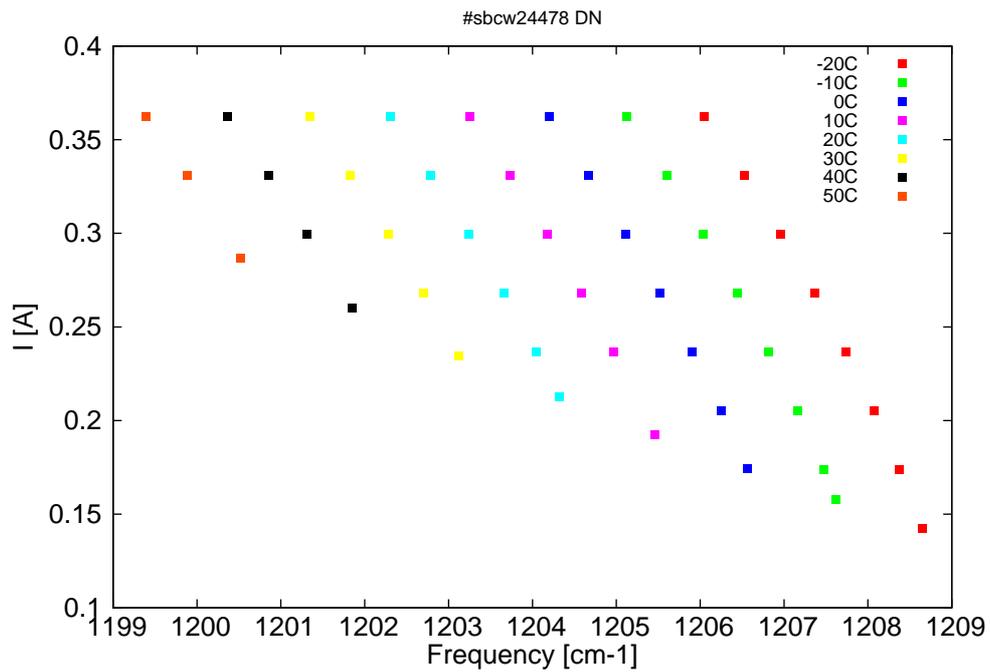


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

$\lambda$ [nm]	$\nu$ [cm <sup>-1</sup> ]	P[mW]	Temp[°C]	$U_{LASER}$ [V]	I[A]
8273.7	1208.7	0.3	-20	8.53	0.142
8275.6	1208.4	6.9	-20	9.07	0.174
8277.7	1208.1	13.1	-20	9.6	0.205
8280	1207.7	18.5	-20	10.13	0.237
8282.5	1207.4	23.2	-20	10.65	0.268
8285.3	1207	27	-20	11.17	0.3
8288.3	1206.5	30	-20	11.68	0.331
8291.5	1206	31.8	-20	12.17	0.363
8280.8	1207.6	0.2	-10	8.6	0.158
8281.7	1207.5	3.2	-10	8.87	0.174
8283.9	1207.2	9.1	-10	9.38	0.205
8286.3	1206.8	14.4	-10	9.88	0.237
8288.8	1206.4	19.1	-10	10.36	0.268
8291.6	1206	23	-10	10.85	0.3
8294.6	1205.6	25.9	-10	11.33	0.331
8297.9	1205.1	28.1	-10	11.79	0.363
8288	1206.6	0.2	0	8.69	0.174
8290.2	1206.2	5.5	0	9.16	0.205
8292.6	1205.9	10.7	0	9.65	0.237
8295.1	1205.5	15.4	0	10.11	0.268
8297.9	1205.1	19.2	0	10.58	0.3
8301	1204.7	22.2	0	11.02	0.331
8304.3	1204.2	24.3	0	11.46	0.363
8295.6	1205.5	0.2	10	8.78	0.192
8299	1205	7.1	10	9.44	0.237
8301.6	1204.6	11.6	10	9.89	0.268
8304.4	1204.2	15.2	10	10.32	0.3
8307.5	1203.7	18.2	10	10.75	0.331
8310.8	1203.3	20.5	10	11.17	0.363
8303.4	1204.3	0.2	20	8.9	0.212
8305.4	1204	3.6	20	9.24	0.237
8308	1203.7	7.8	20	9.67	0.268
8310.9	1203.2	11.4	20	10.09	0.3
8314	1202.8	14.4	20	10.5	0.331
8317.3	1202.3	16.7	20	10.9	0.363
8311.7	1203.1	0.2	30	9.02	0.235
8314.6	1202.7	4.3	30	9.48	0.268
8317.5	1202.3	7.8	30	9.88	0.3
8320.6	1201.8	10.8	30	10.27	0.331
8324	1201.3	13.1	30	10.66	0.363
8320.5	1201.8	0.2	40	9.2	0.26
8324.2	1201.3	4.3	40	9.7	0.3
8327.4	1200.9	7.2	40	10.08	0.331
8330.8	1200.4	9.4	40	10.45	0.363
8329.7	1200.5	0.2	50	9.36	0.287
8334.1	1199.9	3.9	50	9.88	0.331
8337.6	1199.4	6	50	10.24	0.363

*continued on next page*

$\lambda$ [nm]    $\nu$ [ $\text{cm}^{-1}$ ]   P[mW]   Temp[ $^{\circ}\text{C}$ ]    $U_{LASER}$ [V]   I[A]  
 Table 1: Singlemode optical output power as function of operating parameters.

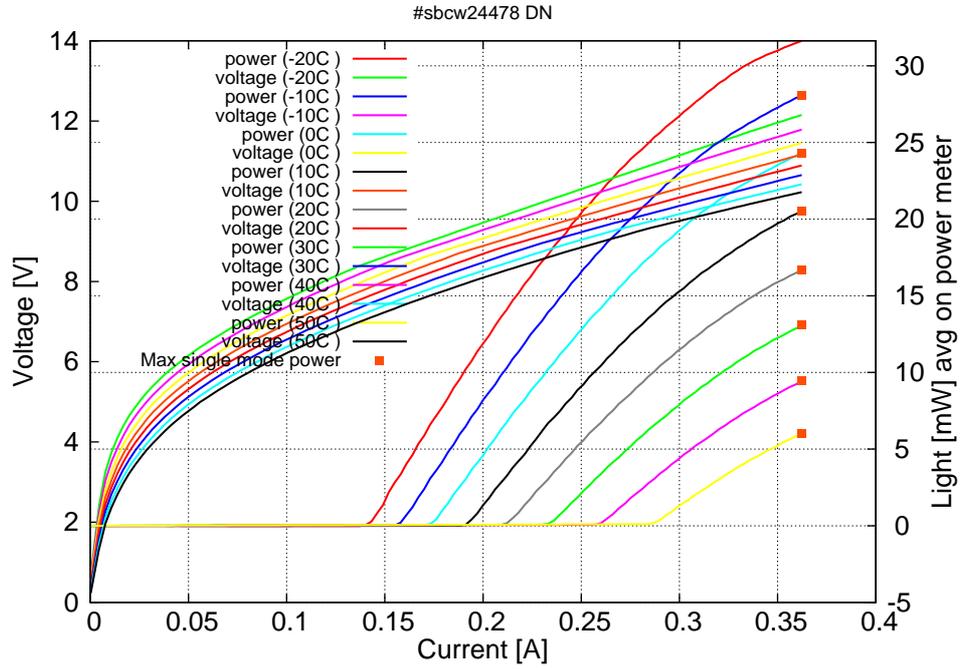


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C:  $I_{th}=0.14\text{A}$  /  $V_{th}=8.4\text{V}$  (2-wires measurements). Maximum operation current: 0.365A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

