

Datasheet for #sbcw24943 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at
<http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw24943 DN (please note that AlN submount numbering is P2837)

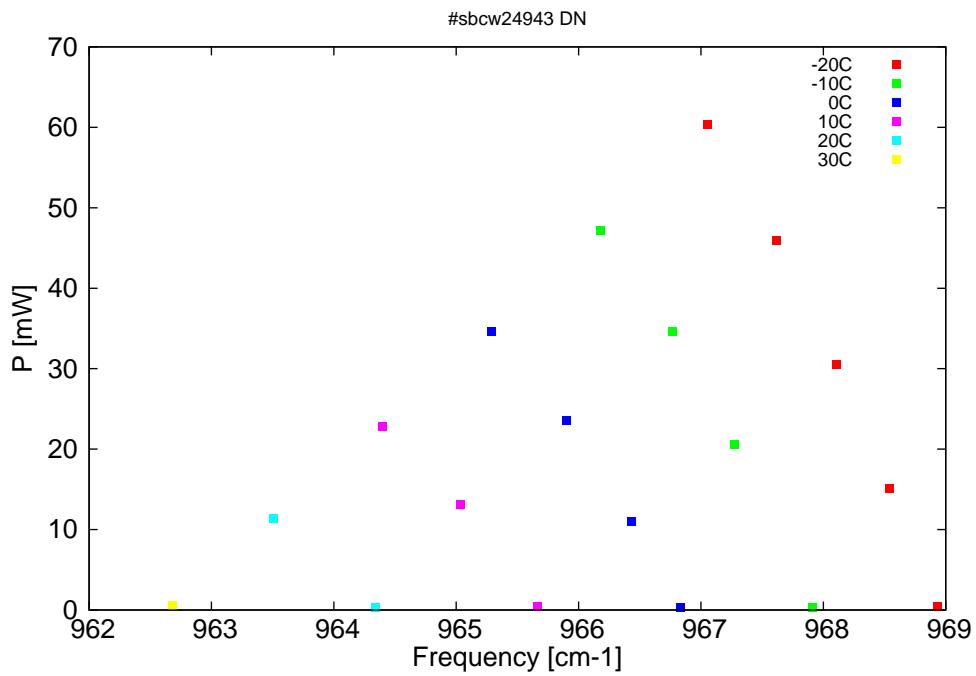


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

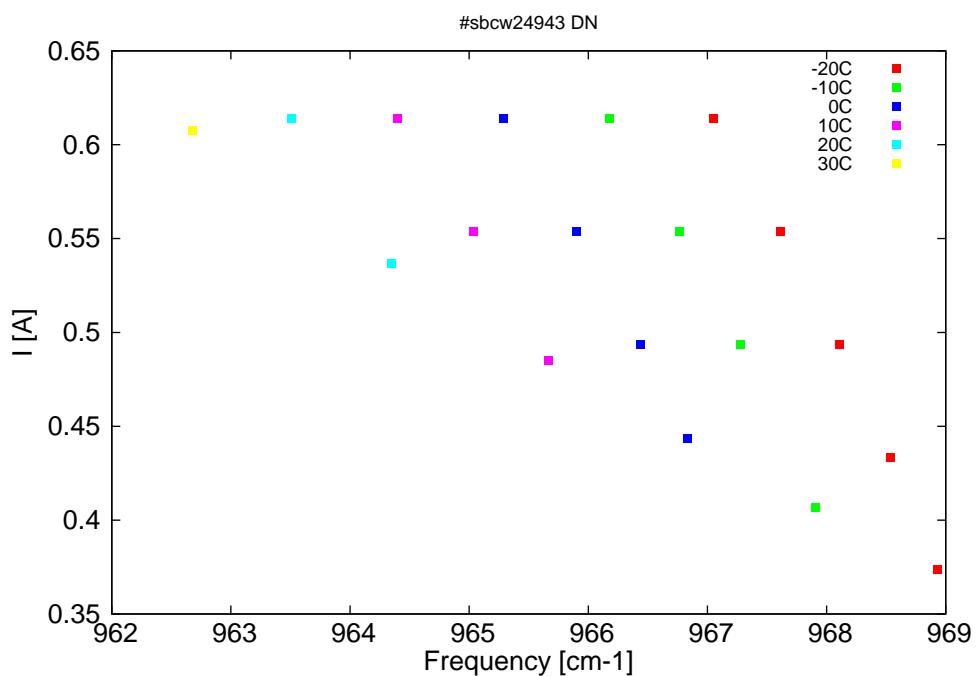


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm $^{-1}$]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
10320.6	968.9	0.5	-20	8.21	0.374
10324.8	968.5	15.1	-20	8.51	0.434
10329.4	968.1	30.6	-20	8.83	0.494
10334.7	967.6	46	-20	9.15	0.554
10340.7	967	60.3	-20	9.53	0.614
10331.6	967.9	0.4	-10	8.35	0.407
10338.3	967.3	20.5	-10	8.81	0.494
10343.8	966.8	34.6	-10	9.15	0.554
10350.1	966.2	47.2	-10	9.54	0.614
10343.1	966.8	0.3	0	8.51	0.444
10347.3	966.4	10.9	0	8.79	0.494
10353	965.9	23.5	0	9.14	0.554
10359.6	965.3	34.6	0	9.54	0.614
10355.5	965.7	0.4	10	8.74	0.485
10362.3	965	13.1	10	9.14	0.554
10369.1	964.4	22.8	10	9.55	0.614
10369.7	964.3	0.3	20	9.04	0.537
10378.7	963.5	11.4	20	9.56	0.614
10387.7	962.7	0.6	30	9.52	0.607

Table 1: Singlemode optical output power as function of operating parameters.

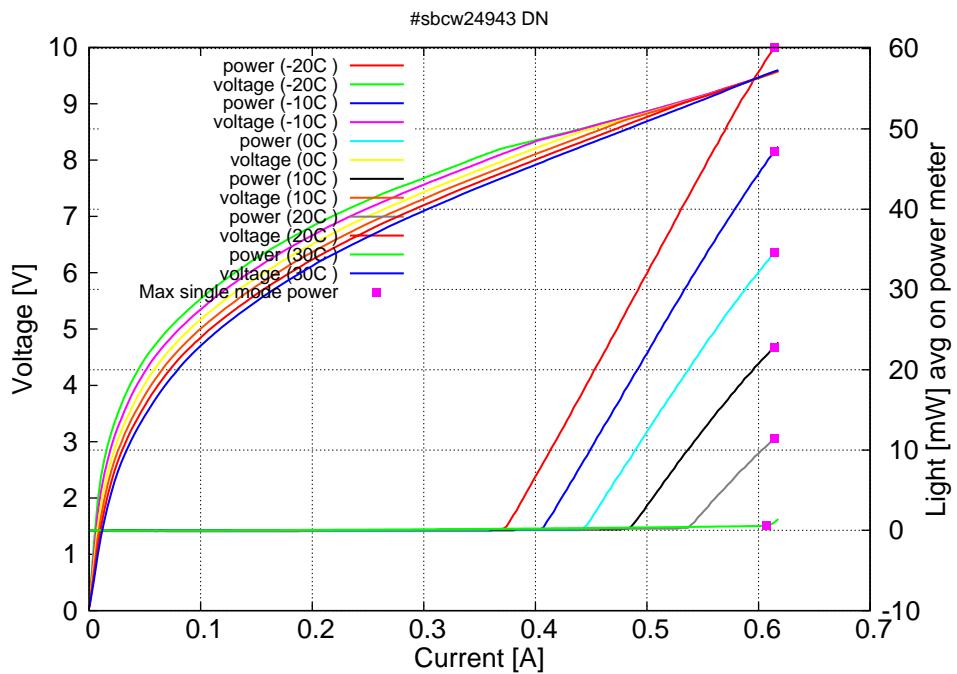


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.37A$ / $V_{th}=8.2V$ (2-wires measurements). Maximum operation current: 0.620A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

