

**Datasheet for #sbcw25503 DN**

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

**WARNING:** Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

**WARNING:** Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw25503 DN (please note that AlN submount numbering is A12M4)

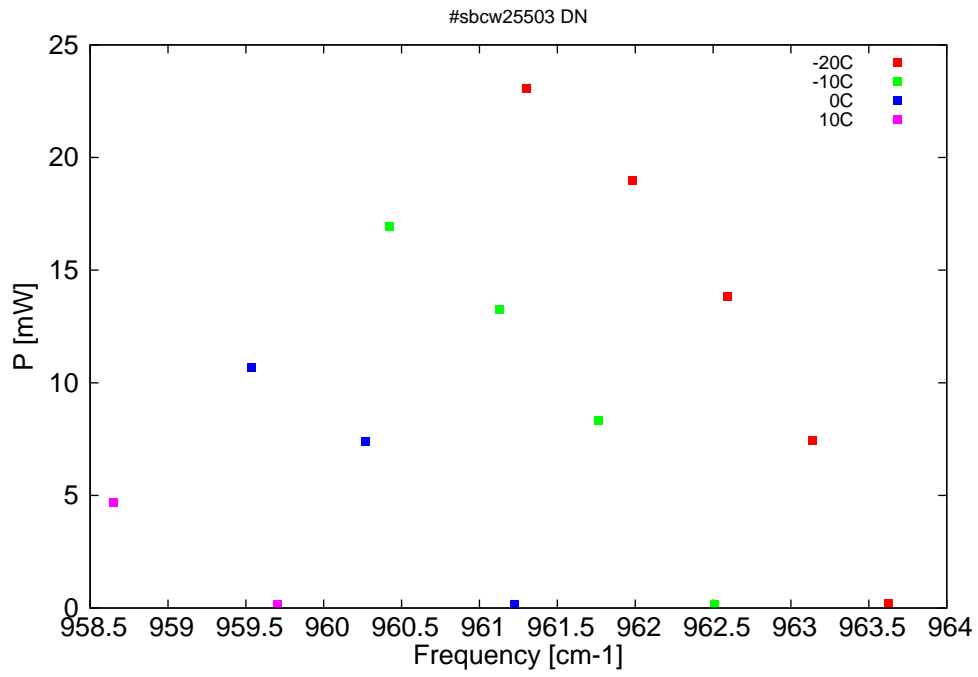


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

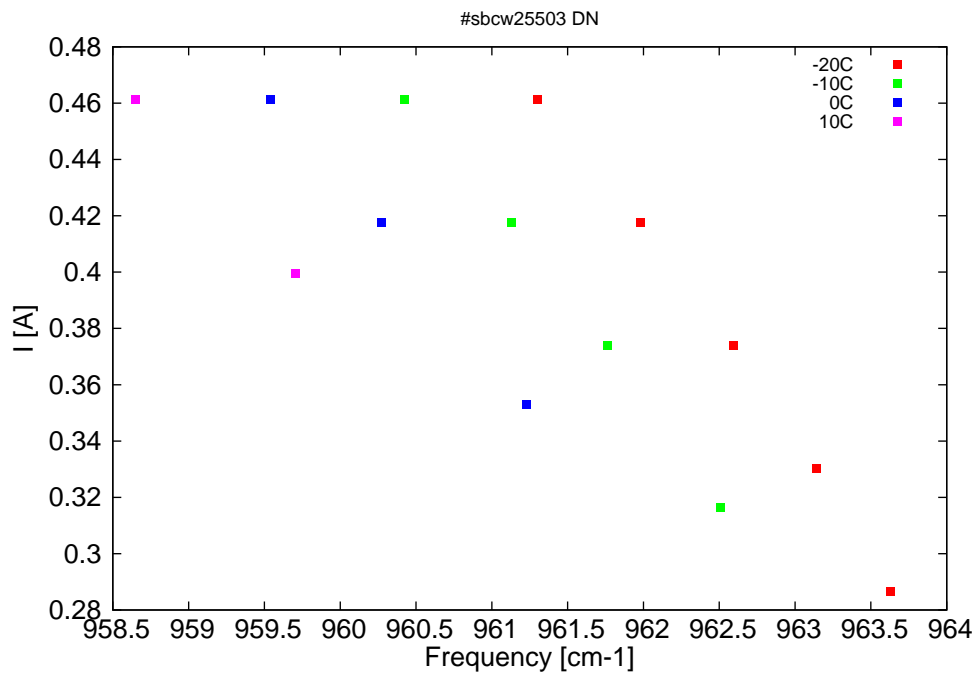


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

$\lambda$ [nm]	$\nu$ [ $\text{cm}^{-1}$ ]	P[mW]	Temp[ $^{\circ}\text{C}$ ]	$U_{LASER}$ [V]	I[A]
10377.4	963.6	0.2	-20	9.63	0.287
10382.7	963.1	7.5	-20	10.02	0.33
10388.6	962.6	13.8	-20	10.41	0.374
10395.2	962	19	-20	10.81	0.418
10402.6	961.3	23.1	-20	11.2	0.461
10389.5	962.5	0.2	-10	9.8	0.316
10397.5	961.8	8.3	-10	10.32	0.374
10404.4	961.1	13.3	-10	10.72	0.418
10412.1	960.4	16.9	-10	11.13	0.461
10403.4	961.2	0.2	0	10.07	0.353
10413.7	960.3	7.4	0	10.68	0.418
10421.7	959.5	10.7	0	11.09	0.461
10419.9	959.7	0.2	10	10.51	0.4
10431.4	958.6	4.7	10	11.1	0.461

Table 1: Singlemode optical output power as function of operating parameters.

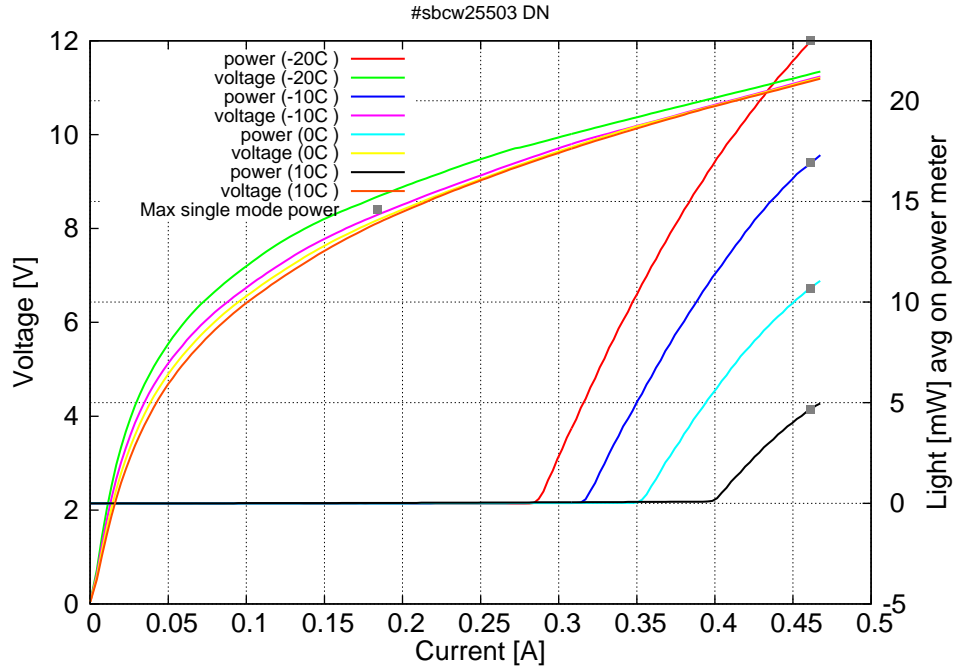


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C:  $I_{th}=0.28\text{A}$  /  $V_{th}=9.6\text{V}$  (2-wires measurements). Maximum operation current:  $0.470\text{A}$  for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

