

**Datasheet for #sbcw10539 DN**
Recommendations:

Please read the User Manual and have a look at the FAQ at  
<http://www.alpeslasers.ch/?a=142>

**WARNING:** Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

**WARNING:** Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To use with a power-supply ILX Lightwave LDX-3232 or equivalent.

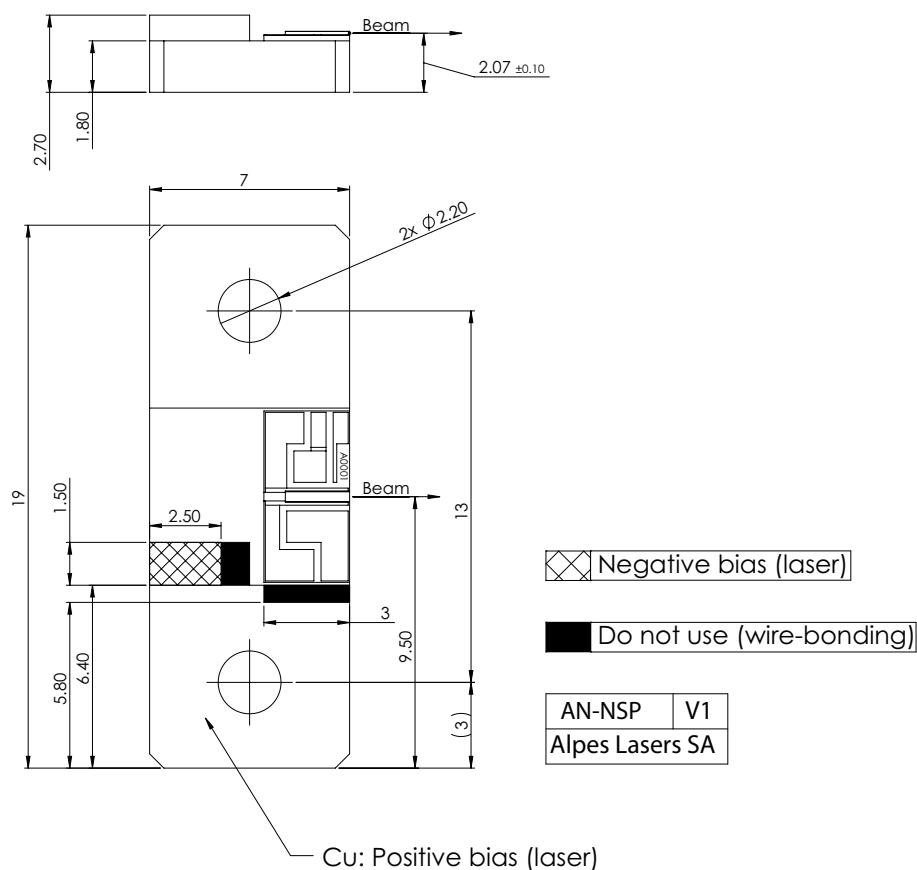


Figure 1: Mechanical and electrical interface for #sbcw10539 DN

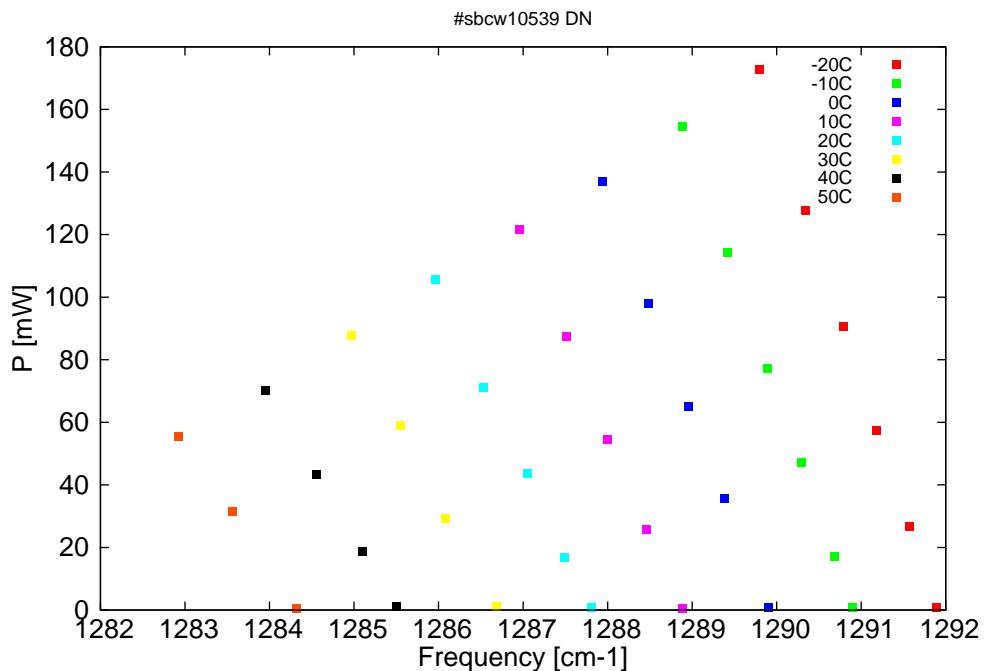


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

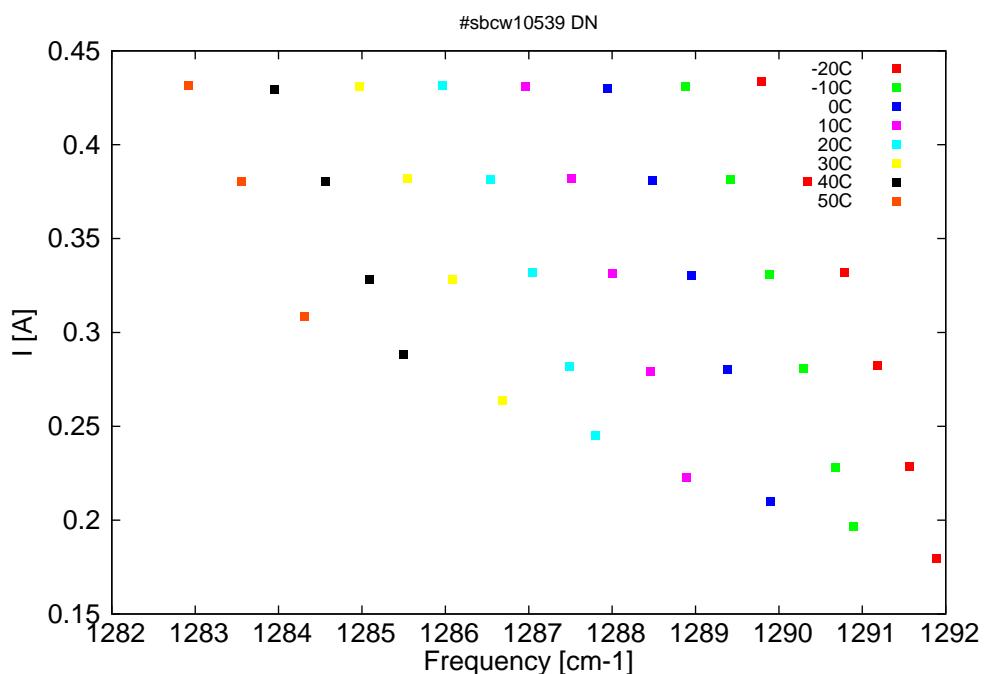


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

$\lambda$ [nm]	$\nu$ [cm $^{-1}$ ]	P[mW]	Temp[°C]	U $_{LASER}$ [V]	I[A]
7740.6	1291.9	0.7	-20	7.4	0.18
7742.5	1291.6	26.6	-20	7.6	0.23
7744.9	1291.2	57.5	-20	7.9	0.28
7747.2	1290.8	90.7	-20	8.1	0.33
7749.9	1290.3	127.8	-20	8.3	0.38
7753.2	1289.8	172.9	-20	8.5	0.43
7746.5	1290.9	0.7	-10	7.4	0.2
7747.8	1290.7	17	-10	7.6	0.23
7750.2	1290.3	47.3	-10	7.8	0.28
7752.6	1289.9	77.1	-10	8	0.33
7755.5	1289.4	114.2	-10	8.2	0.38
7758.7	1288.9	154.4	-10	8.5	0.43
7752.5	1289.9	0.8	0	7.4	0.21
7755.6	1289.4	35.7	0	7.7	0.28
7758.2	1289	65.2	0	8	0.33
7761.1	1288.5	98	0	8.2	0.38
7764.3	1287.9	136.8	0	8.4	0.43
7758.6	1288.9	0.5	10	7.4	0.22
7761.2	1288.5	25.9	10	7.7	0.28
7763.9	1288	54.6	10	7.9	0.33
7766.9	1287.5	87.5	10	8.1	0.38
7770.3	1287	121.7	10	8.4	0.43
7765.2	1287.8	0.8	20	7.5	0.25
7767.1	1287.5	16.7	20	7.7	0.28
7769.7	1287	43.7	20	7.9	0.33
7772.8	1286.5	71.1	20	8.1	0.38
7776.2	1286	105.5	20	8.3	0.43
7771.9	1286.7	1	30	7.5	0.26
7775.5	1286.1	29.3	30	7.8	0.33
7778.8	1285.5	59	30	8.1	0.38
7782.3	1285	87.7	30	8.3	0.43
7779.1	1285.5	1.1	40	7.6	0.29
7781.5	1285.1	18.8	40	7.8	0.33
7784.8	1284.6	43.3	40	8	0.38
7788.4	1284	70.2	40	8.3	0.43
7786.3	1284.3	0.5	50	7.7	0.31
7790.9	1283.6	31.6	50	8	0.38
7794.7	1282.9	55.4	50	8.2	0.43

Table 1: Singlemode optical output power as function of operating parameters.

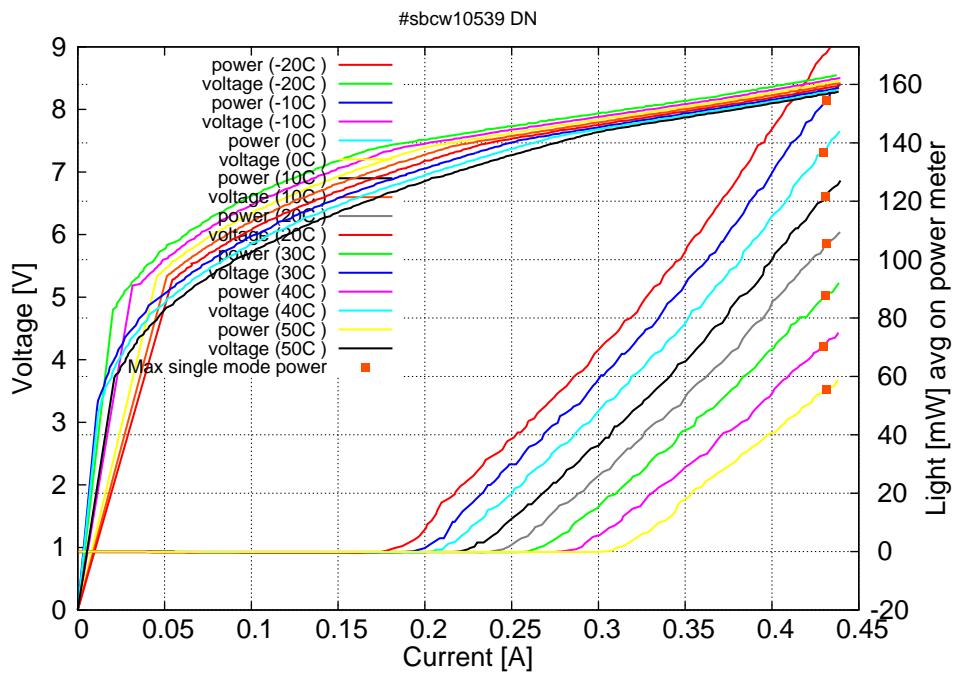


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C:  $I_{th}=0.18\text{A}$  /  $V_{th}=7.4\text{V}$  (2-wires measurements). Maximum operation current: 0.440A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

