

Datasheet for #sbcw8591 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To use with an ILX Lightwave LDX-3232 laser driver, or equivalent.

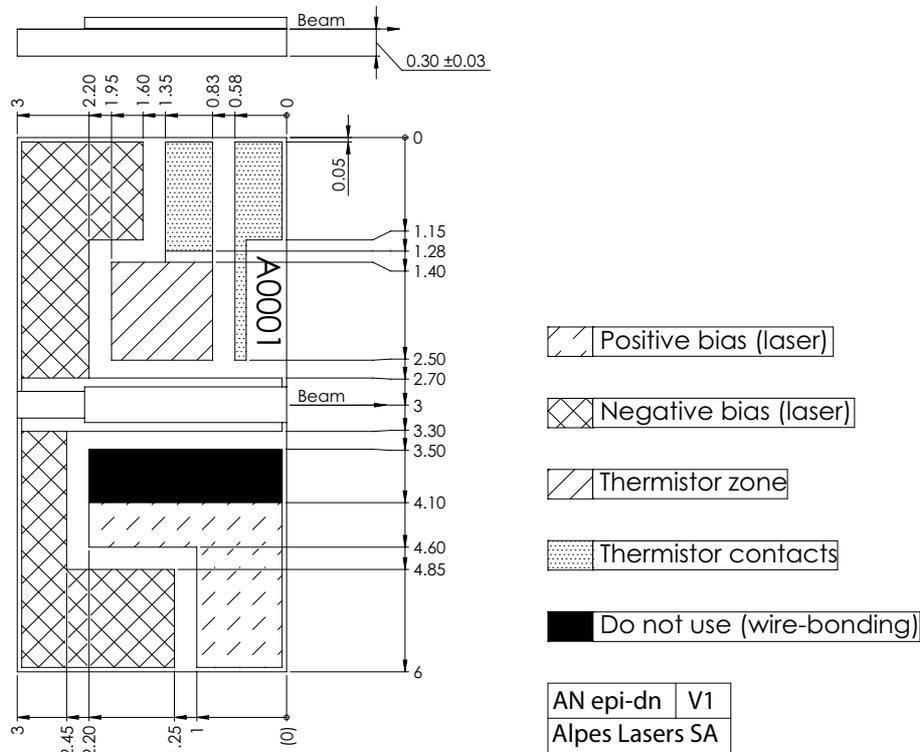


Figure 1: Support mounting for #sbcw8591 DN (please note that AlN submount numbering is A004C)

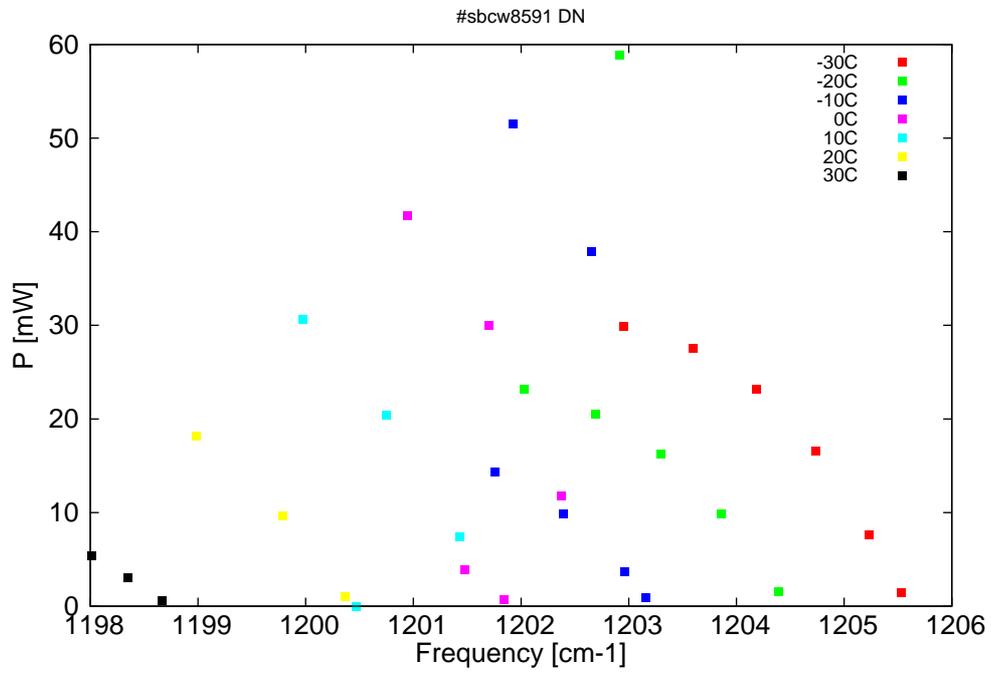


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

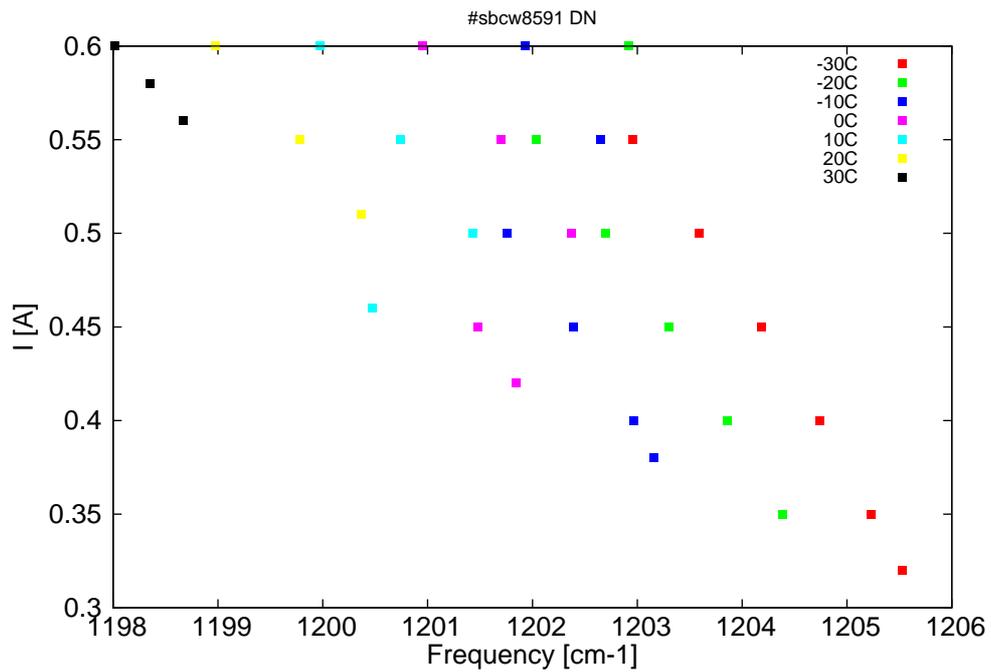


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
8295.1	1205.5	1.5	-30	8.6	0.32
8297.1	1205.2	7.6	-30	8.8	0.35
8300.6	1204.7	16.6	-30	9.1	0.4
8304.3	1204.2	23.2	-30	9.4	0.45
8308.4	1203.6	27.5	-30	9.7	0.5
8312.9	1203	29.9	-30	10	0.55
8303	1204.4	1.6	-20	8.7	0.35
8306.6	1203.9	9.9	-20	9	0.4
8310.5	1203.3	16.3	-20	9.3	0.45
8314.7	1202.7	20.6	-20	9.6	0.5
8319.2	1202	23.2	-20	9.9	0.55
8313.1	1202.9	58.8	-20	10.1	0.6
8311.4	1203.2	0.9	-10	8.8	0.38
8312.8	1203	3.7	-10	8.9	0.4
8316.8	1202.4	9.9	-10	9.2	0.45
8321.1	1201.8	14.3	-10	9.5	0.5
8314.9	1202.7	37.9	-10	9.8	0.55
8320	1201.9	51.5	-10	10.1	0.6
8320.6	1201.8	0.7	0	9	0.42
8323.1	1201.5	3.9	0	9.2	0.45
8316.9	1202.4	11.8	0	9.4	0.5
8321.5	1201.7	30	0	9.7	0.55
8326.8	1200.9	41.7	0	10	0.6
8330.1	1200.5	0	10	9.2	0.46
8323.4	1201.4	7.4	10	9.4	0.5
8328.2	1200.7	20.4	10	9.6	0.55
8333.5	1200	30.6	10	9.9	0.6
8330.8	1200.4	1	20	9.4	0.51
8334.8	1199.8	9.7	20	9.6	0.55
8340.4	1199	18.2	20	9.9	0.6
8342.6	1198.7	0.6	30	9.5	0.56
8344.8	1198.4	3.1	30	9.6	0.58
8347.1	1198	5.4	30	9.8	0.6

Table 1 : singlemode optical output power as function of operating parameters

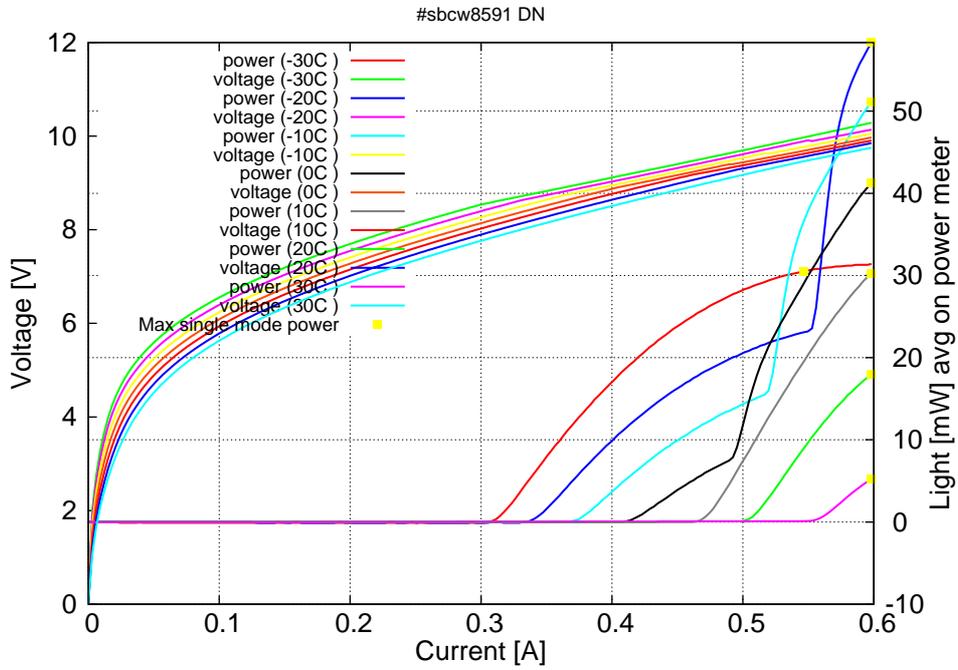
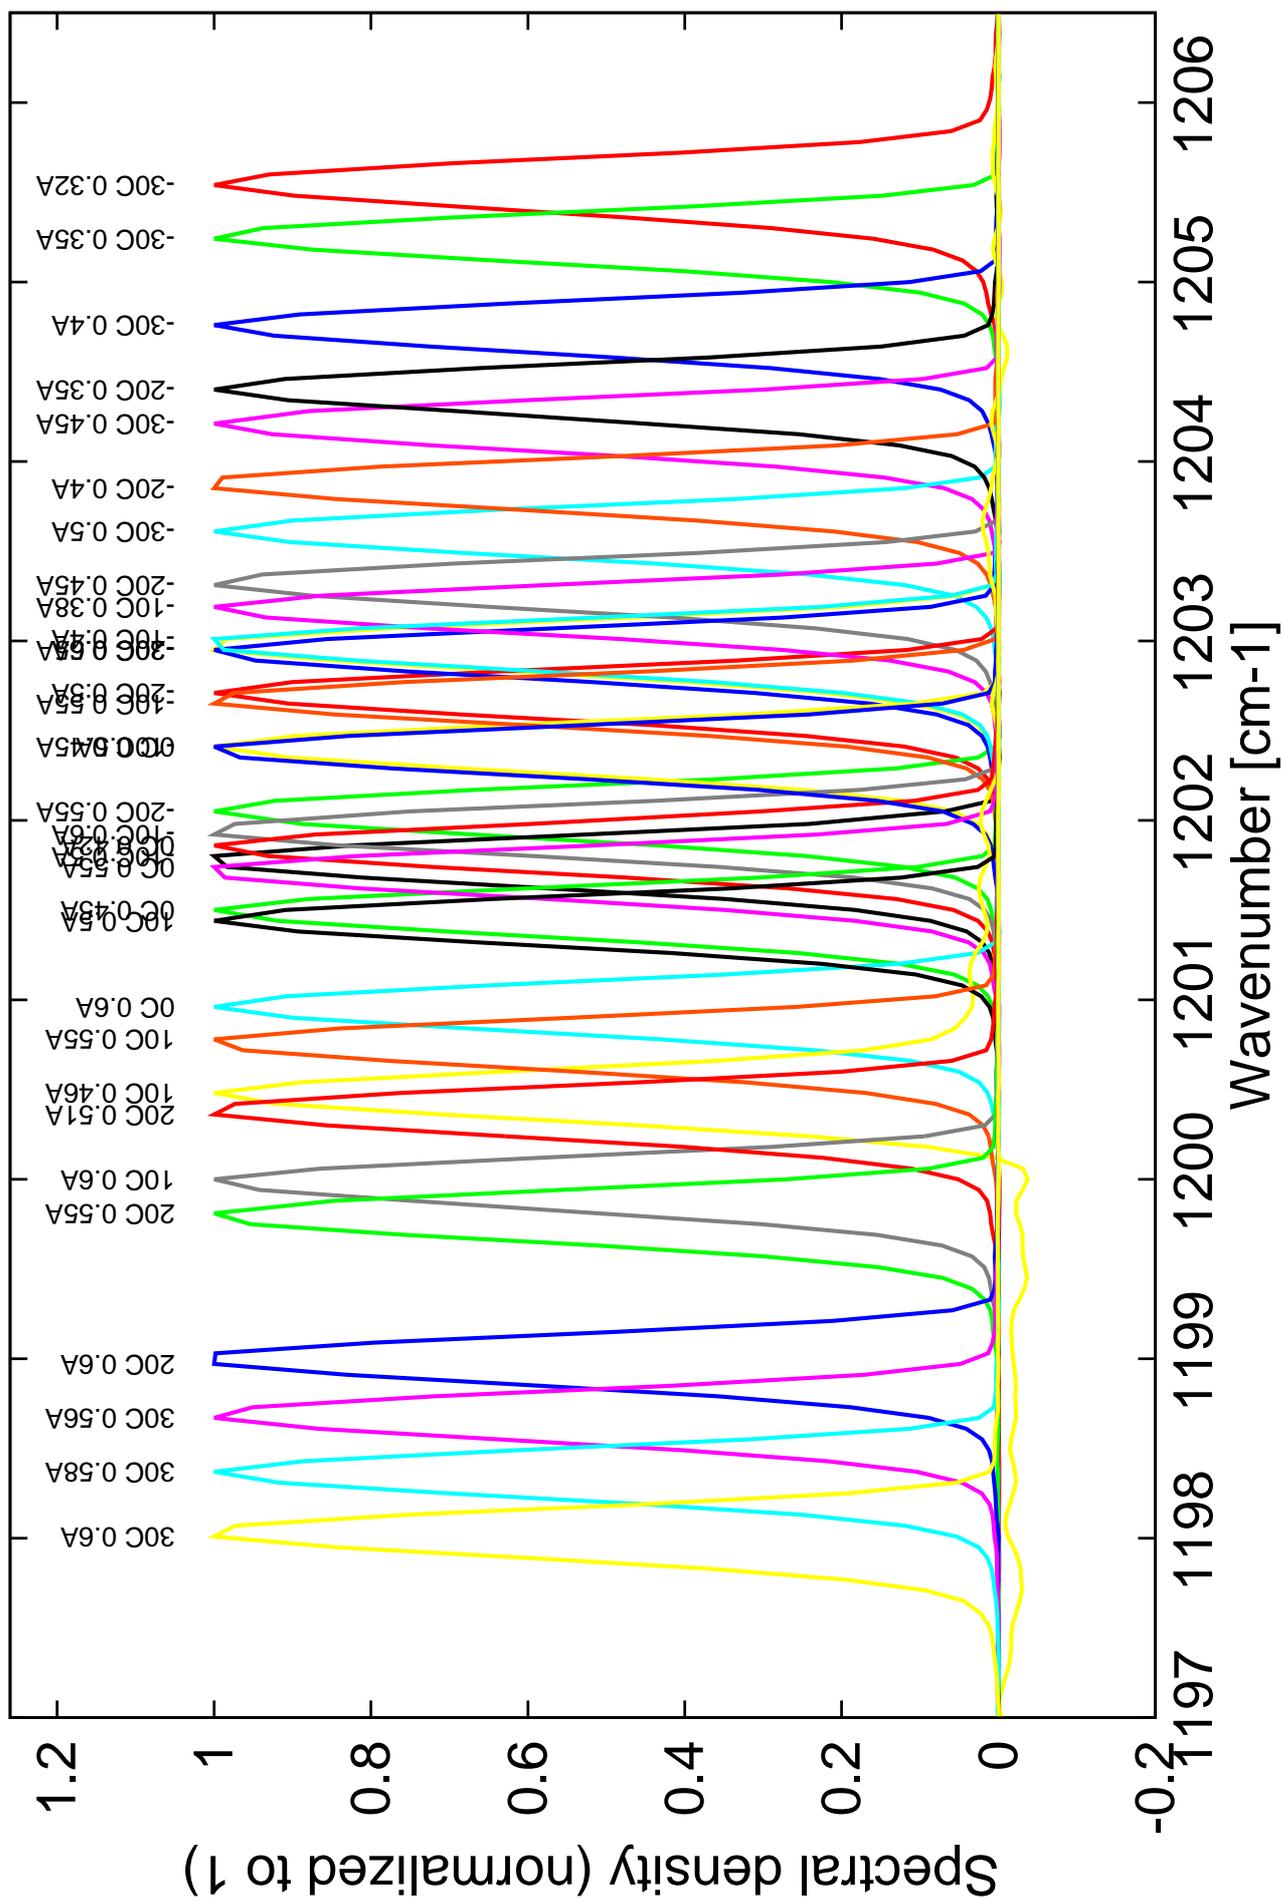


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -30C: $I_{th}=0.30A$ / $V_{th}=8.5V$ (2-wires measurements). Maximum operation current: 0.55A at -30C, 0.6A between -20C and 30C.

Figure 3: spectra at different temperatures for various DC currents



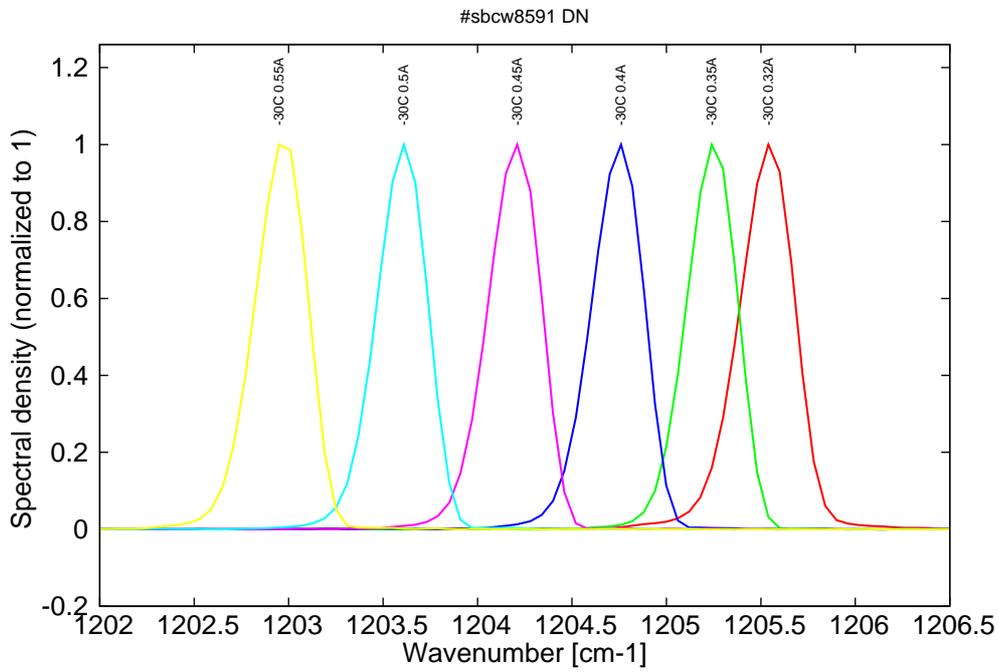


Figure 5: spectra at -30C for various DC currents (monomode on mode 1 up to 0.55A)

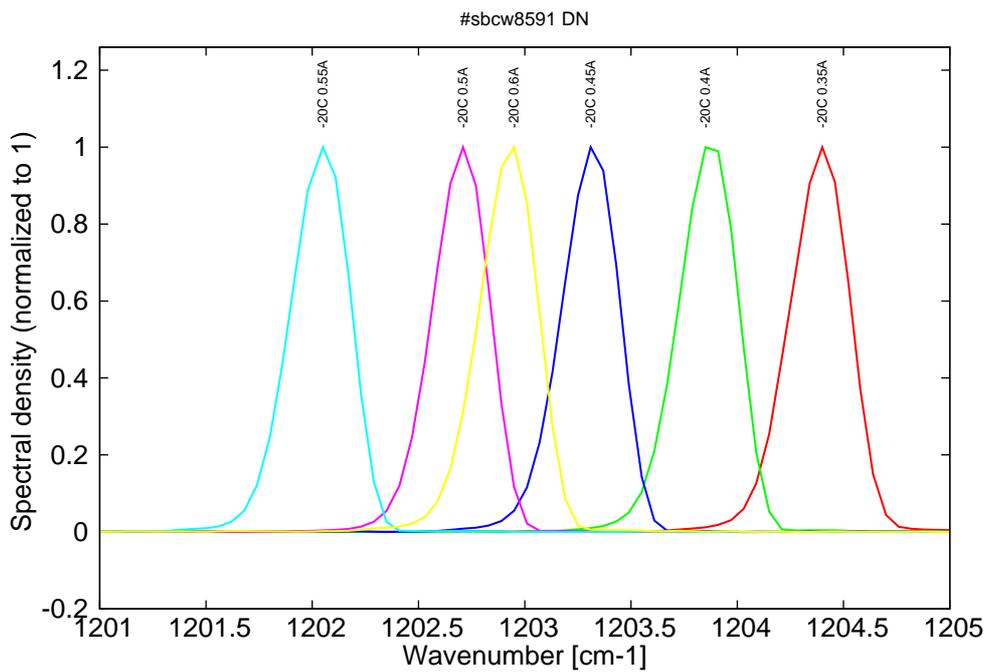


Figure 6: spectra at -20C for various DC currents (monomode on mode 1 up to 0.55A, then becomes monomode on mode 2, see Fig. 2 & 3)

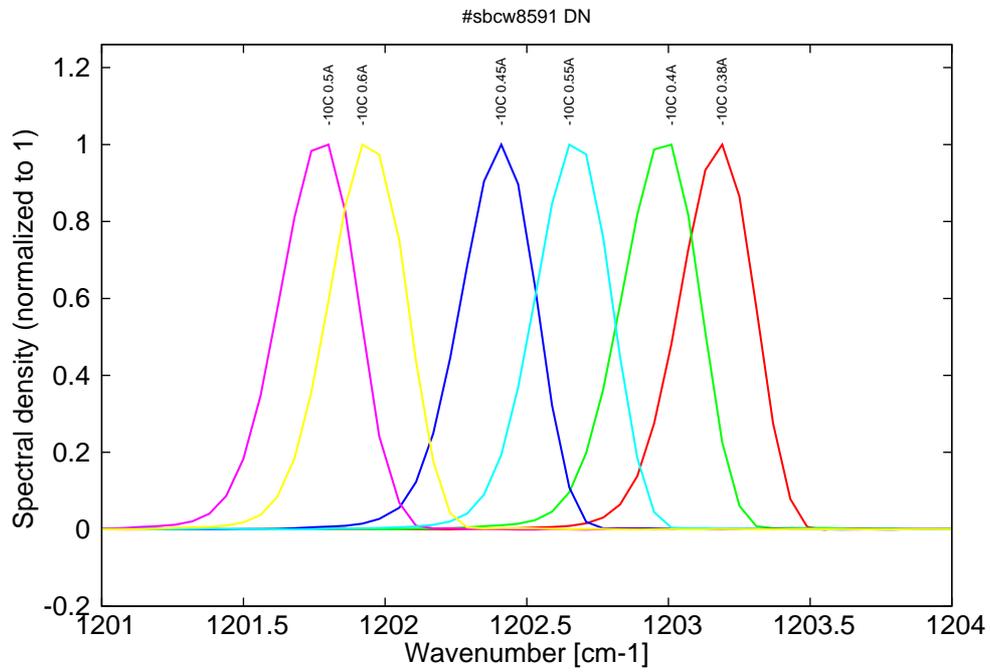


Figure 7: spectra at -10C for various DC currents (monomode on mode 1 up to 0.5A, then becomes monomode on mode 2, see Fig. 2 & 3)

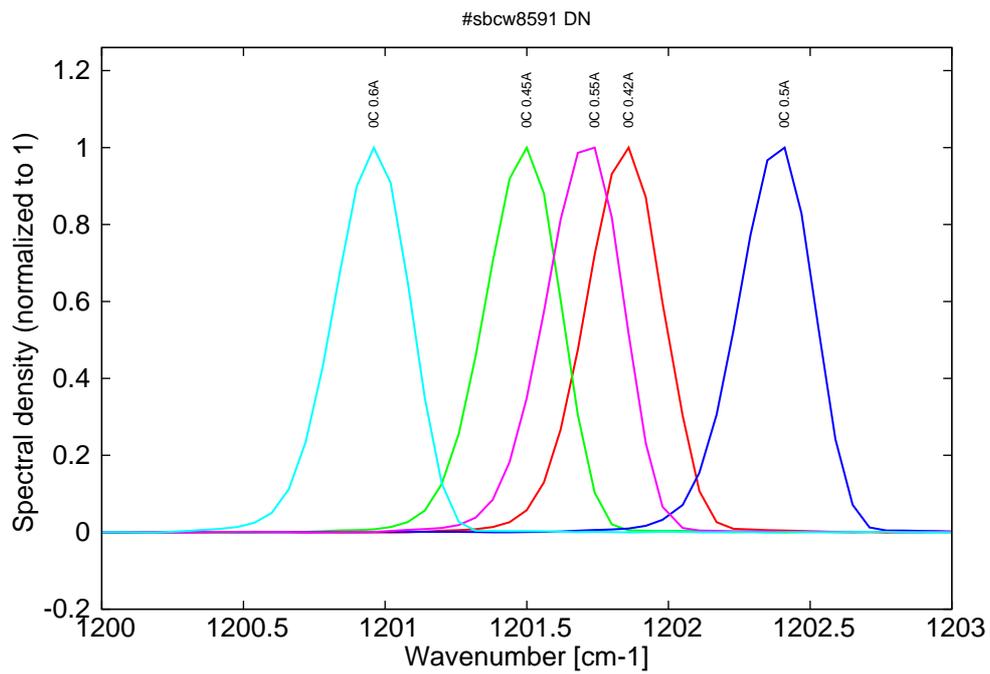


Figure 8: spectra at 0C for various DC currents (monomode on mode 1 up to 0.45A, then becomes monomode on mode 2, see Fig. 2 & 3)

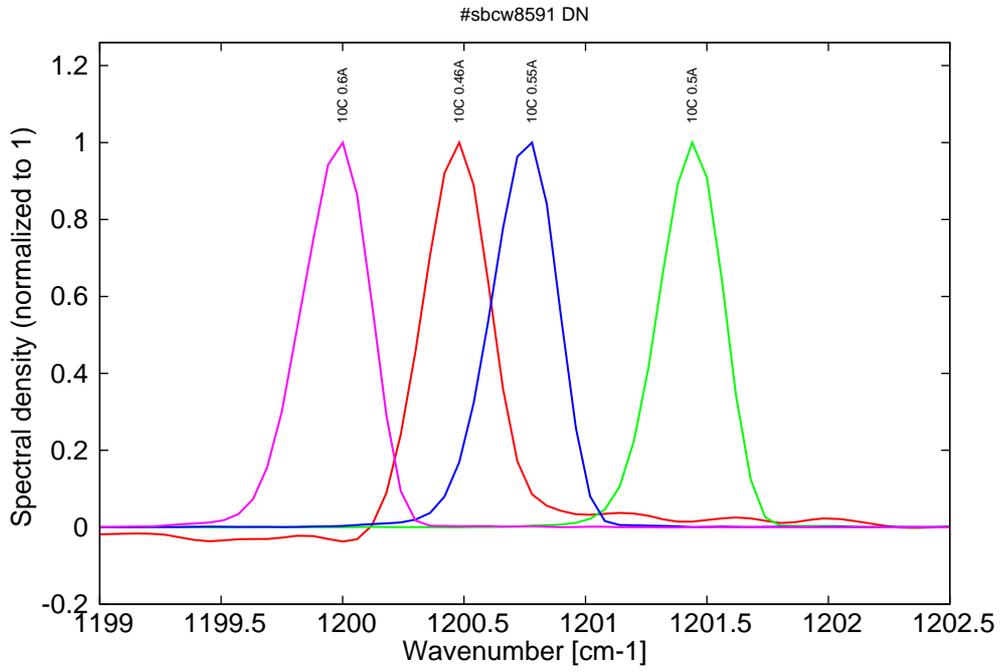


Figure 9: spectra at 10C for various DC currents (monomode on mode 1 up to 0.45A, then becomes monomode on mode 2, see Fig. 2 & 3)

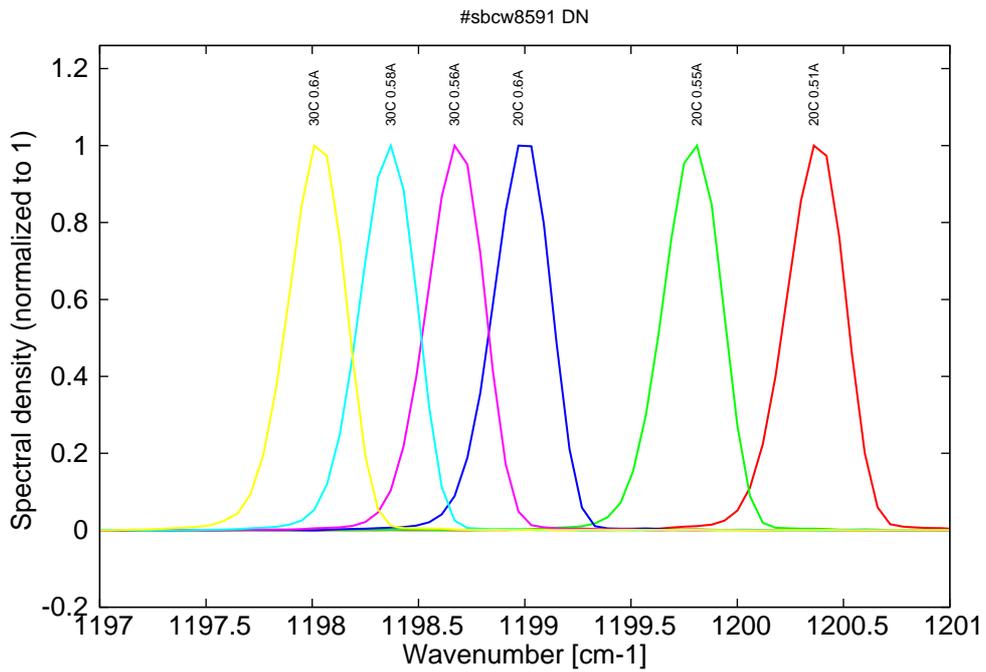


Figure 10: spectra between 20C and 30C for various DC currents (all monomode on mode 2, see Fig. 2 & 3)