

Datasheet for #sbcw19173 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <https://www.alpeslasers.ch/resources/#faq>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.

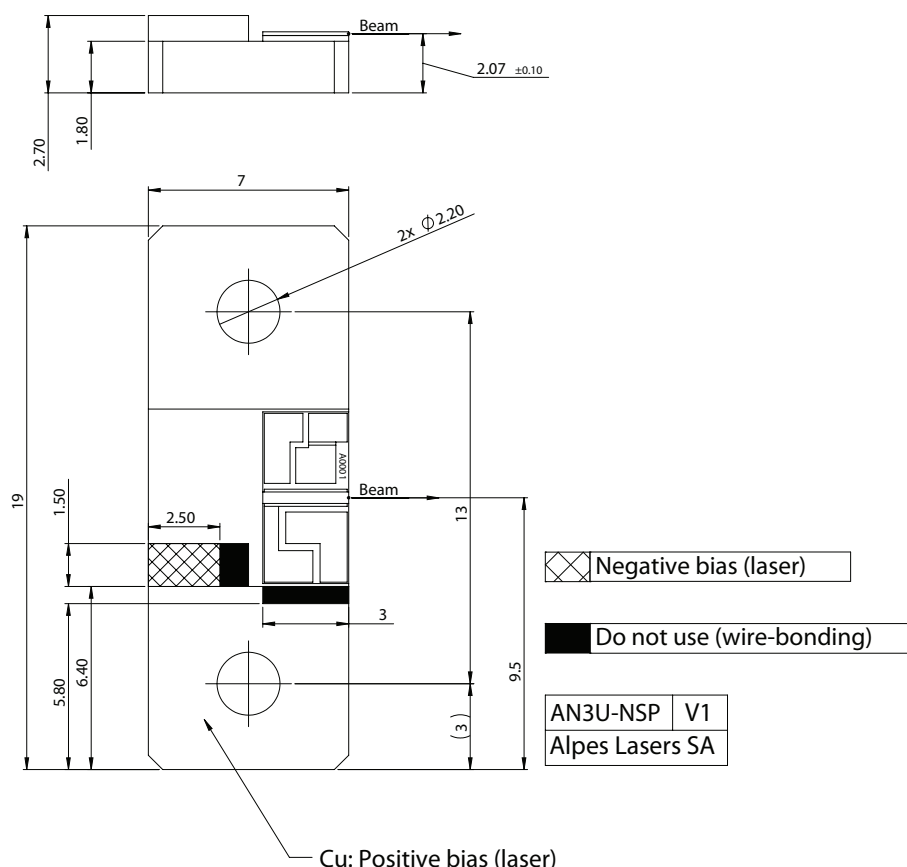


Figure 1: Mechanical and electrical interface for #sbcw19173 DN

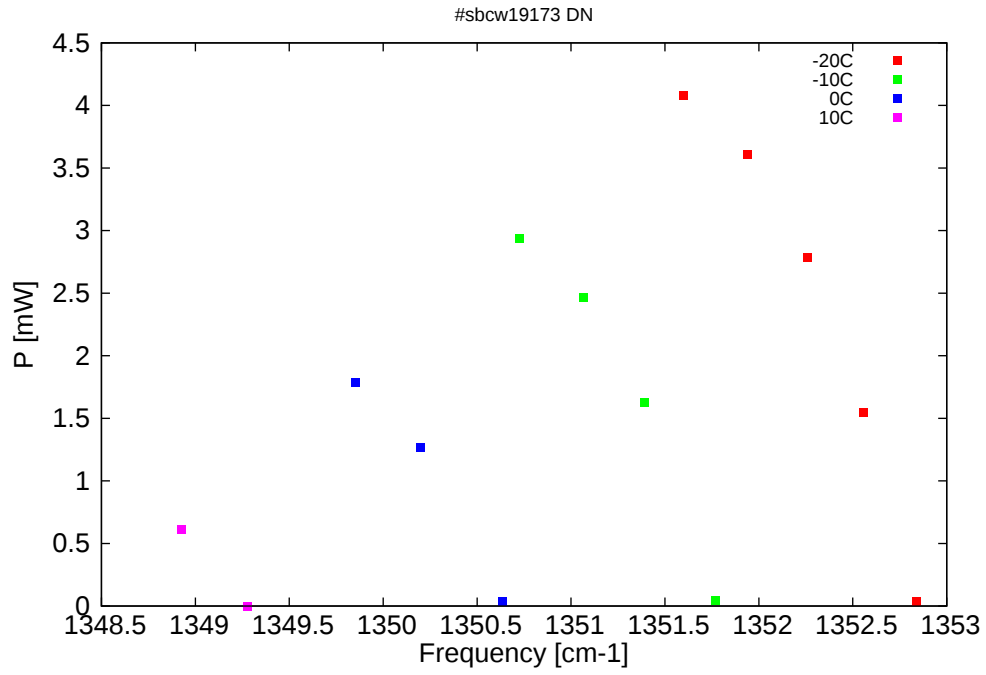


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

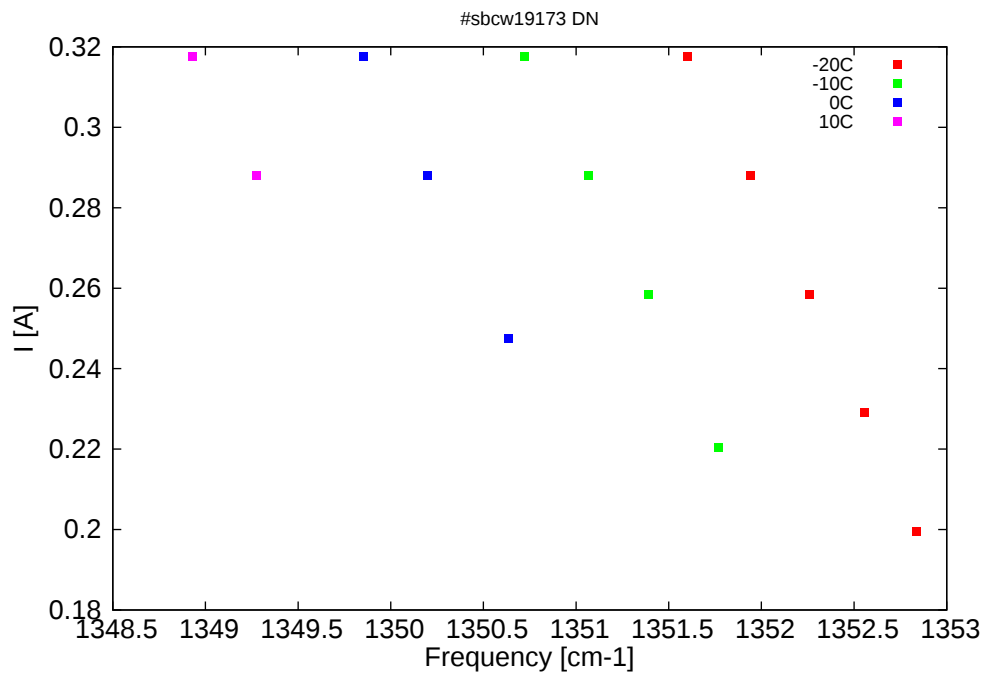


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

$\lambda[\text{nm}]$	$\nu[\text{cm}^{-1}]$	P[mW]	Temp[°C]	$U_{LASER}[\text{V}]$	I[A]
7391.9	1352.8	0	-20	9.37	0.199
7393.4	1352.6	1.6	-20	9.68	0.229
7395	1352.3	2.8	-20	9.99	0.259
7396.8	1351.9	3.6	-20	10.29	0.288
7398.6	1351.6	4.1	-20	10.61	0.318
7397.7	1351.8	0	-10	9.46	0.22
7399.8	1351.4	1.6	-10	9.85	0.259
7401.6	1351.1	2.5	-10	10.15	0.288
7403.4	1350.7	2.9	-10	10.46	0.318
7403.9	1350.6	0	0	9.59	0.247
7406.3	1350.2	1.3	0	9.99	0.288
7408.2	1349.9	1.8	0	10.29	0.318
7411.4	1349.3	0	10	9.88	0.288
7413.3	1348.9	0.6	10	10.17	0.318

Table 1: Singlemode optical output power as function of operating parameters.

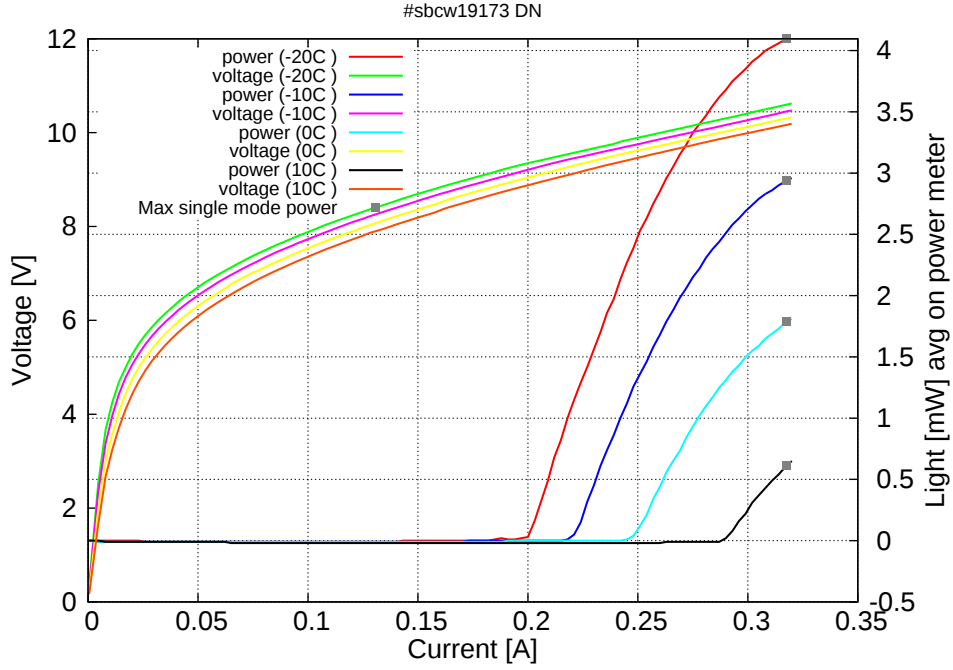


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.20\text{A}$ / $V_{th}=9.3\text{V}$ (2-wires measurements). Maximum operation current: 0.320A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

