

## Datasheet for #sbcw23033 DN

### Recommendations:

Please read the User Manual and have a look at the FAQ at  
<http://www.alpeslasers.ch/?a=142>

**WARNING:** Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

**WARNING:** Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw23033 DN (please note that AlN submount numbering is A0MLM)

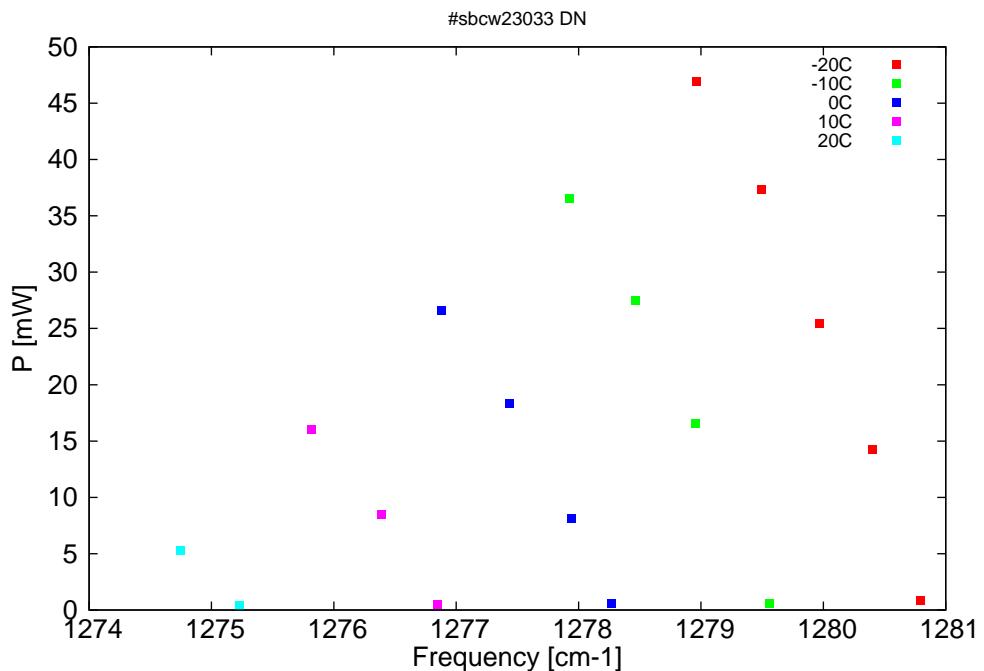


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

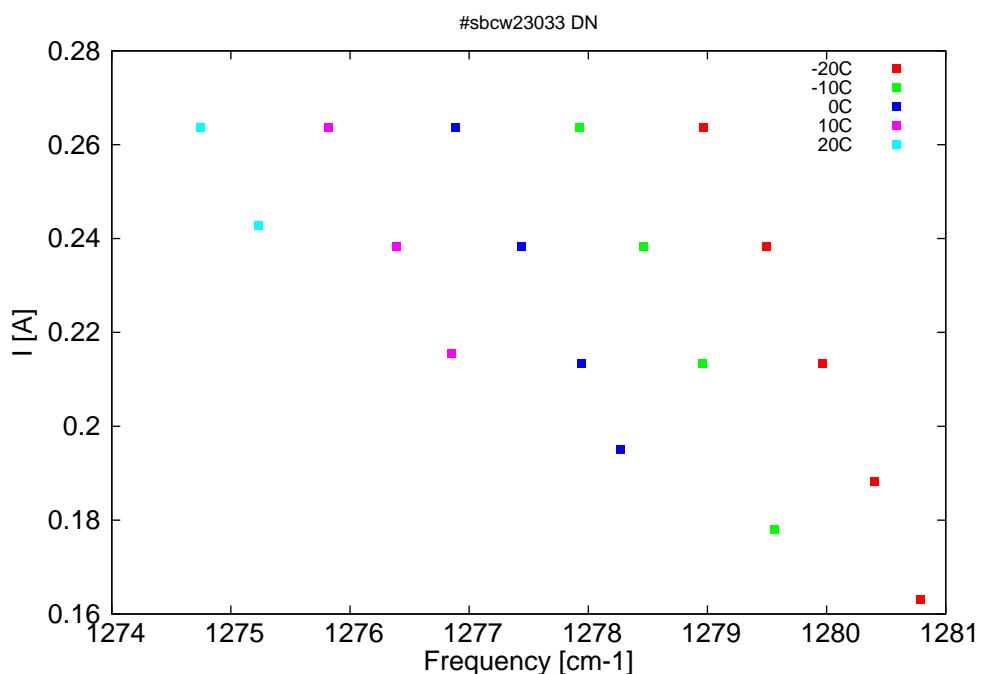


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

$\lambda$ [nm]	$\nu$ [cm $^{-1}$ ]	P[mW]	Temp[°C]	$U_{LASER}$ [V]	I[A]
7807.7	1280.8	0.8	-20	9.3	0.163
7810.1	1280.4	14.3	-20	9.54	0.188
7812.7	1280	25.4	-20	9.77	0.213
7815.6	1279.5	37.3	-20	10	0.238
7818.8	1279	47	-20	10.22	0.264
7815.2	1279.6	0.6	-10	9.28	0.178
7818.9	1279	16.6	-10	9.6	0.213
7821.9	1278.5	27.5	-10	9.83	0.238
7825.2	1277.9	36.5	-10	10.05	0.264
7823.1	1278.3	0.6	0	9.27	0.195
7825.1	1277.9	8.1	0	9.44	0.213
7828.2	1277.4	18.3	0	9.67	0.238
7831.6	1276.9	26.6	0	9.9	0.264
7831.8	1276.9	0.5	10	9.31	0.216
7834.6	1276.4	8.5	10	9.51	0.238
7838.1	1275.8	16	10	9.74	0.264
7841.7	1275.2	0.4	20	9.4	0.243
7844.7	1274.7	5.3	20	9.59	0.264

Table 1: Singlemode optical output power as function of operating parameters.

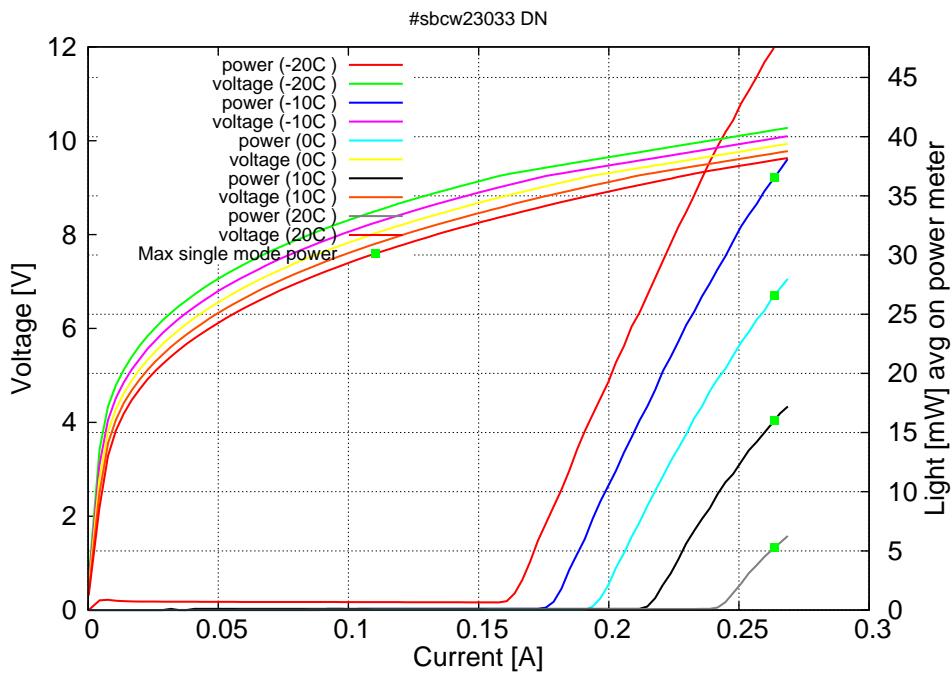


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C:  $I_{th}=0.16A$  /  $V_{th}=9.3V$  (2-wires measurements). Maximum operation current: 0.27A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

