

Datasheet for #sbcw12578 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw12578 DN (please note that AlN submount numbering is A05JZ)

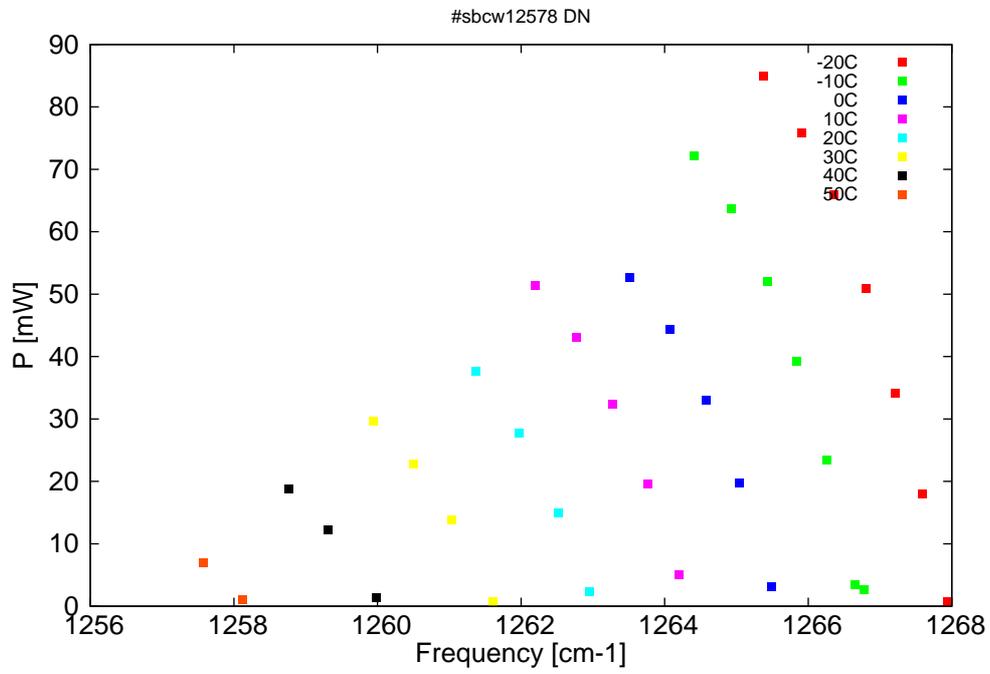


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

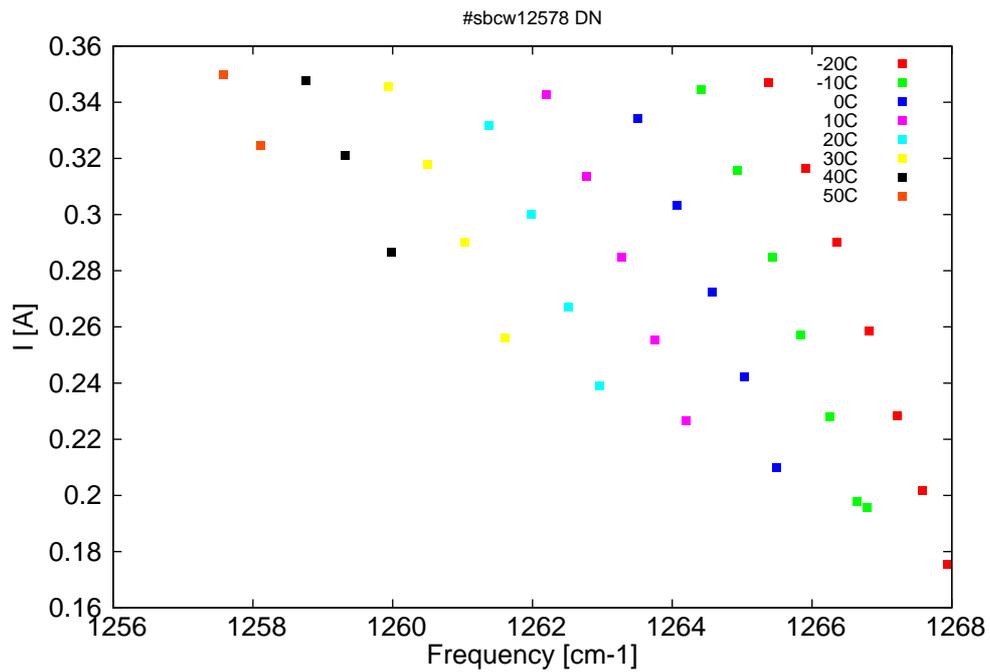


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
7886.8	1267.9	0.8	-20	7.89	0.176
7889	1267.6	17.9	-20	8.1	0.202
7891.3	1267.2	34.2	-20	8.3	0.228
7893.8	1266.8	50.9	-20	8.52	0.259
7896.7	1266.4	65.9	-20	8.73	0.29
7899.5	1265.9	75.9	-20	8.94	0.317
7902.8	1265.4	84.9	-20	9.16	0.347
7894	1266.8	2.6	-10	7.88	0.196
7894.9	1266.6	3.5	-10	7.98	0.198
7897.3	1266.3	23.4	-10	8.19	0.228
7899.9	1265.8	39.2	-10	8.41	0.257
7902.5	1265.4	52	-10	8.61	0.285
7905.6	1264.9	63.6	-10	8.82	0.316
7908.8	1264.4	72.1	-10	9.03	0.344
7902.1	1265.5	3.1	0	8	0.21
7904.9	1265	19.8	0	8.22	0.242
7907.8	1264.6	33.1	0	8.43	0.272
7911	1264.1	44.4	0	8.65	0.303
7914.4	1263.5	52.6	0	8.88	0.334
7910.1	1264.2	5.1	10	8.1	0.227
7912.9	1263.8	19.6	10	8.3	0.255
7915.9	1263.3	32.4	10	8.51	0.285
7919.1	1262.8	43	10	8.71	0.314
7922.7	1262.2	51.3	10	8.94	0.343
7917.9	1263	2.4	20	8.11	0.239
7920.7	1262.5	15	20	8.31	0.267
7924.1	1262	27.8	20	8.53	0.3
7927.9	1261.4	37.7	20	8.76	0.332
7926.4	1261.6	0.8	30	8.21	0.256
7930	1261	13.8	30	8.45	0.29
7933.4	1260.5	22.8	30	8.65	0.318
7936.9	1259.9	29.7	30	8.85	0.345
7936.6	1260	1.4	40	8.38	0.287
7940.8	1259.3	12.2	40	8.63	0.321
7944.3	1258.8	18.7	40	8.82	0.348
7948.4	1258.1	1.1	50	8.61	0.325
7951.8	1257.6	6.9	50	8.79	0.35

Table 1: Singlemode optical output power as function of operating parameters.

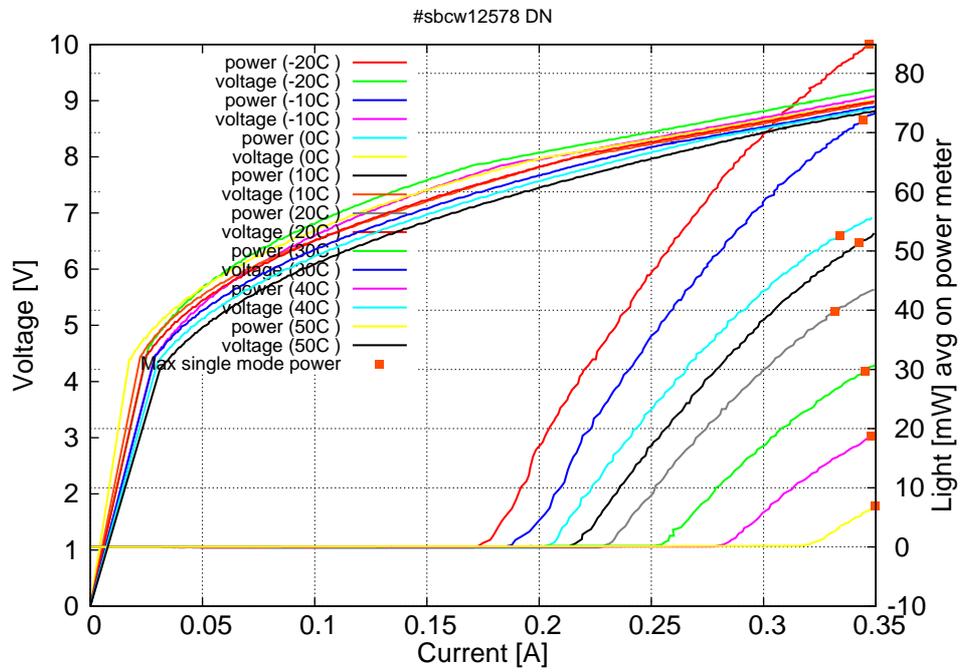


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.17A$ / $V_{th}=7.9V$ (2-wires measurements). Maximum operation current: 0.350A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

