

## Datasheet for #sbcw12950 DN

### Recommendations:

Please read the User Manual and have a look at the FAQ at  
<http://www.alpeslasers.ch/?a=142>

**WARNING:** Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

**WARNING:** Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To use with an ILX Lightwave LDX-3232 laser driver, or equivalent.



Figure 1: Mechanical and electrical interface for #sbcw12950 DN (please note that AlN submount numbering is A0820)

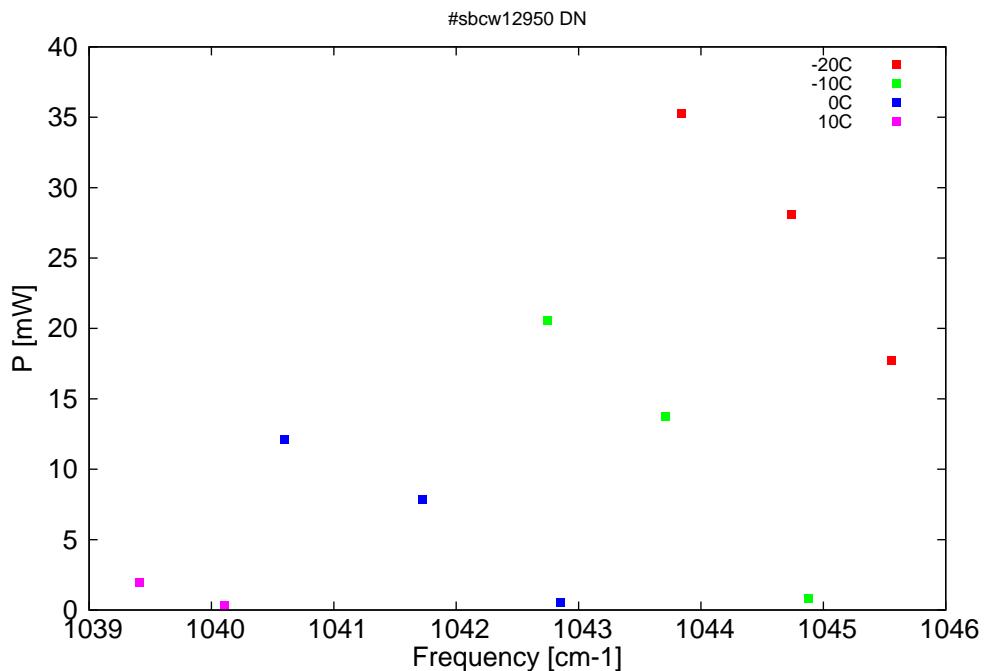


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

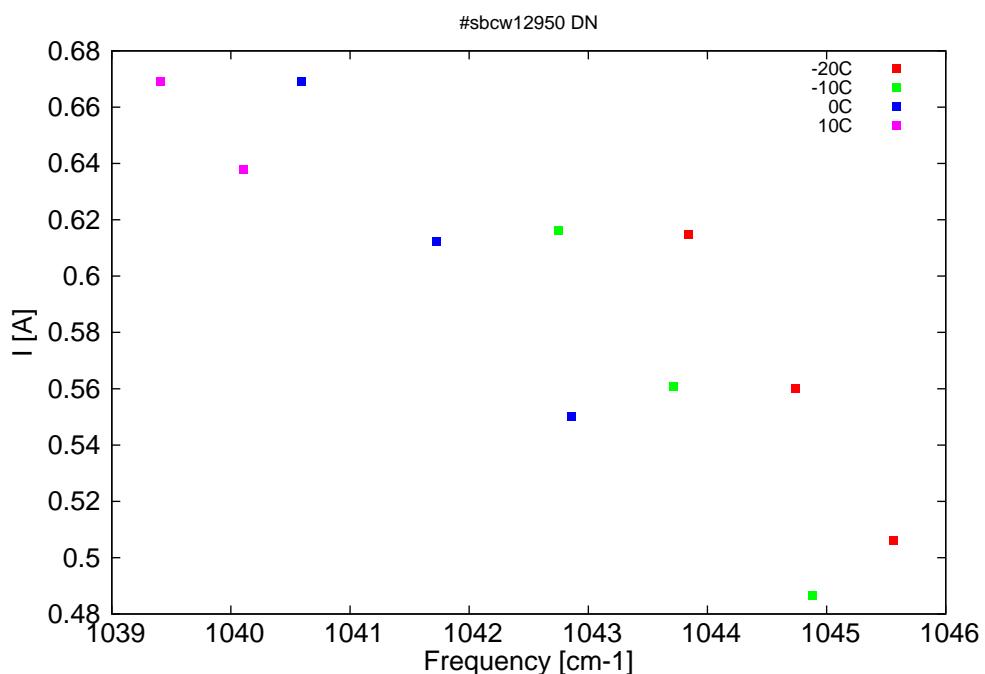


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

$\lambda$ [nm]	$\nu$ [cm $^{-1}$ ]	P[mW]	Temp[°C]	$U_{LASER}$ [V]	I[A]
9564.3	1045.6	17.7	-20	9.6	0.51
9571.7	1044.7	28.1	-20	9.9	0.56
9580	1043.8	35.3	-20	10.2	0.61
9570.5	1044.9	0.8	-10	9.4	0.49
9581.2	1043.7	13.7	-10	9.8	0.56
9590	1042.8	20.6	-10	10.1	0.62
9589.1	1042.9	0.5	0	9.6	0.55
9599.5	1041.7	7.9	0	10	0.61
9609.9	1040.6	12.1	0	10.3	0.67
9614.4	1040.1	0.3	10	10.1	0.64
9620.8	1039.4	1.9	10	10.3	0.67

Table 1: Singlemode optical output power as function of operating parameters.

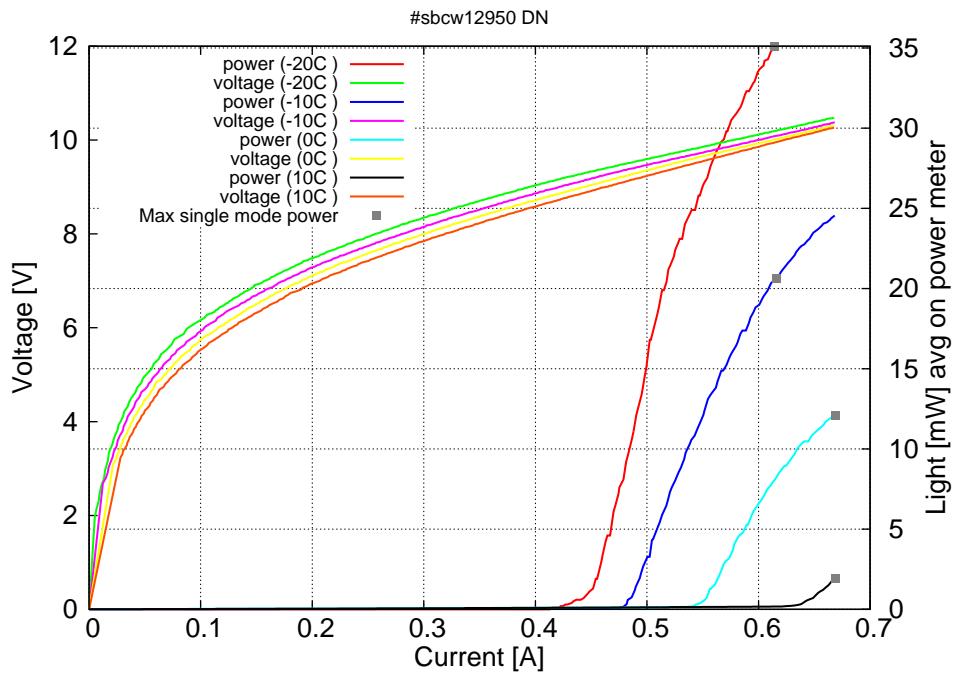


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

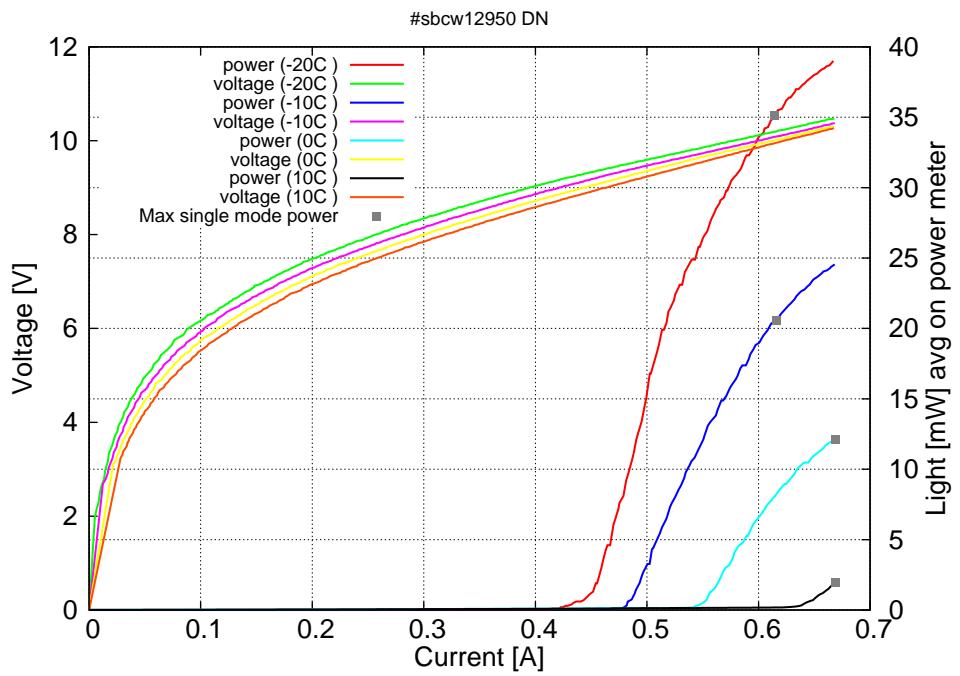
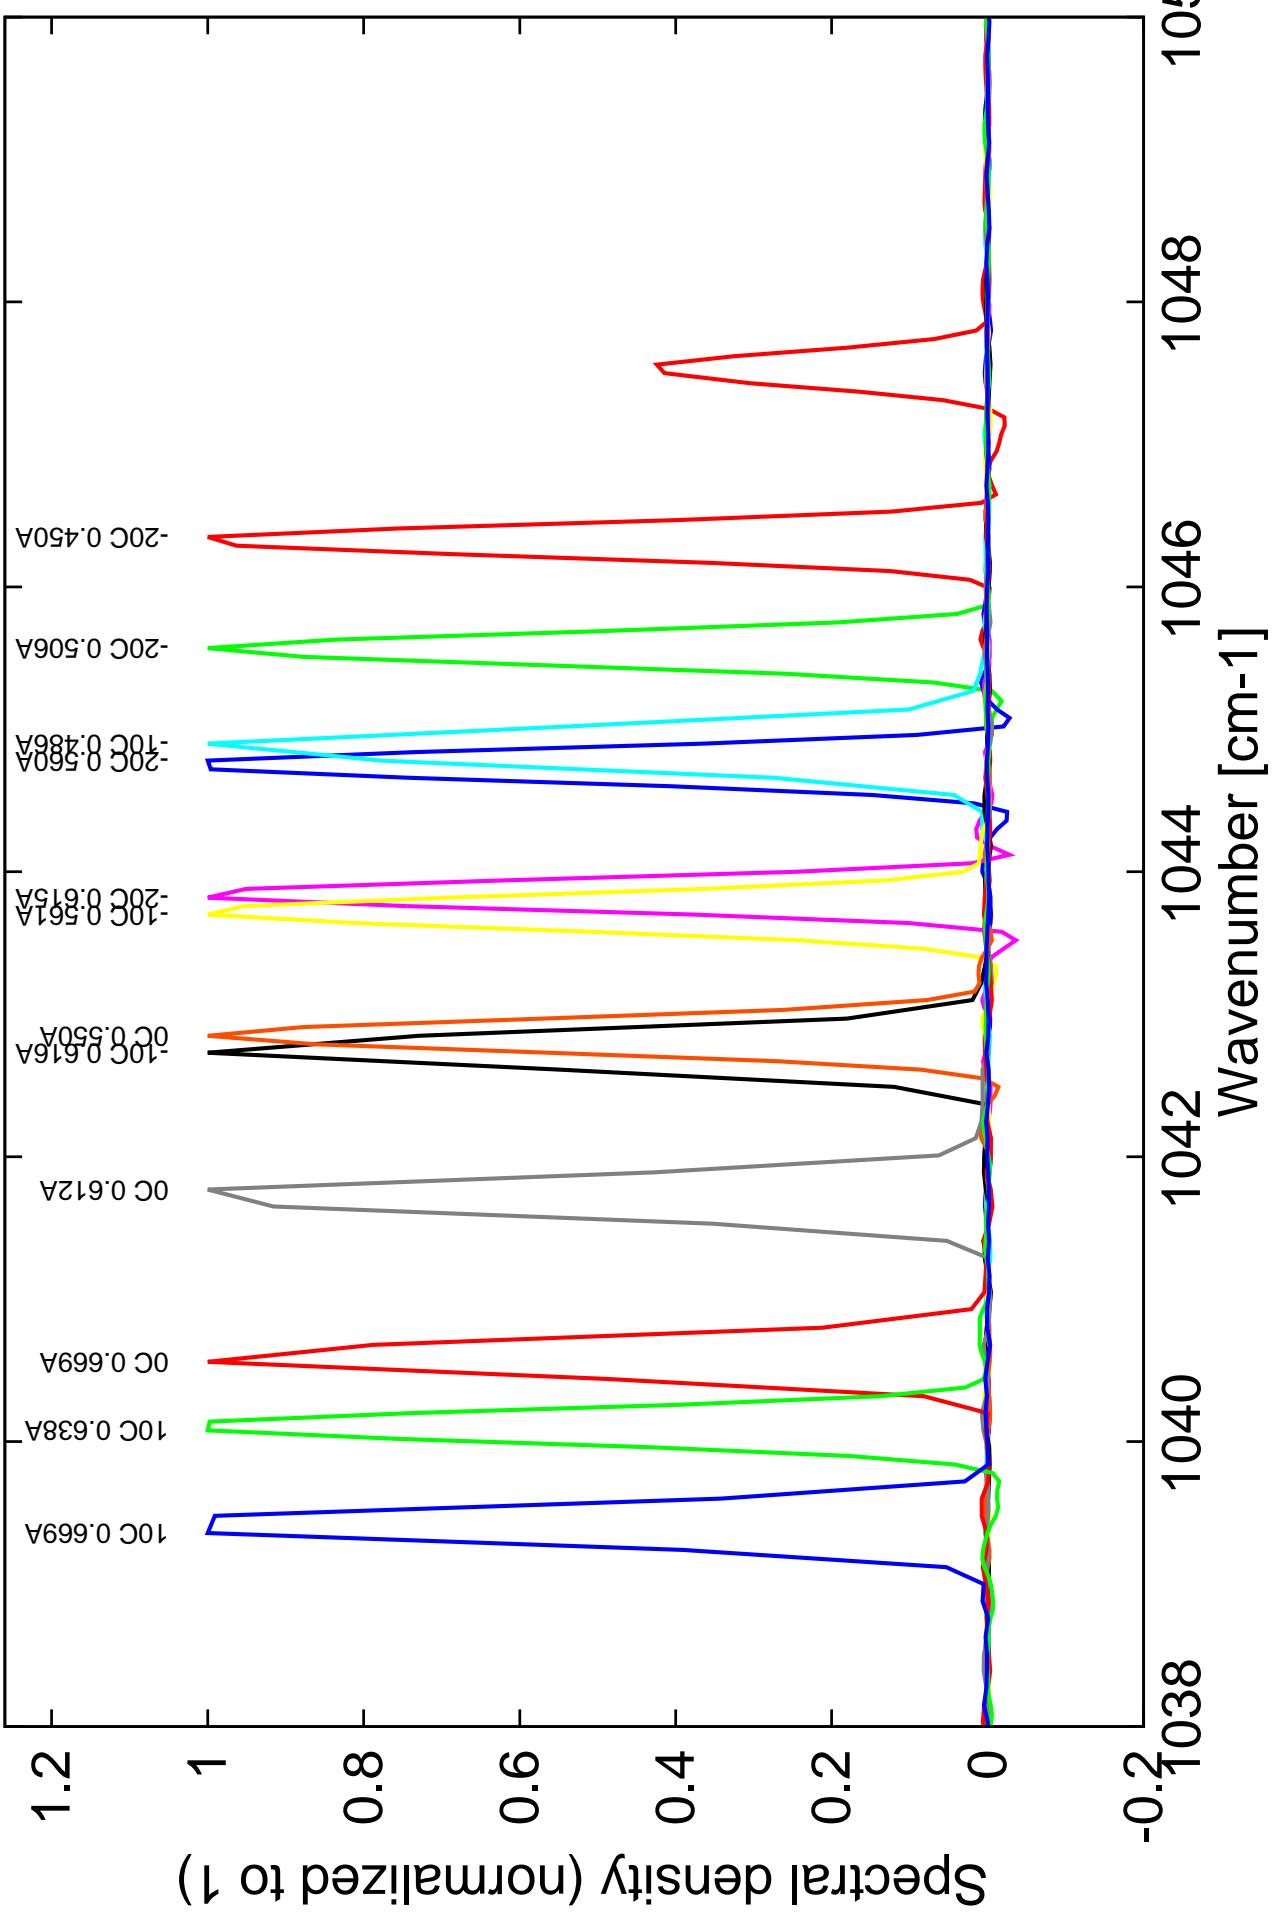


Figure 5: voltage and avg power vs current in continuous-wave operation (including the multimode region)

Note: at -20C:  $I_{th}=0.43A$  /  $V_{th}=9.55V$  (2-wires measurements). Maximum operation current: 0.62A at -20C and -10C, 0.67A at 0C and 10C.

Figure 4: spectra at different temperatures for various DC currents



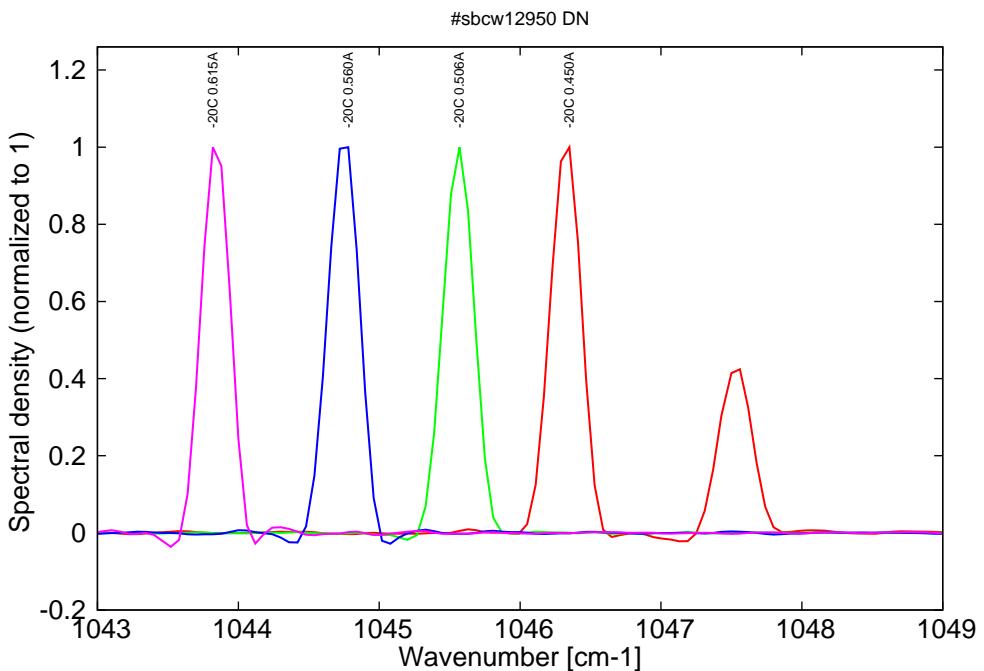


Figure 6: spectra at -20C for various DC currents (bimode at threshold, then becomes monomode)

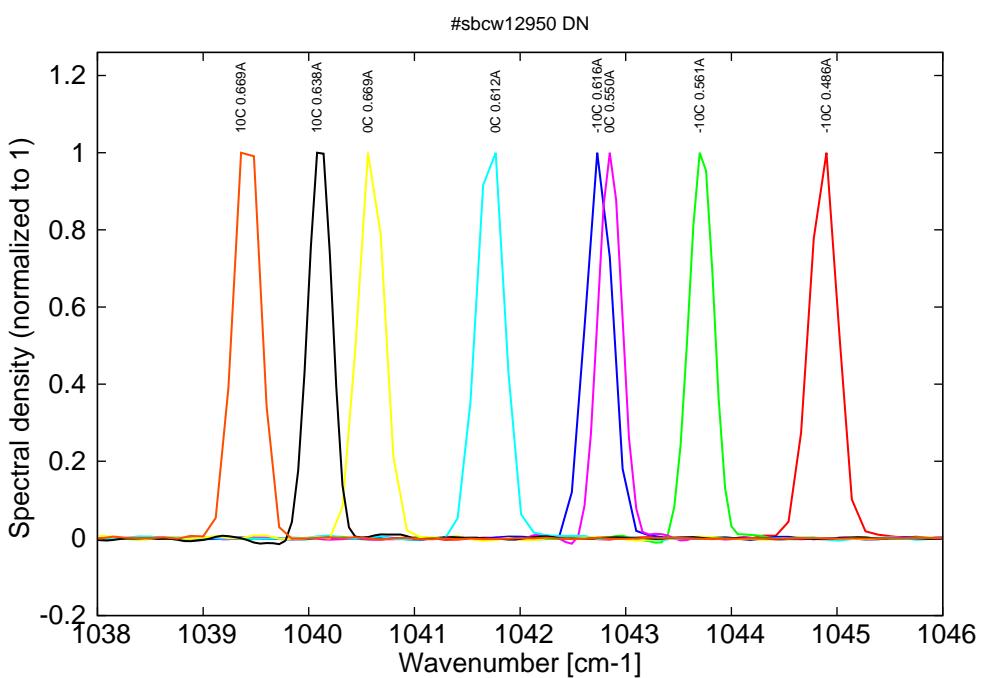


Figure 7: spectra between -10C and 10C for various DC currents (all monomode)