

Datasheet for #sbcw13815 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.

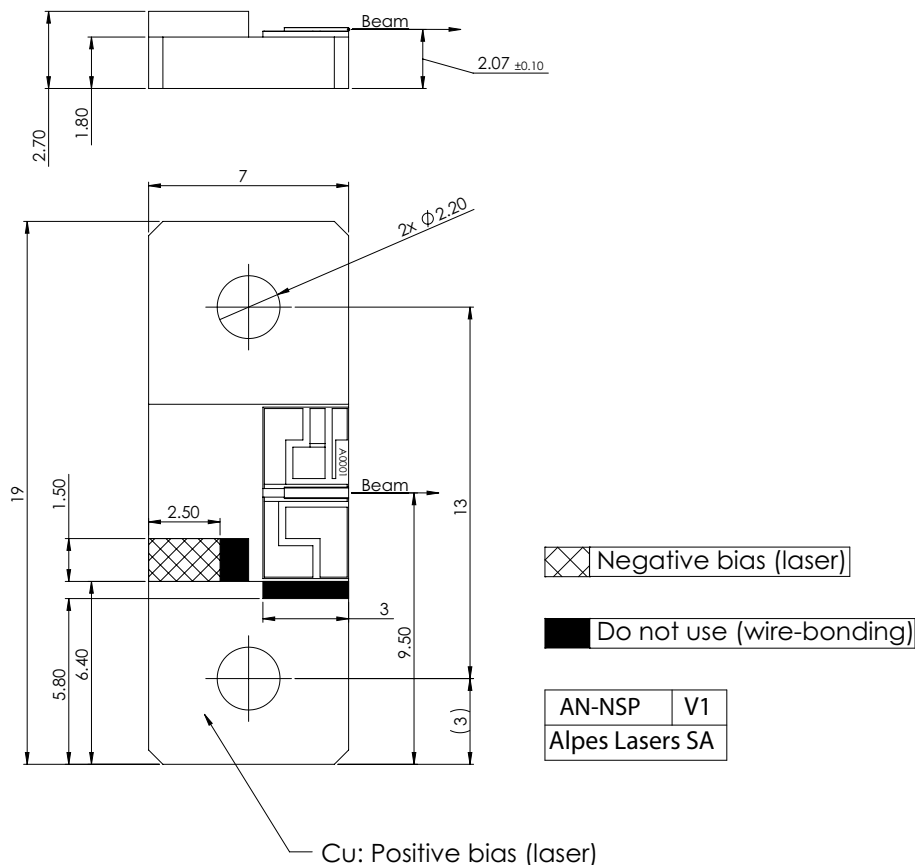


Figure 1: Mechanical and electrical interface for #sbcw13815 DN

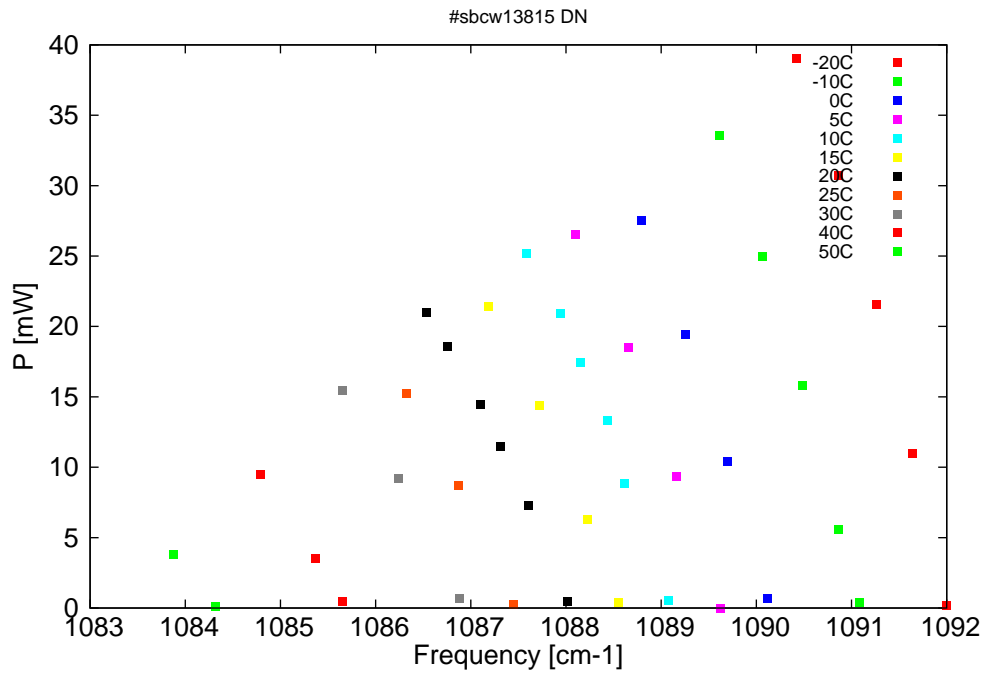


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

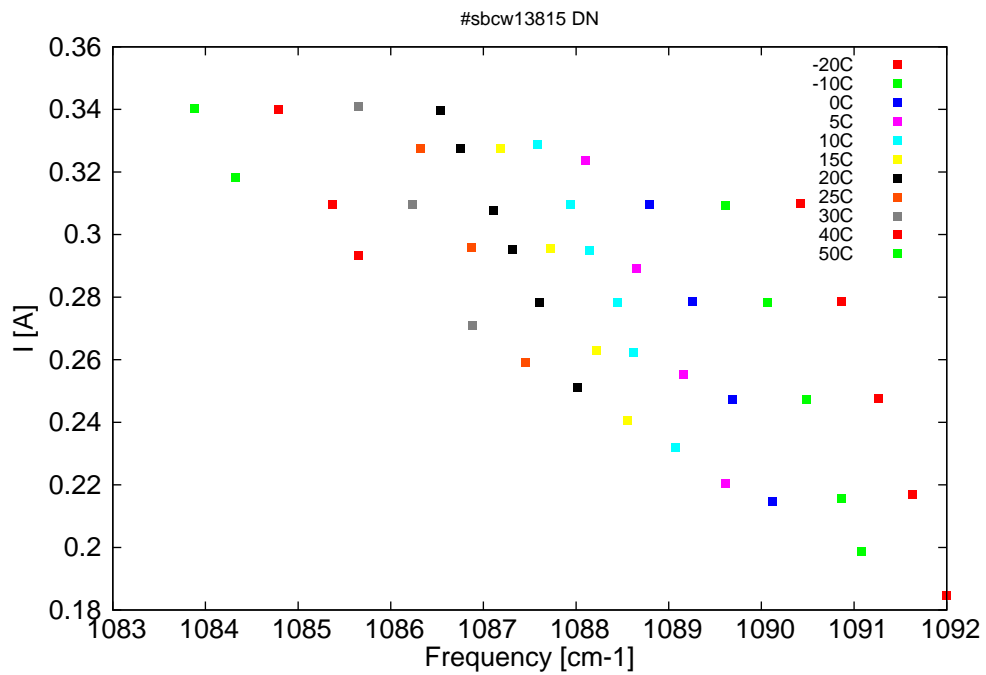


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
9157.6	1092	0.2	-20	9.5	0.18
9160.6	1091.6	11	-20	9.8	0.22
9163.7	1091.3	21.6	-20	10.2	0.25
9167.1	1090.9	30.7	-20	10.5	0.28
9170.8	1090.4	39	-20	10.8	0.31
9165.2	1091.1	0.4	-10	9.6	0.2
9167	1090.9	5.6	-10	9.8	0.22
9170.2	1090.5	15.8	-10	10.1	0.25
9173.8	1090.1	25	-10	10.4	0.28
9177.6	1089.6	33.6	-10	10.8	0.31
9173.3	1090.1	0.7	0	9.7	0.21
9176.9	1089.7	10.4	0	10.1	0.25
9180.6	1089.3	19.5	0	10.4	0.28
9184.5	1088.8	27.5	0	10.7	0.31
9177.5	1089.6	0	5	9.7	0.22
9181.4	1089.2	9.3	5	10.1	0.26
9185.6	1088.7	18.5	5	10.5	0.29
9190.3	1088.1	26.6	5	10.9	0.32
9182.1	1089.1	0.6	10	9.8	0.23
9186	1088.6	8.8	10	10.2	0.26
9187.5	1088.4	13.3	10	10.3	0.28
9189.9	1088.1	17.5	10	10.5	0.29
9191.6	1087.9	21	10	10.7	0.31
9194.7	1087.6	25.2	10	10.9	0.33
9186.5	1088.6	0.4	15	9.9	0.24
9189.3	1088.2	6.3	15	10.2	0.26
9193.5	1087.7	14.4	15	10.5	0.3
9198	1087.2	21.4	15	10.9	0.33
9191	1088	0.5	20	10	0.25
9194.5	1087.6	7.3	20	10.3	0.28
9197	1087.3	11.5	20	10.5	0.3
9198.7	1087.1	14.4	20	10.6	0.31
9201.7	1086.8	18.6	20	10.8	0.33
9203.6	1086.5	21	20	11	0.34
9195.8	1087.5	0.2	25	10.1	0.26
9200.7	1086.9	8.7	25	10.5	0.3
9205.4	1086.3	15.3	25	10.8	0.33
9200.6	1086.9	0.7	30	10.2	0.27
9206.1	1086.2	9.2	30	10.6	0.31
9211	1085.7	15.4	30	11	0.34
9211.1	1085.7	0.5	40	10.4	0.29
9213.4	1085.4	3.6	40	10.6	0.31
9218.4	1084.8	9.5	40	10.9	0.34
9222.4	1084.3	0.1	50	10.6	0.32
9226.1	1083.9	3.8	50	10.9	0.34

Table 1: Singlemode optical output power as function of operating parameters.

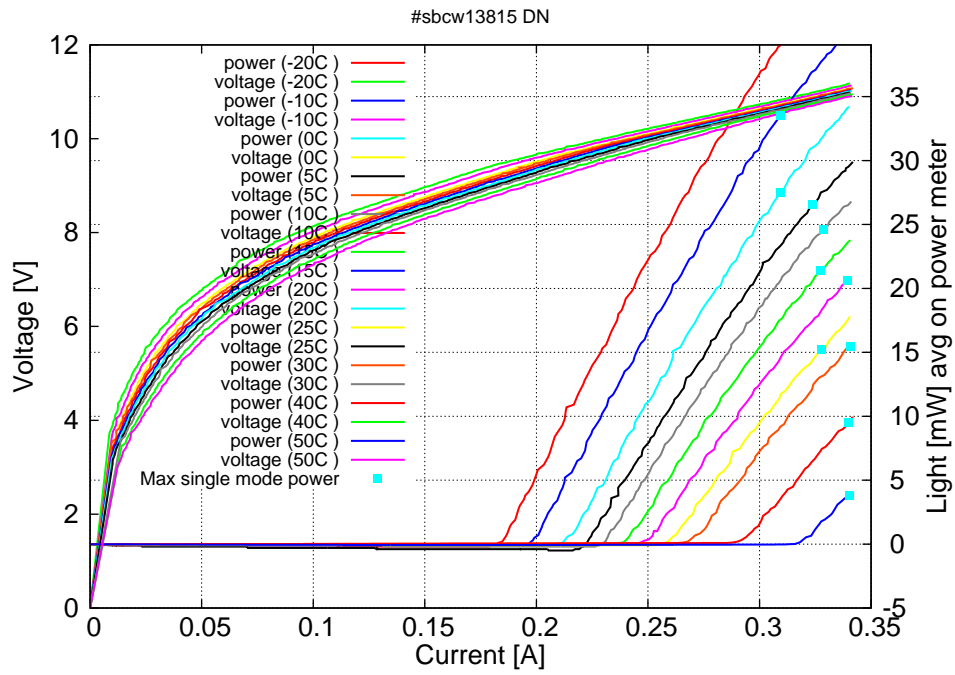


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.18A$ / $V_{th}=9.4V$ (2-wires measurements). Maximum operation current: 0.31A between -20C and 0C, 0.33A between 5C and 15C, 0.34A between 20C and 50C.

