

Datasheet for #sbcw14223 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.

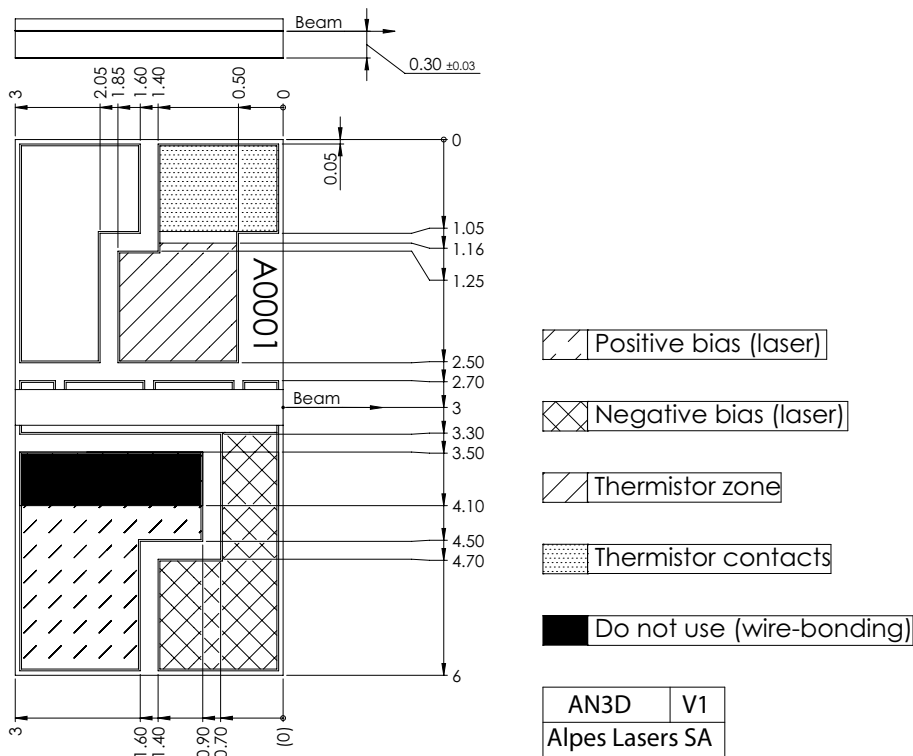


Figure 1: Mechanical and electrical interface for #sbcw14223 DN (please note that AlN submount numbering is P0342)

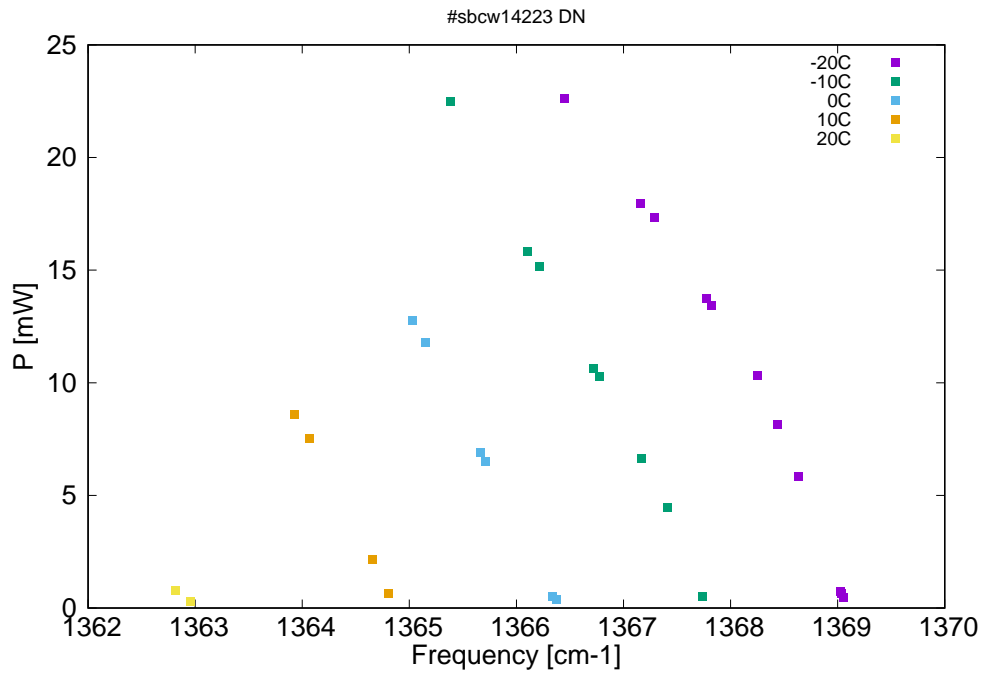


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

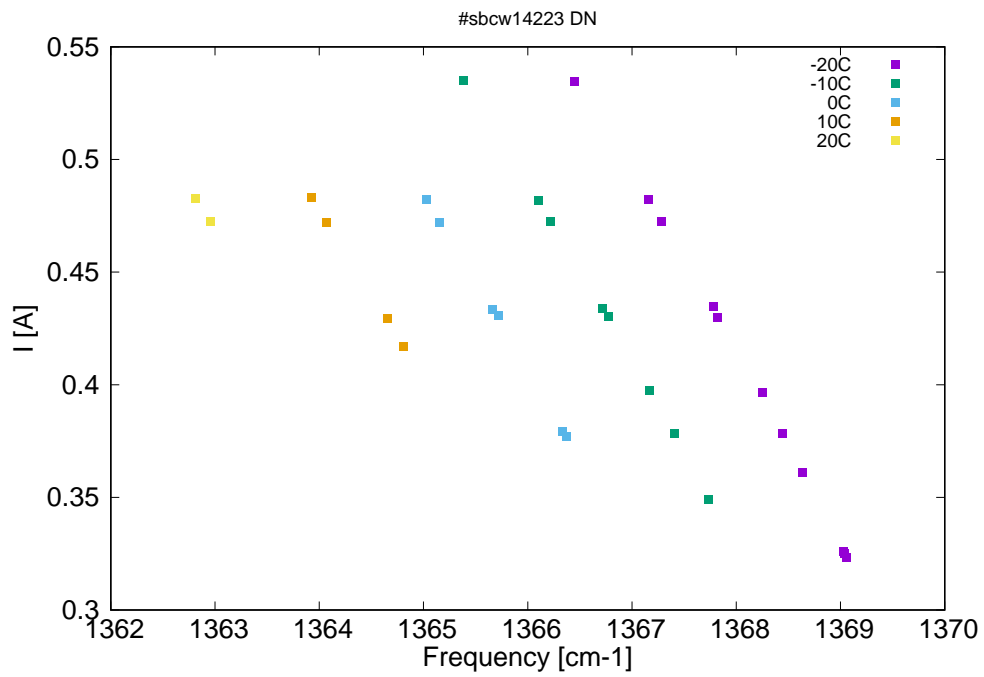


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
7304.3	1369.1	0.5	-20	9	0.32
7304.4	1369	0.6	-20	9	0.33
7304.5	1369	0.7	-20	9	0.33
7306.5	1368.6	5.8	-20	9.2	0.36
7307.6	1368.4	8.1	-20	9.3	0.38
7308.6	1368.2	10.3	-20	9.4	0.4
7310.9	1367.8	13.4	-20	9.6	0.43
7311.1	1367.8	13.8	-20	9.6	0.43
7313.8	1367.3	17.3	-20	9.9	0.47
7314.5	1367.2	18	-20	9.9	0.48
7318.2	1366.5	22.6	-20	10.2	0.53
7311.3	1367.7	0.5	-10	9.1	0.35
7313.1	1367.4	4.4	-10	9.3	0.38
7314.4	1367.2	6.7	-10	9.4	0.4
7316.5	1366.8	10.3	-10	9.6	0.43
7316.8	1366.7	10.6	-10	9.6	0.43
7319.5	1366.2	15.2	-10	9.8	0.47
7320.1	1366.1	15.8	-10	9.9	0.48
7323.9	1365.4	22.5	-10	10.2	0.53
7318.7	1366.4	0.4	0	9.2	0.38
7318.8	1366.3	0.5	0	9.2	0.38
7322.2	1365.7	6.5	0	9.5	0.43
7322.5	1365.7	6.9	0	9.5	0.43
7325.2	1365.2	11.8	0	9.7	0.47
7325.9	1365	12.8	0	9.8	0.48
7327.1	1364.8	0.7	10	9.3	0.42
7327.9	1364.7	2.2	10	9.4	0.43
7331	1364.1	7.5	10	9.7	0.47
7331.8	1363.9	8.6	10	9.7	0.48
7337	1363	0.3	20	9.6	0.47
7337.8	1362.8	0.8	20	9.7	0.48

Table 1: Singlemode optical output power as function of operating parameters.

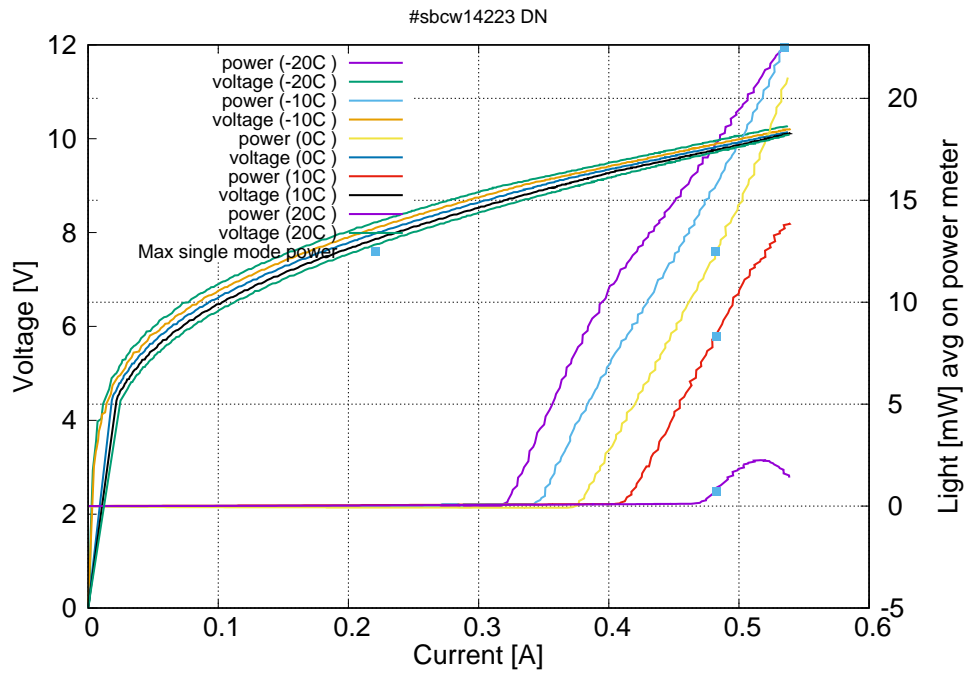


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.32A$ / $V_{th}=9.0V$ (2-wires measurements). Maximum operation current: 0.540A at -20C and -10C, 0.48A at 0C, 10C and 20C.

Figure 3: spectra at different temperatures for various DC currents

