

Datasheet for #sbcw1659 UP

Recommendations:

Please read the starter kit user manual (at least installation chapter 5), if available, and have a look at the FAQ at <http://www.alpeslasers.ch/alphaq.pdf>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To use with a power-supply ILX Lightwave LDX-3232 or equivalent.

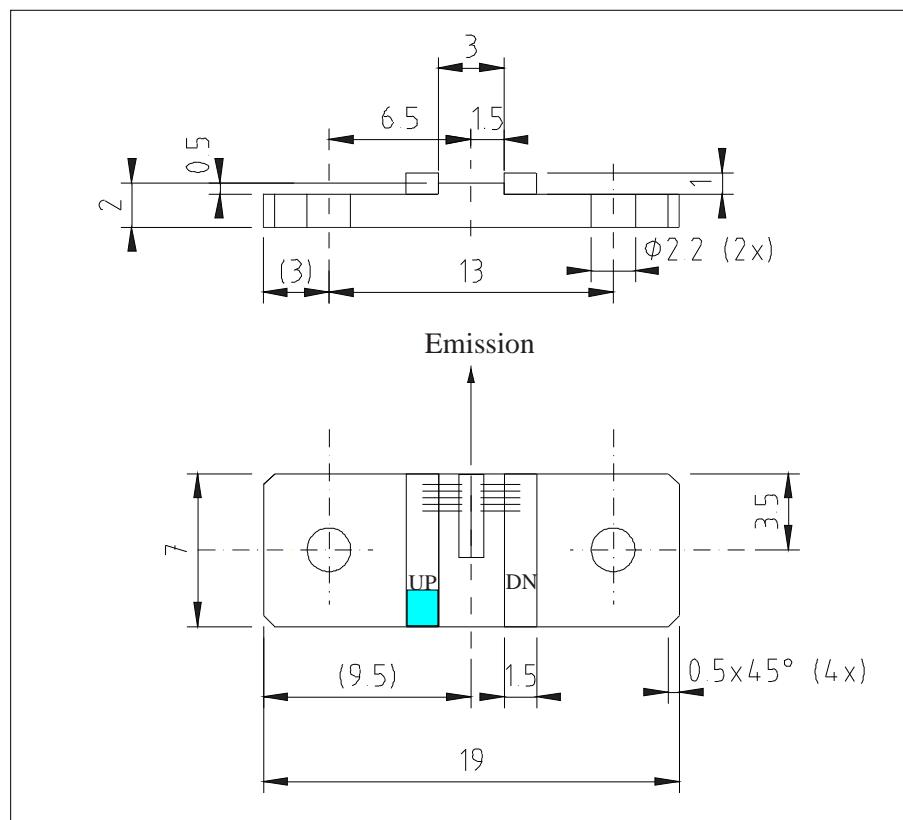


Figure 1: Support mounting for #sbcw1659 UP (please note that the laser is connected to the UP pad drawn in blue)

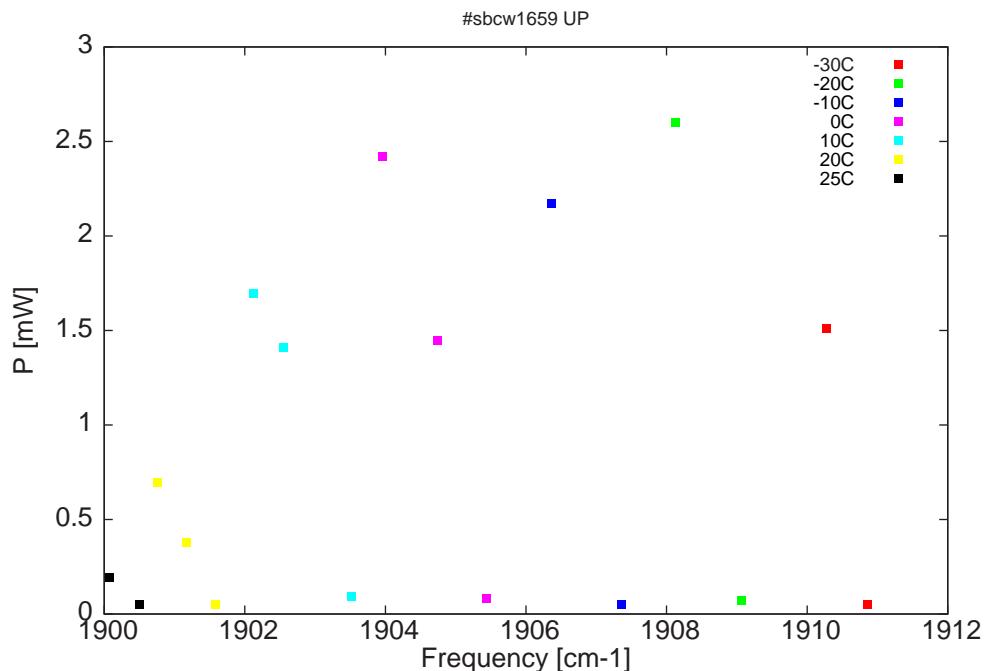


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

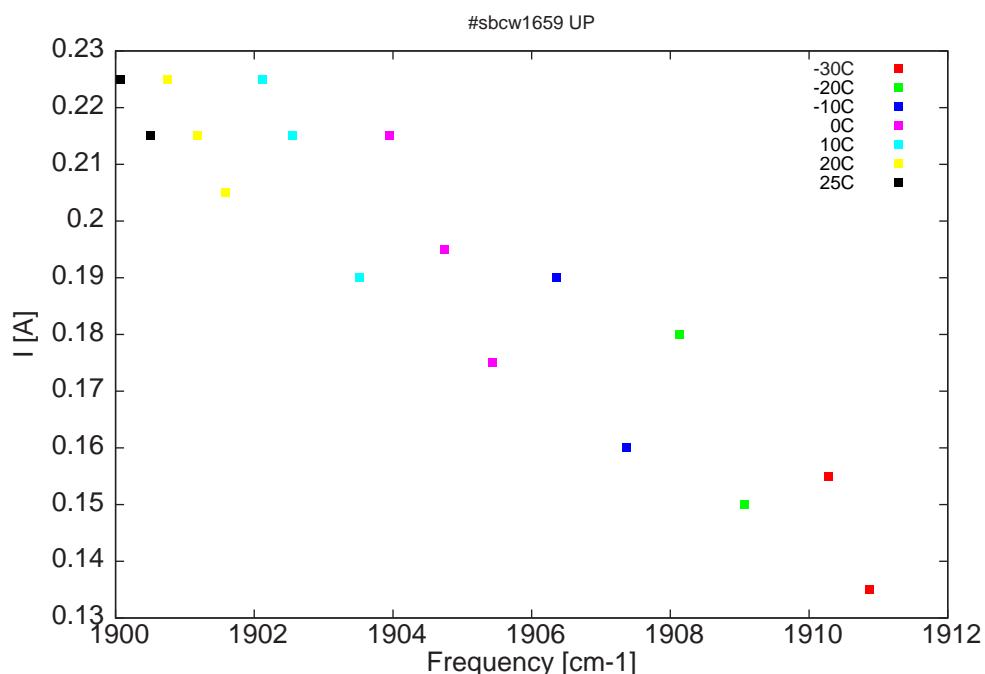


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm $^{-1}$]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
5233.2	1910.9	0.1	-30	9.3	0.14
5234.8	1910.3	1.5	-30	9.7	0.16
5238.1	1909.1	0.1	-20	9.4	0.15
5240.7	1908.1	2.6	-20	9.9	0.18
5242.8	1907.4	0.1	-10	9.3	0.16
5245.6	1906.4	2.2	-10	9.8	0.19
5248.1	1905.4	0.1	0	9.4	0.18
5250.1	1904.7	1.4	0	9.8	0.2
5252.2	1904	2.4	0	10.1	0.22
5253.4	1903.5	0.1	10	9.5	0.19
5256.1	1902.5	1.4	10	10	0.22
5257.3	1902.1	1.7	10	10.2	0.23
5258.8	1901.6	0.1	20	9.6	0.21
5259.9	1901.2	0.4	20	9.8	0.22
5261.1	1900.8	0.7	20	10	0.23
5261.8	1900.5	0.1	25	9.8	0.22
5262.9	1900.1	0.2	25	10	0.23

Table 1 : singlemode optical output power as function of operating parameters

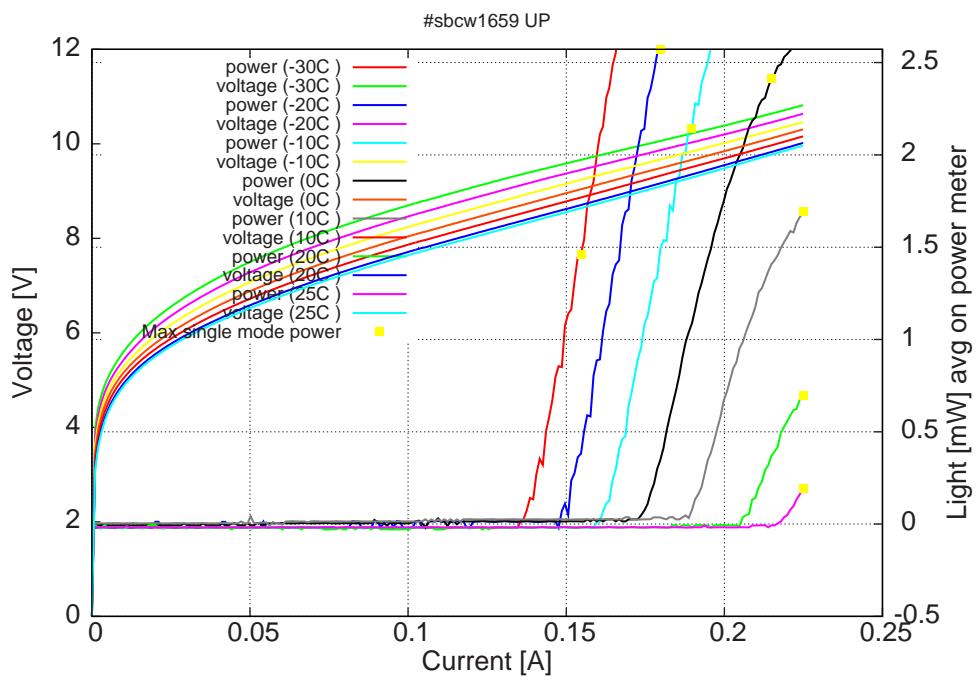


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

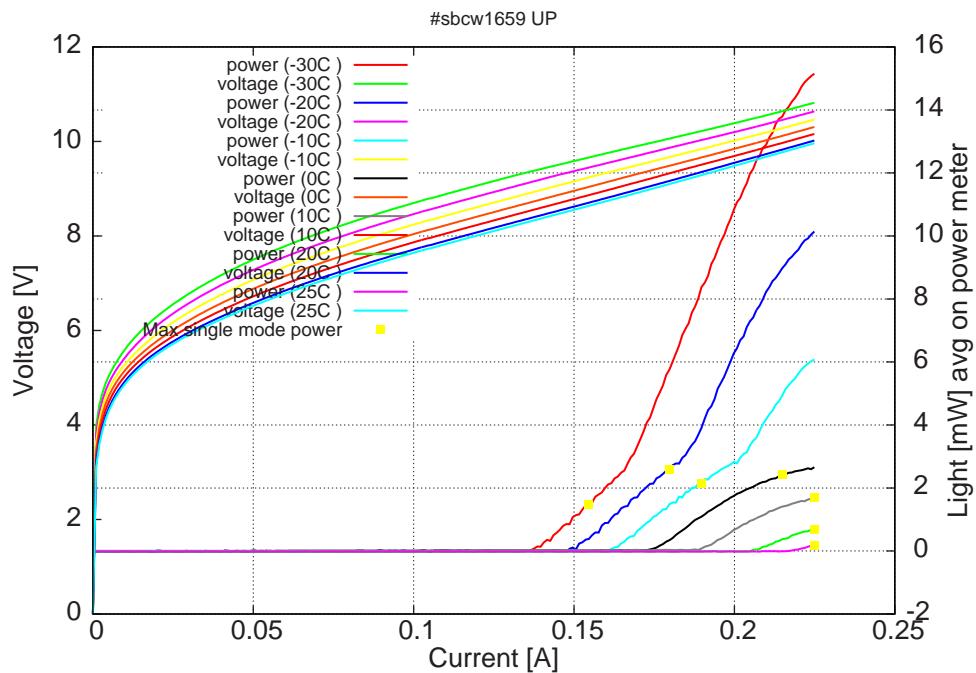
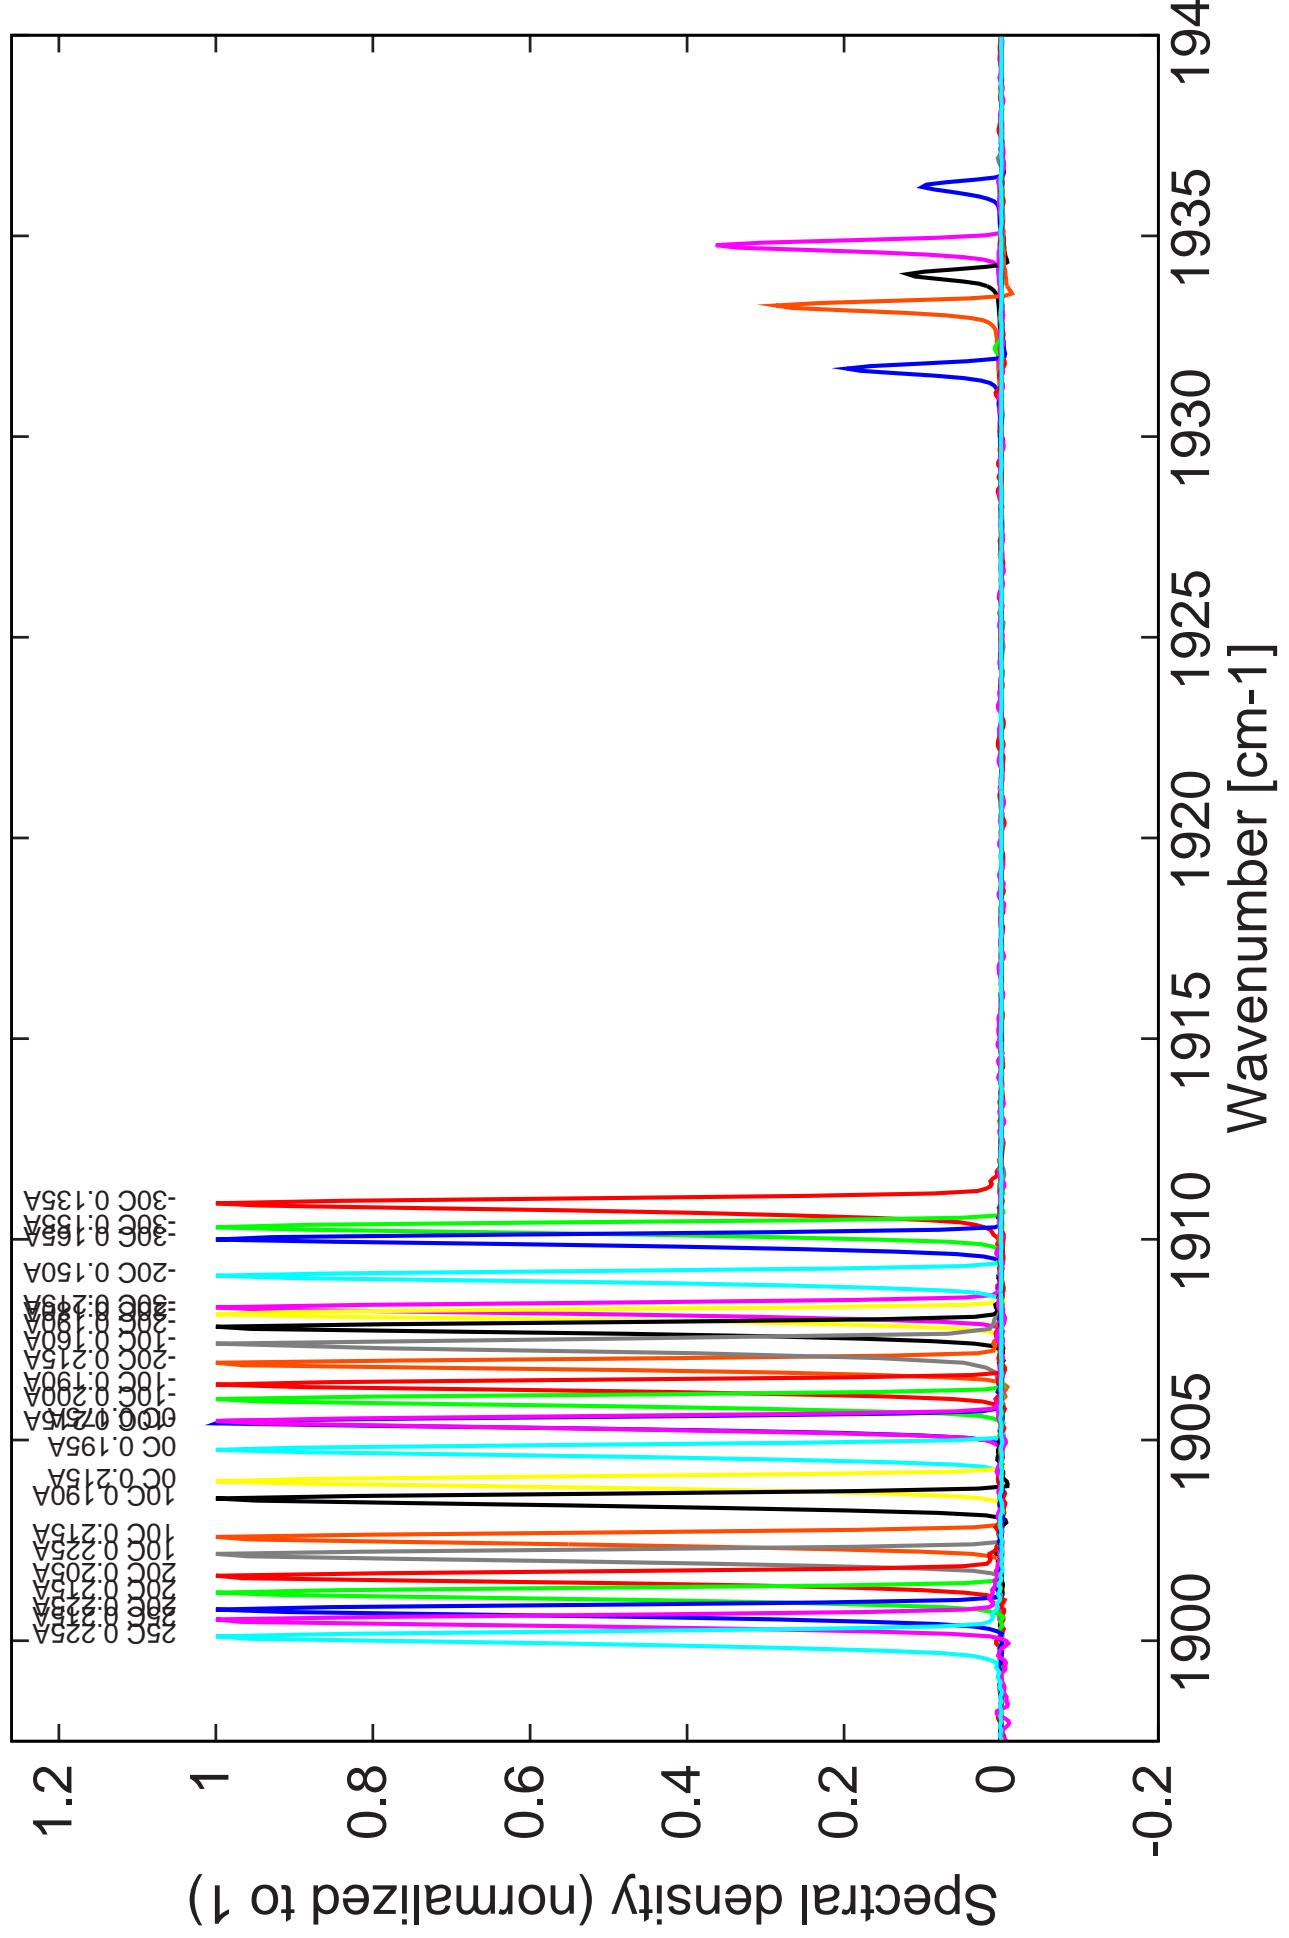


Figure 5: voltage and avg power vs current in continuous-wave operation (including the multimode region)

Note: at -30C: $I_{th}=135\text{mA}$ / $V_{th}= 9.3\text{V}$ (2-wires measurements). Maximum operation current: 0.225A for all temperatures.

Figure 4: spectra at different temperatures for various DC currents



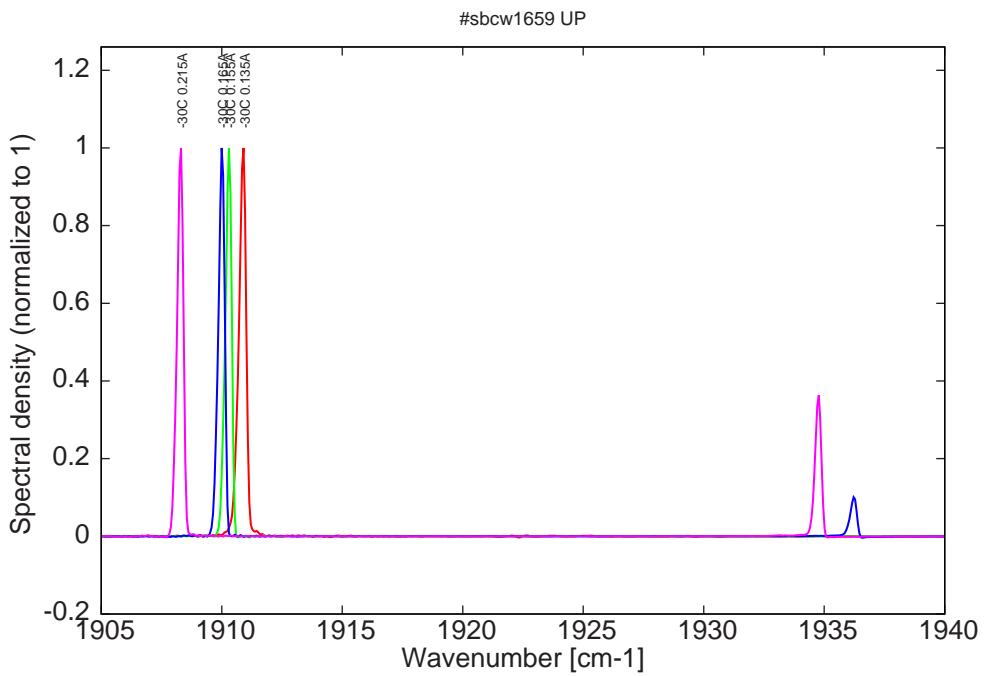


Figure 6: spectra at -30C for various DC currents (monomode up to 0.155A)

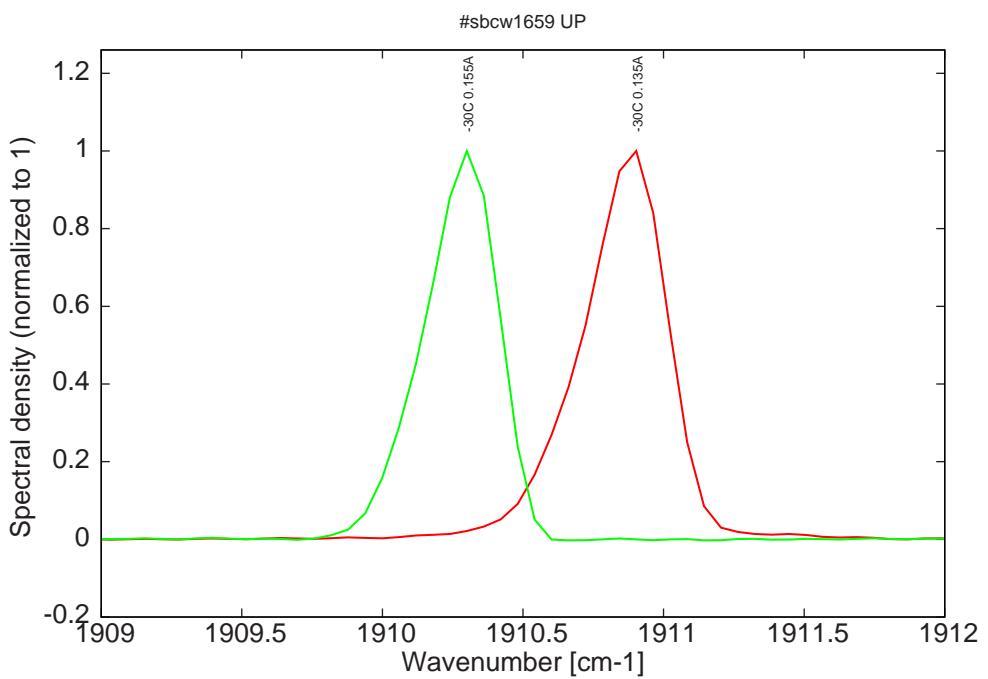


Figure 7: monomode spectra at -30C for various DC currents

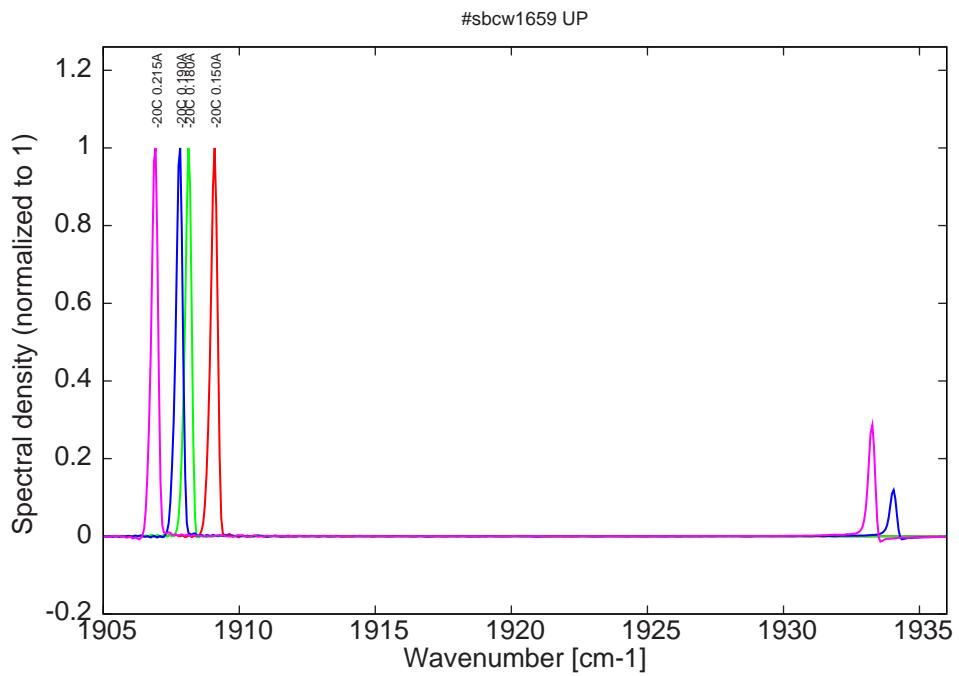


Figure 8: spectra at -20C for various DC currents (monomode up to 0.18A)

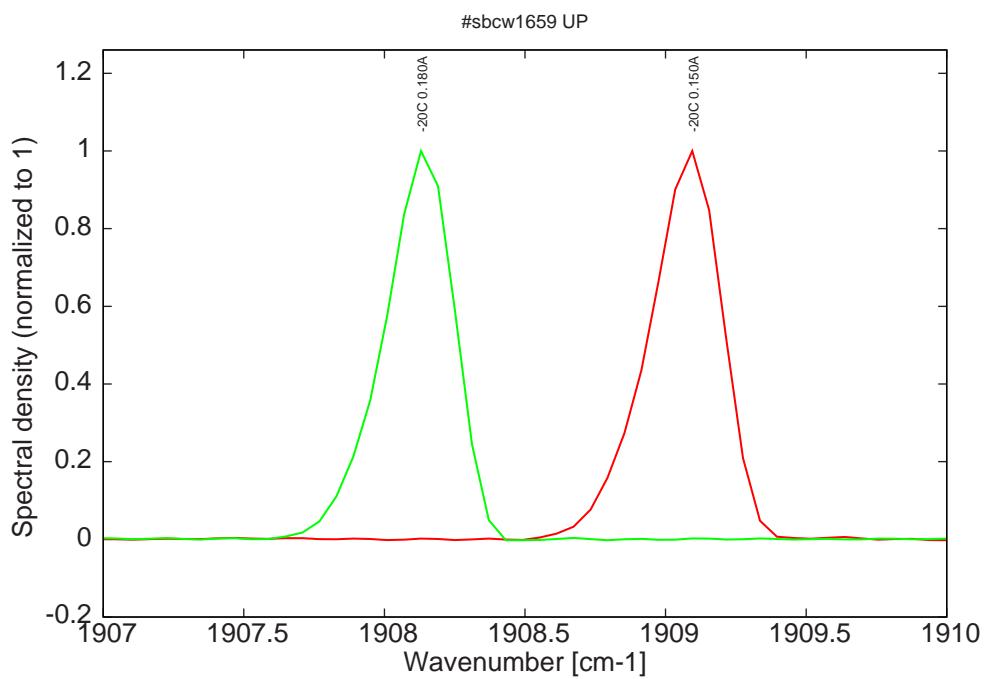


Figure 9: monomode spectra at -20C for various DC currents

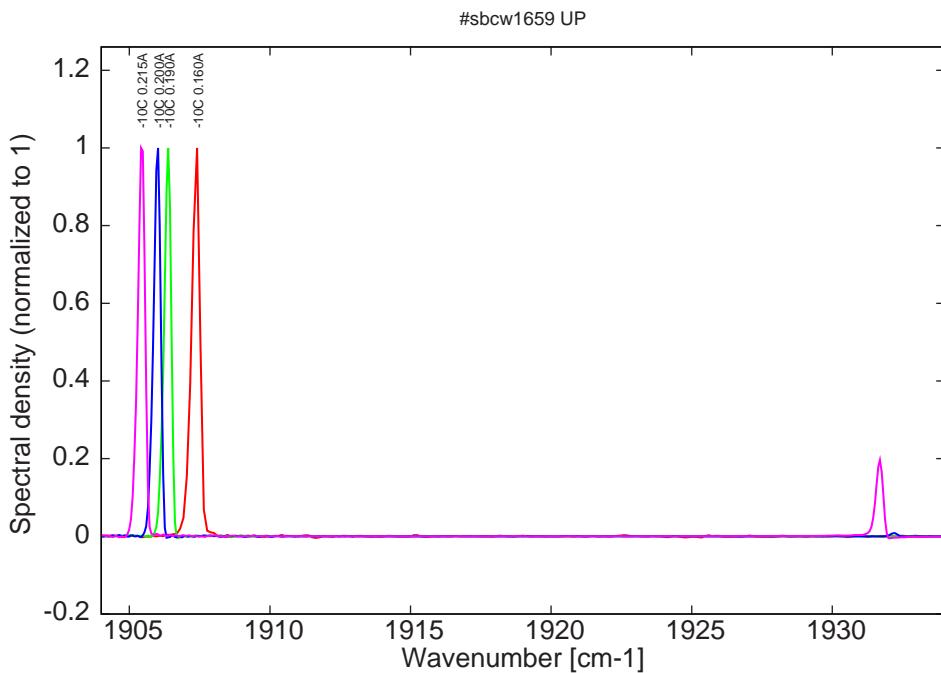


Figure 10: spectra at -10C for various DC currents (monomode up to 0.19A)

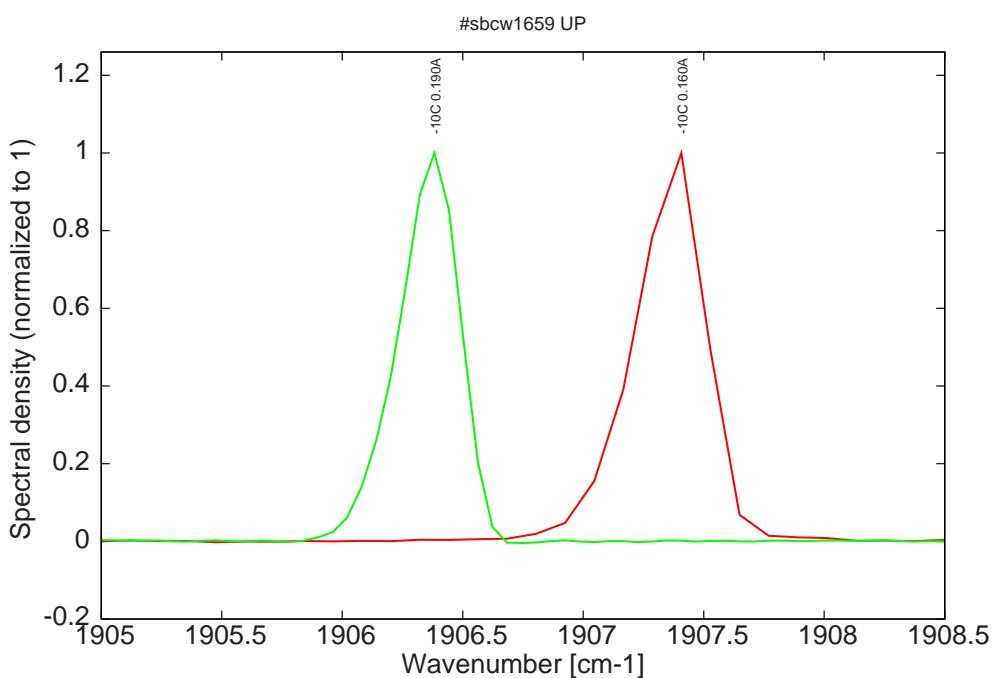


Figure 11: monomode spectra at -10C for various DC currents

Figure 11: spectra between 0C and 25C for various DC currents (all monomode)

