

Datasheet for #sbcw17019 DN
Recommendations:

Please read the User Manual and have a look at the FAQ at
<http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw17019 DN

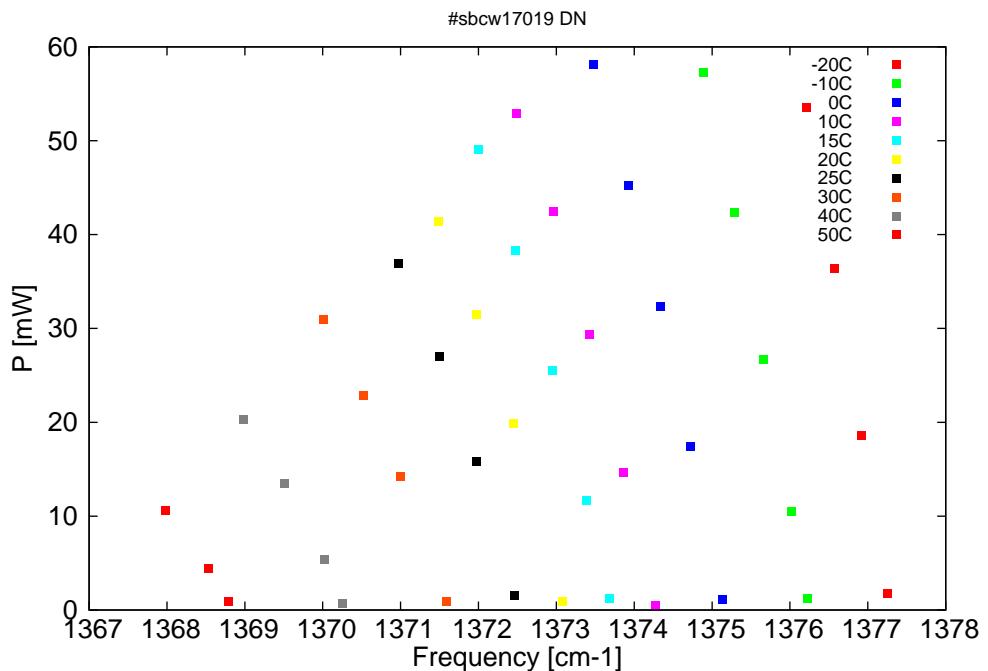


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

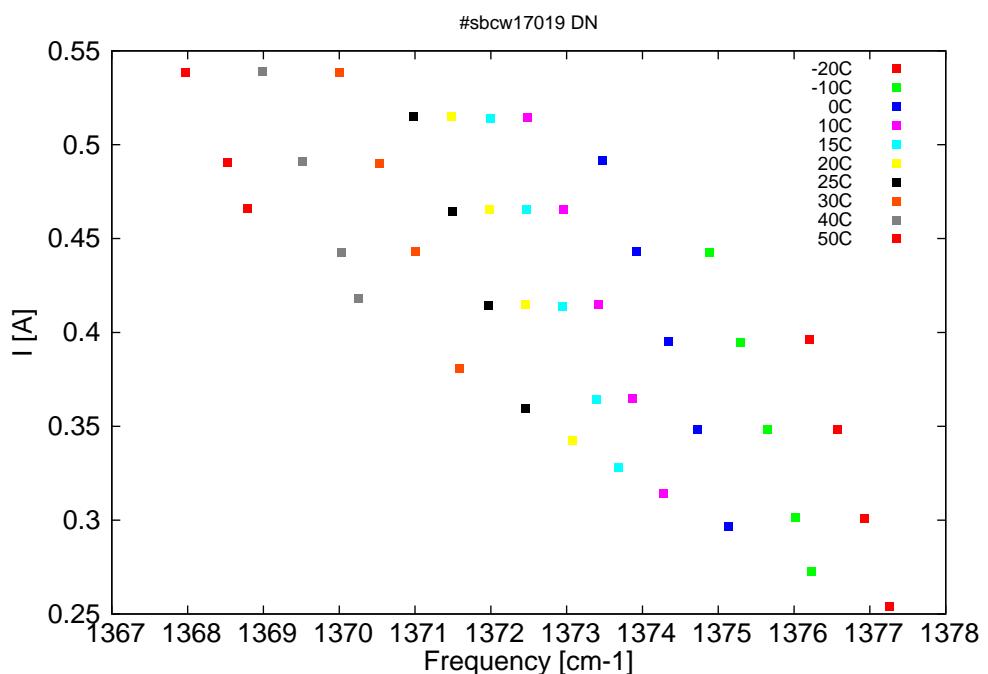


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm $^{-1}$]	P[mW]	Temp[°C]	U $_{LASER}$ [V]	I[A]
7260.8	1377.3	1.7	-20	8.4	0.25
7262.6	1376.9	18.5	-20	8.6	0.3
7264.4	1376.6	36.4	-20	8.8	0.35
7266.3	1376.2	53.5	-20	9	0.4
7266.2	1376.2	1.2	-10	8.4	0.27
7267.4	1376	10.5	-10	8.5	0.3
7269.3	1375.7	26.7	-10	8.7	0.35
7271.2	1375.3	42.3	-10	8.9	0.39
7273.3	1374.9	57.2	-10	9.1	0.44
7272	1375.1	1.1	0	8.4	0.3
7274.2	1374.7	17.4	0	8.7	0.35
7276.2	1374.3	32.3	0	8.9	0.4
7278.4	1373.9	45.2	0	9.1	0.44
7280.8	1373.5	58.1	0	9.3	0.49
7276.6	1374.3	0.5	10	8.4	0.31
7278.7	1373.9	14.7	10	8.7	0.36
7281.1	1373.4	29.3	10	8.9	0.41
7283.5	1373	42.5	10	9.2	0.47
7286	1372.5	52.9	10	9.4	0.51
7279.7	1373.7	1.3	15	8.5	0.33
7281.3	1373.4	11.7	15	8.7	0.36
7283.6	1372.9	25.6	15	8.9	0.41
7286.1	1372.5	38.3	15	9.1	0.47
7288.7	1372	49.1	15	9.4	0.51
7282.9	1373.1	0.9	20	8.5	0.34
7286.2	1372.5	19.9	20	8.9	0.41
7288.8	1372	31.5	20	9.1	0.47
7291.4	1371.5	41.4	20	9.3	0.52
7286.2	1372.5	1.5	25	8.6	0.36
7288.8	1372	15.8	25	8.8	0.41
7291.3	1371.5	27.1	25	9.1	0.46
7294.1	1371	36.9	25	9.3	0.52
7290.8	1371.6	0.9	30	8.6	0.38
7293.9	1371	14.3	30	8.9	0.44
7296.5	1370.5	22.9	30	9.1	0.49
7299.2	1370	30.9	30	9.4	0.54
7297.9	1370.3	0.7	40	8.7	0.42
7299.1	1370	5.4	40	8.8	0.44
7301.9	1369.5	13.5	40	9.1	0.49
7304.7	1369	20.3	40	9.3	0.54
7305.7	1368.8	0.9	50	8.9	0.47
7307.1	1368.5	4.4	50	9	0.49
7310.1	1368	10.6	50	9.2	0.54

Table 1: Singlemode optical output power as function of operating parameters.

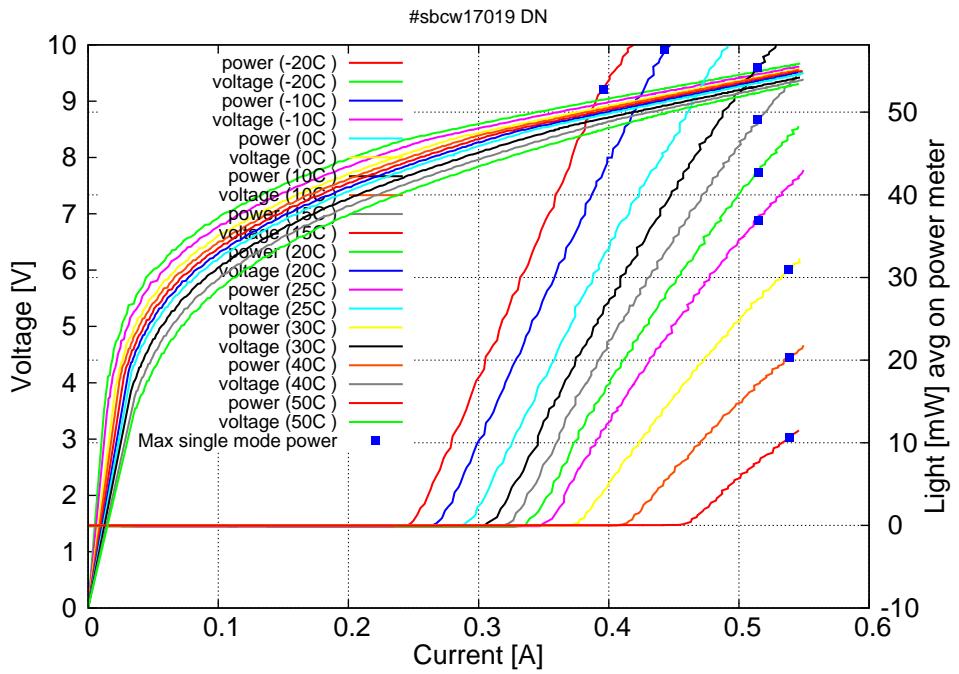


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

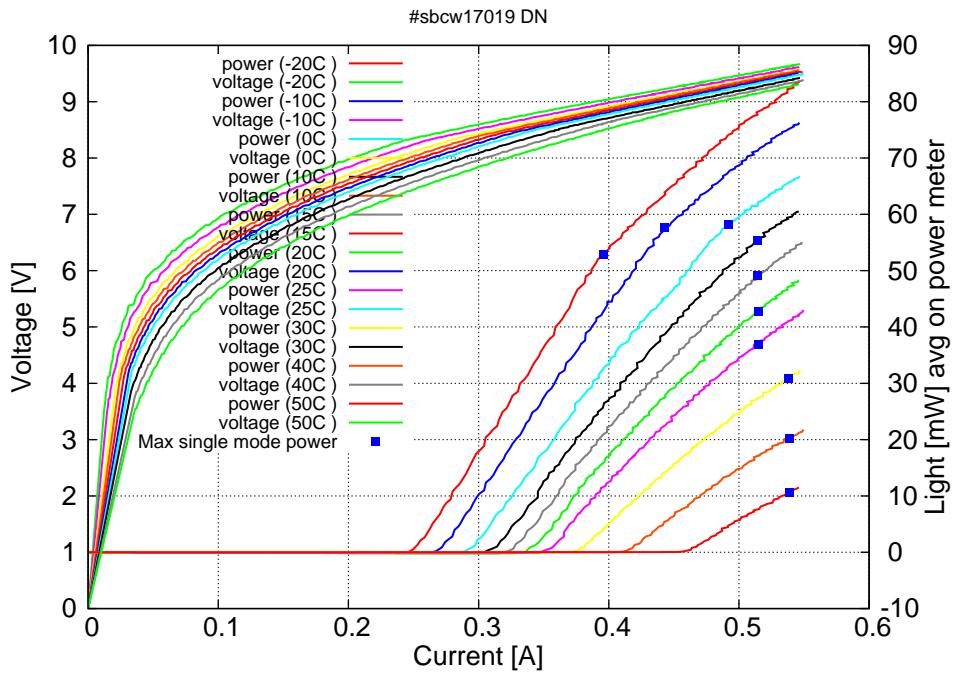
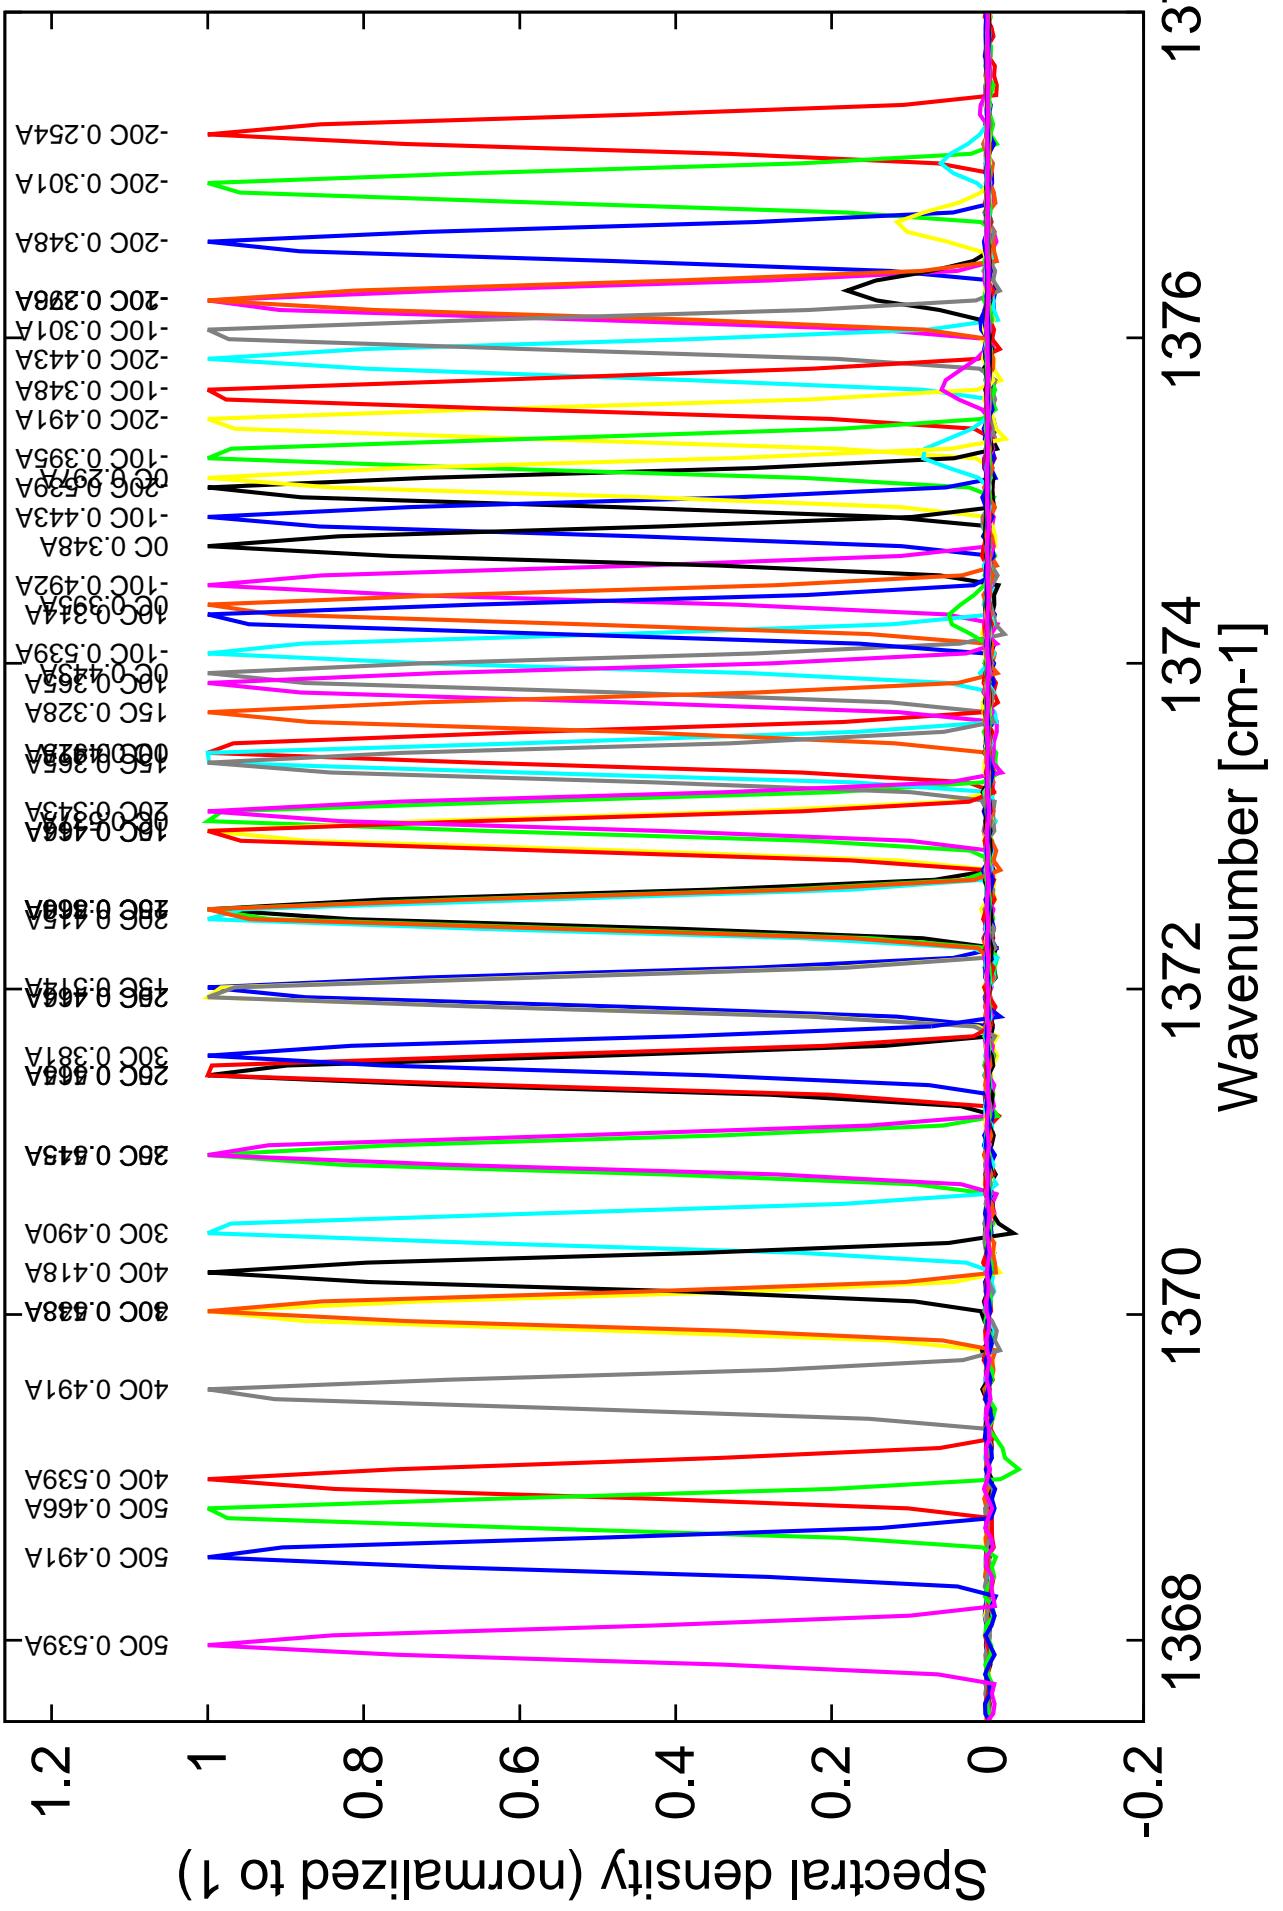


Figure 5: voltage and avg power vs current in continuous-wave operation (including the multimode region)

Note: at 10C: $I_{th}=0.25A$ / $V_{th}=8.4V$ (2-wires measurements). Maximum operation current: 0.550A for all temperatures.

Figure 4: spectra at different temperatures for various DC currents



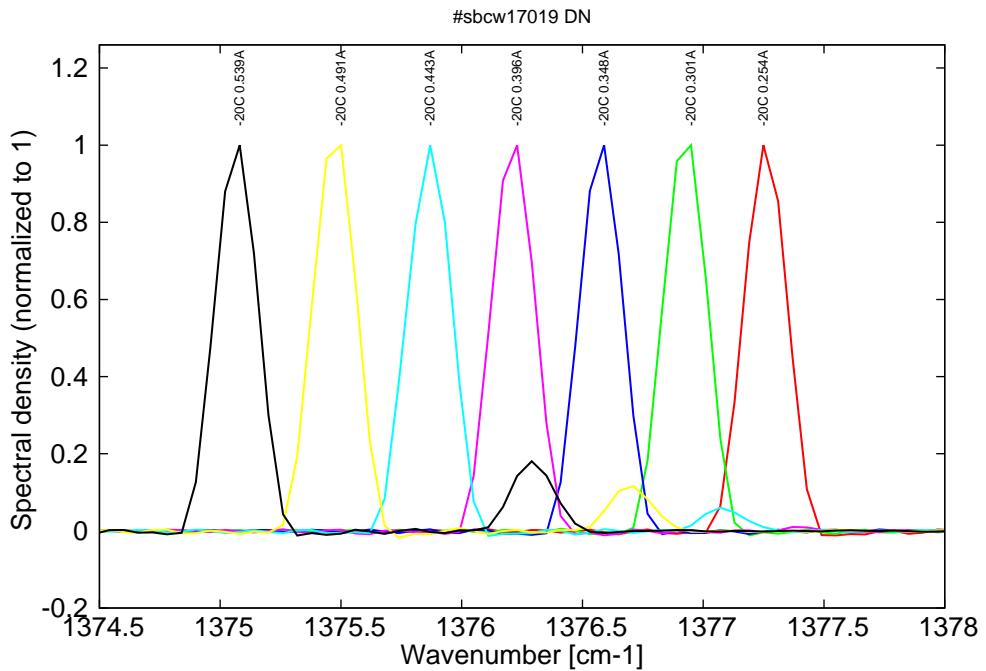


Figure 6: spectra at -20C for various DC currents (monomode up to 0.395A, then becomes bimode)

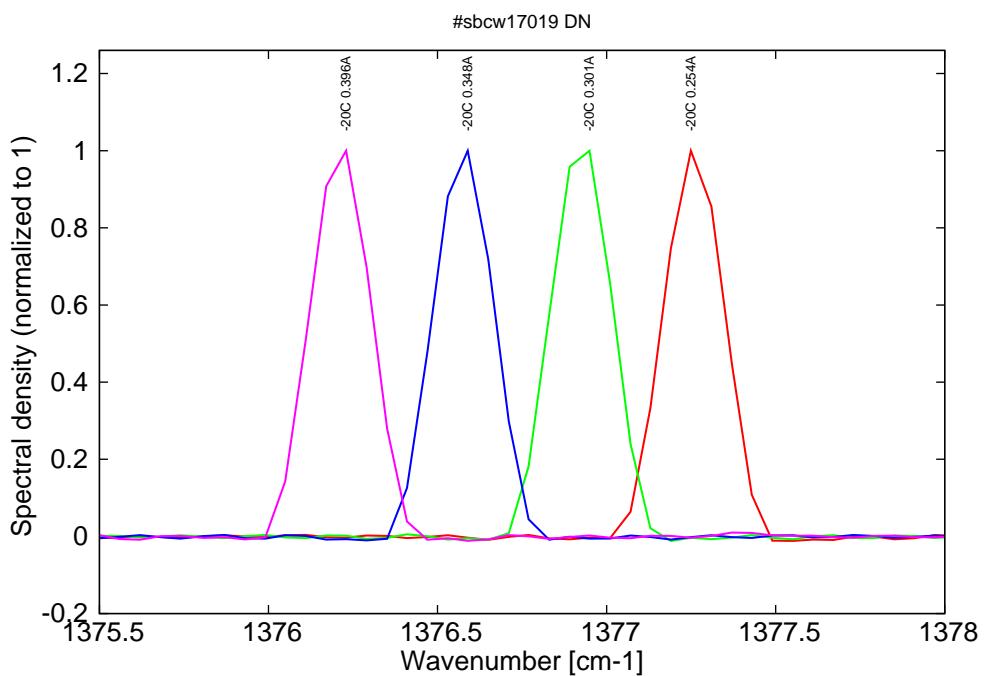


Figure 7: spectra at -20C for various DC currents (monomode range)

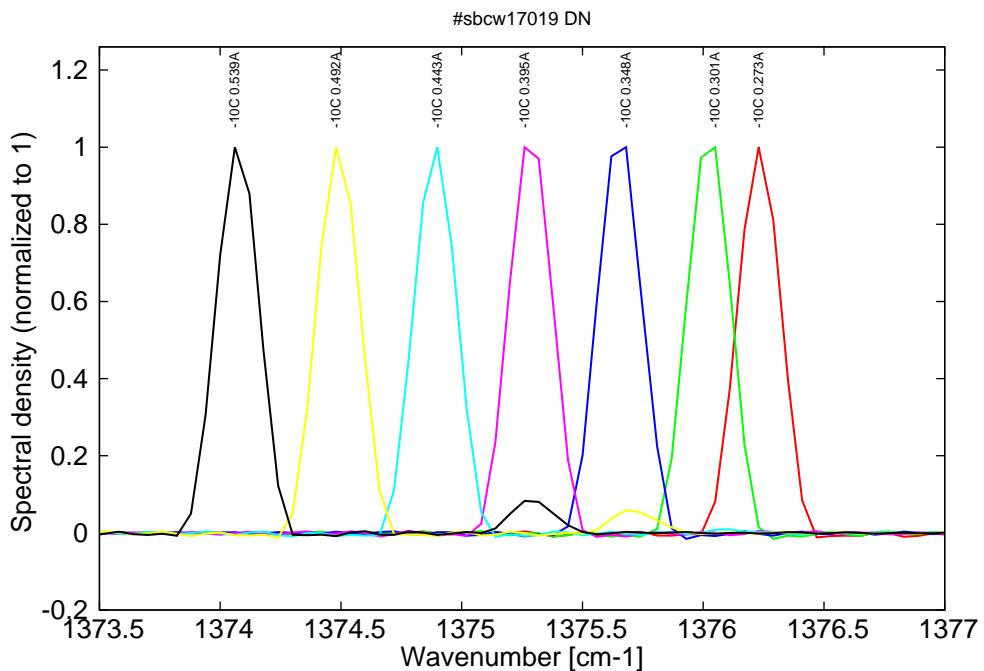


Figure 8: spectra at -10C for various DC currents (monomode up to 0.445A, then becomes bimode)

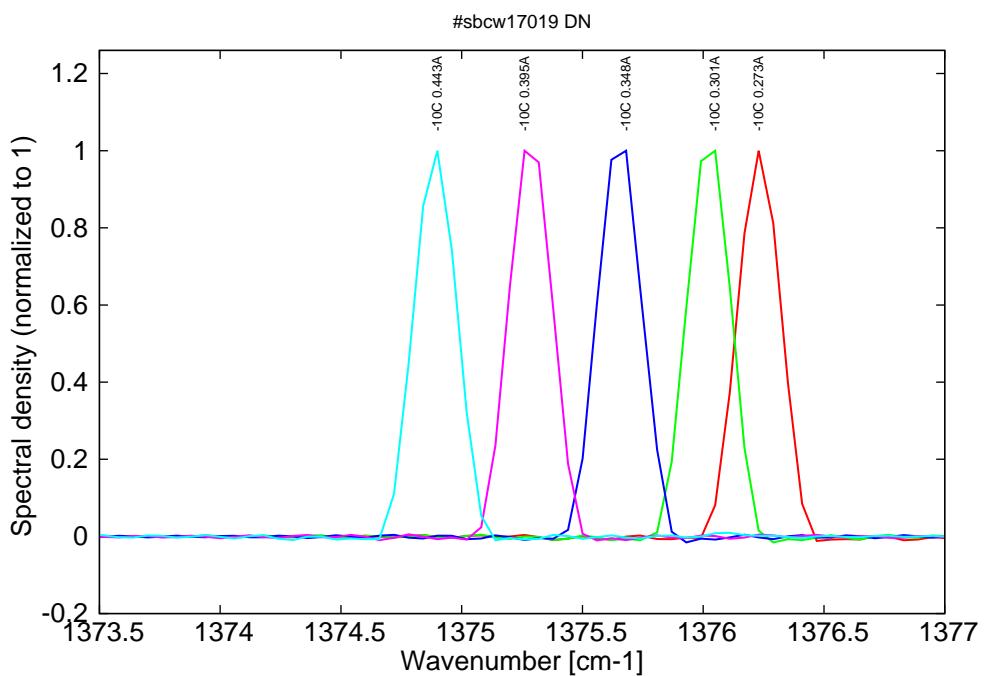


Figure 9: spectra at -10C for various DC currents (monomode range)

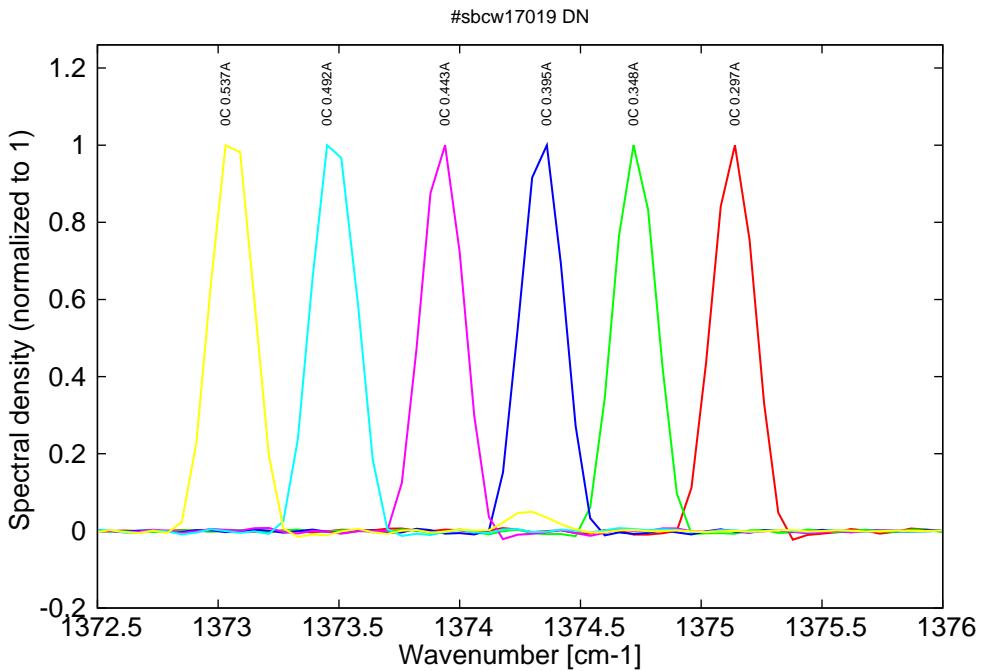


Figure 10: spectra at 0C for various DC currents (monomode up to 0.49A, then becomes bimode)

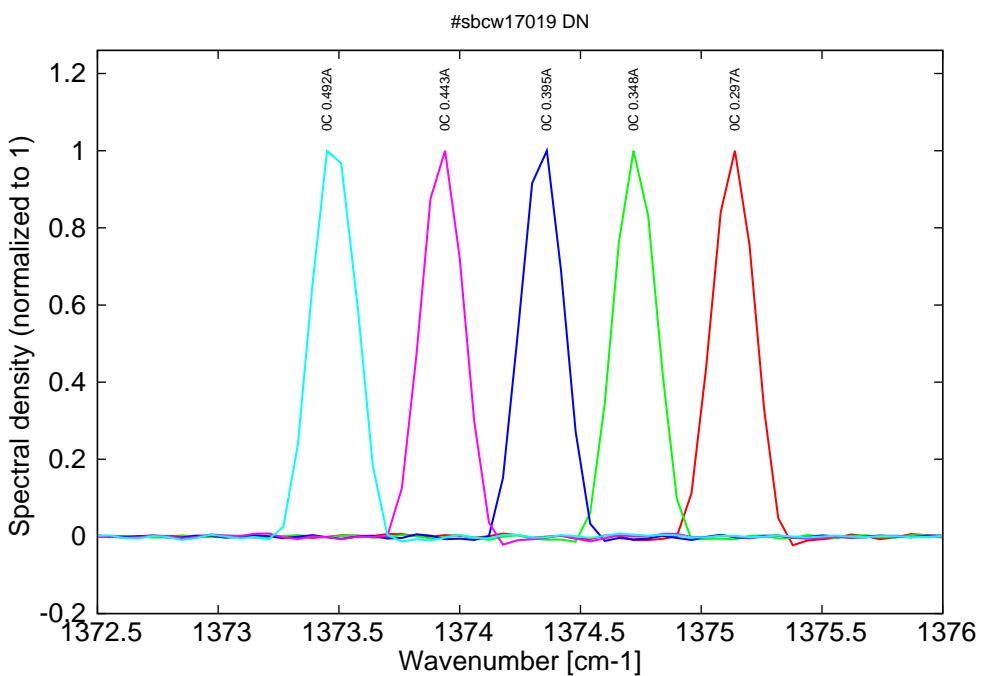


Figure 11: spectra at 0C for various DC currents (monomode range)

Figure 11: spectra between 10C and 50C for various DC currents (all monomode)

