

Datasheet for #sbcw20202 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw20202 DN (please note that AlN submount numbering is A0R7Y)

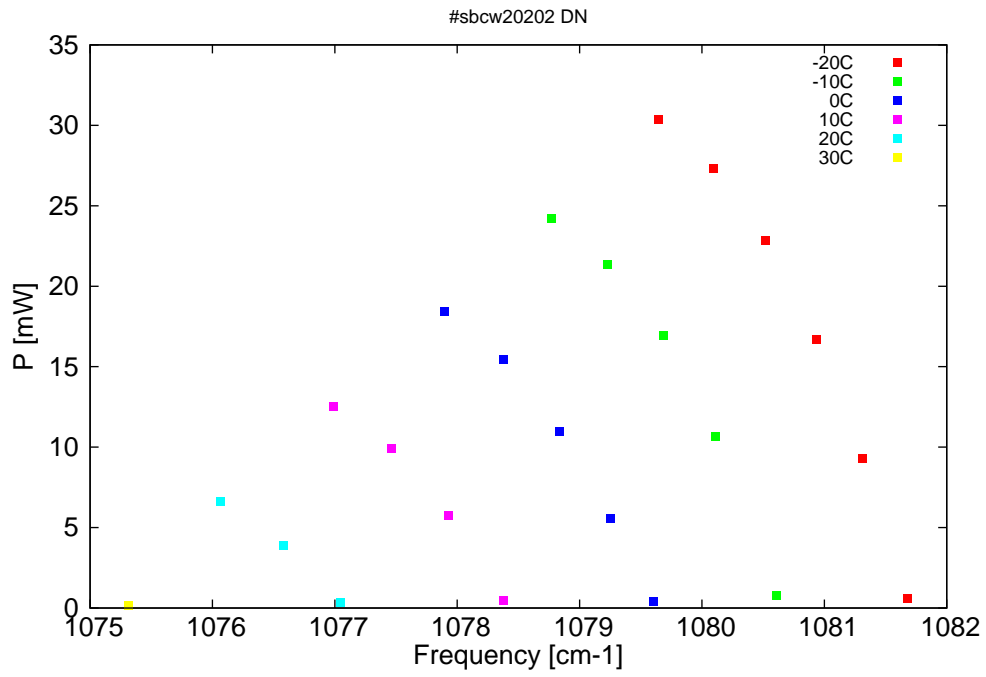


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

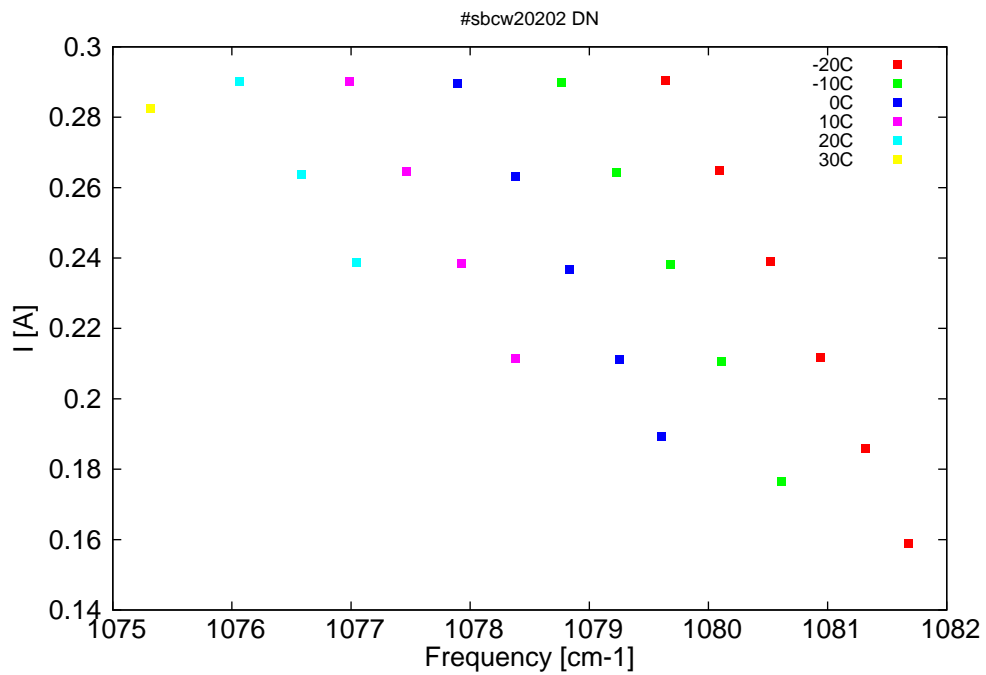


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
9244.9	1081.7	0.6	-20	11.34	0.159
9248	1081.3	9.3	-20	11.82	0.186
9251.2	1080.9	16.7	-20	12.26	0.212
9254.8	1080.5	22.8	-20	12.69	0.239
9258.5	1080.1	27.3	-20	13.1	0.265
9262.3	1079.6	30.4	-20	13.5	0.29
9254	1080.6	0.8	-10	11.52	0.176
9258.3	1080.1	10.7	-10	12.1	0.211
9262	1079.7	16.9	-10	12.54	0.238
9265.9	1079.2	21.3	-10	12.96	0.264
9269.8	1078.8	24.2	-10	13.34	0.29
9262.7	1079.6	0.4	0	11.61	0.189
9265.7	1079.3	5.5	0	11.98	0.211
9269.3	1078.8	11	0	12.39	0.237
9273.2	1078.4	15.5	0	12.8	0.263
9277.3	1077.9	18.5	0	13.19	0.29
9273.2	1078.4	0.4	10	11.84	0.212
9277	1077.9	5.7	10	12.27	0.239
9281	1077.5	9.9	10	12.67	0.265
9285.1	1077	12.6	10	13.05	0.29
9284.6	1077	0.4	20	12.13	0.239
9288.7	1076.6	3.9	20	12.51	0.264
9293.1	1076.1	6.6	20	12.89	0.29
9299.6	1075.3	0.1	30	12.65	0.283

Table 1: Singlemode optical output power as function of operating parameters.

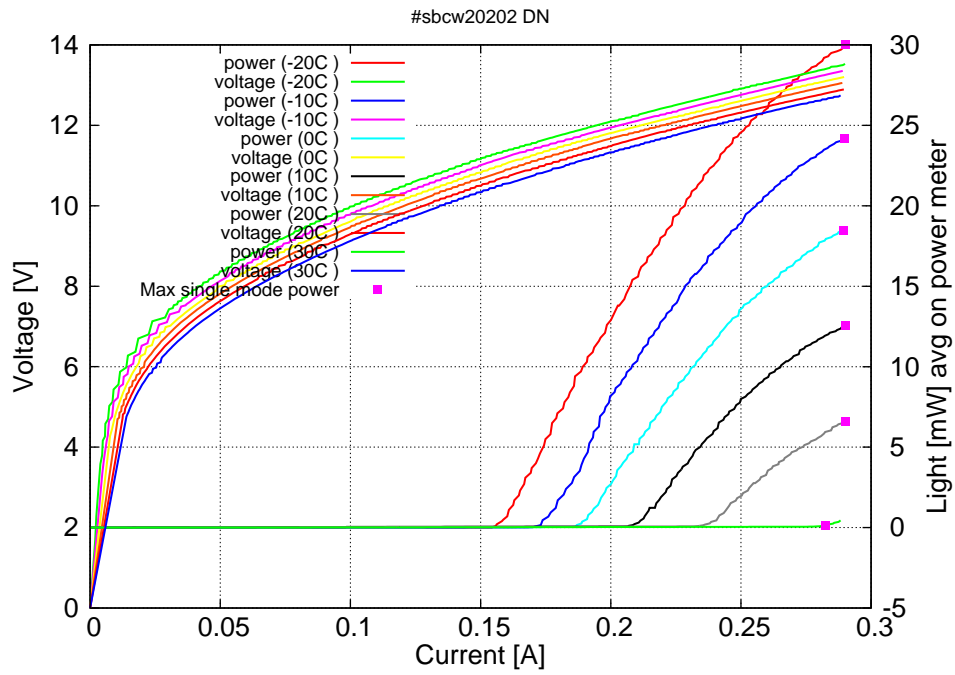


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.16A$ / $V_{th}=11.3V$ (2-wires measurements). Maximum operation current: 0.29A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

