

Datasheet for #sbcw23680 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw23680 DN

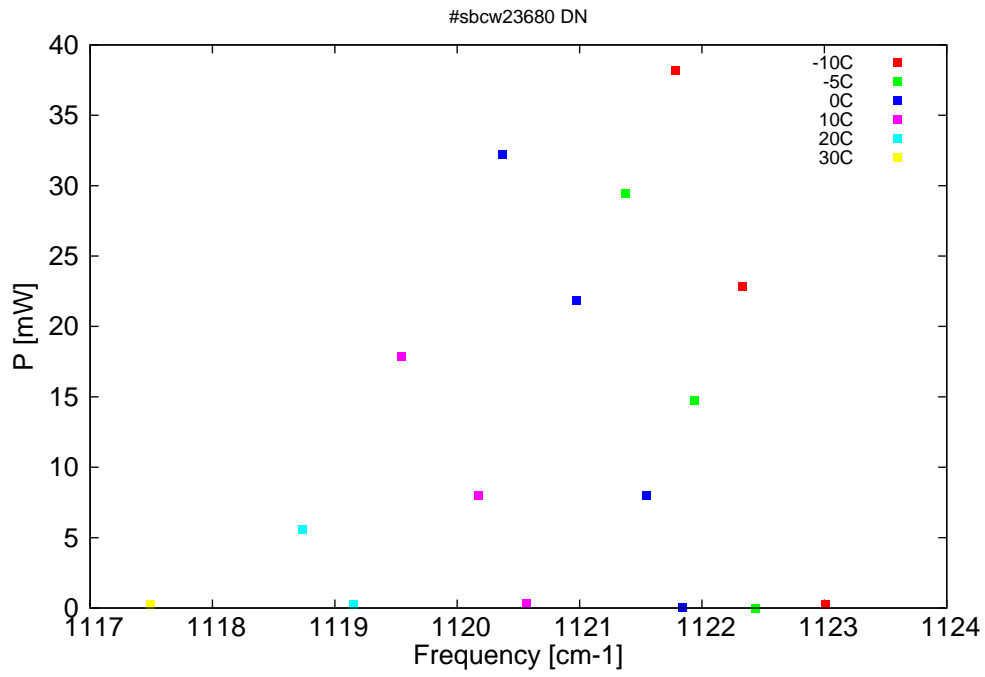


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

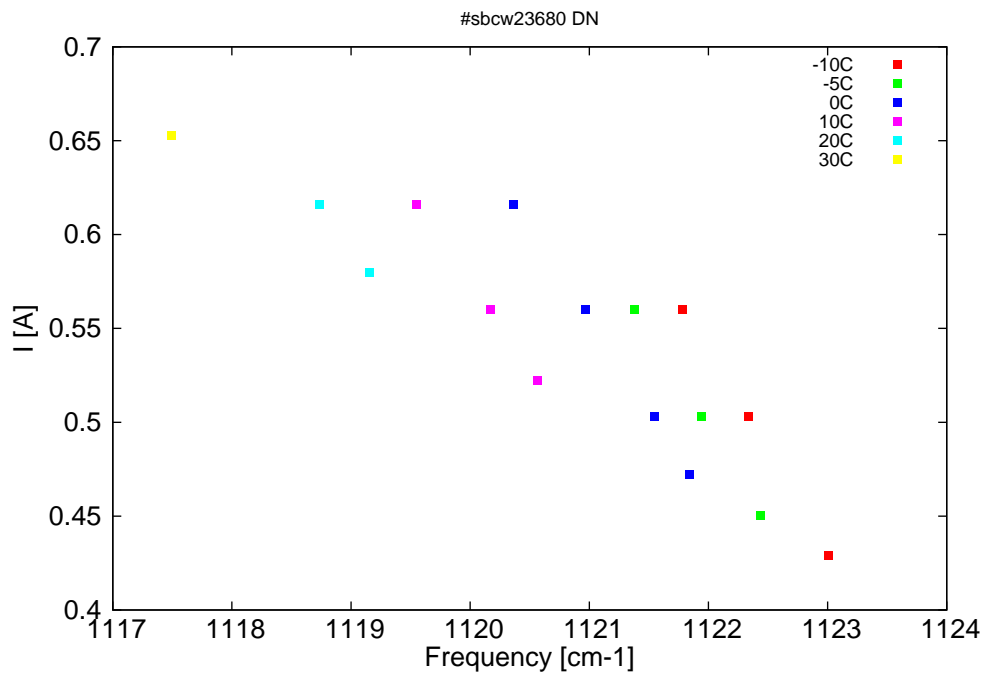


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
8904.6	1123	0.3	-10	10.09	0.429
8910	1122.3	22.9	-10	10.53	0.503
8914.4	1121.8	38.2	-10	10.83	0.56
8909.2	1122.4	0	-5	10.15	0.45
8913.1	1121.9	14.7	-5	10.46	0.503
8917.6	1121.4	29.4	-5	10.77	0.56
8913.9	1121.8	0.1	0	10.21	0.472
8916.3	1121.5	8	0	10.39	0.503
8920.8	1121	21.8	0	10.71	0.56
8925.7	1120.4	32.2	0	11.01	0.616
8924	1120.6	0.3	10	10.37	0.522
8927.2	1120.2	8	10	10.58	0.56
8932.2	1119.5	17.9	10	10.89	0.616
8935.3	1119.2	0.2	20	10.56	0.58
8938.7	1118.7	5.6	20	10.76	0.616
8948.6	1117.5	0.2	30	10.81	0.653

Table 1: Singlemode optical output power as function of operating parameters.

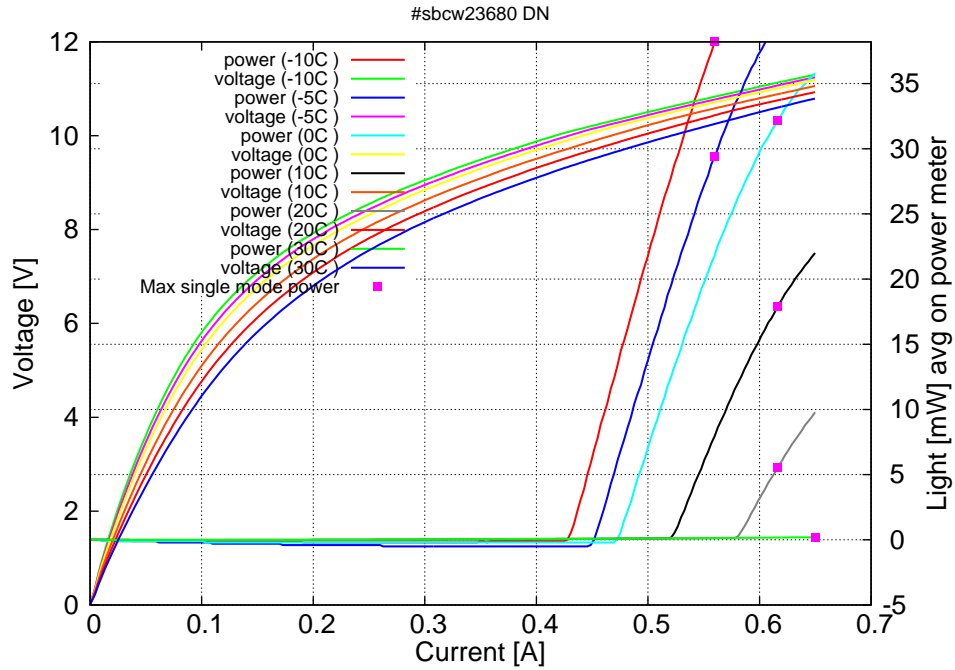


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -10C: $I_{th}=0.42A$ / $V_{th}=10.0V$ (2-wires measurements). Maximum operation current: 0.56A between -10C and -5C, 0.62A between 0C and 10C, 0.65A between 20C and 30C.

Figure 3: spectra at different temperatures for various DC currents

