

Datasheet for #sbcw23734 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw23734 DN (please note that AlN submount numbering is A0Y34)

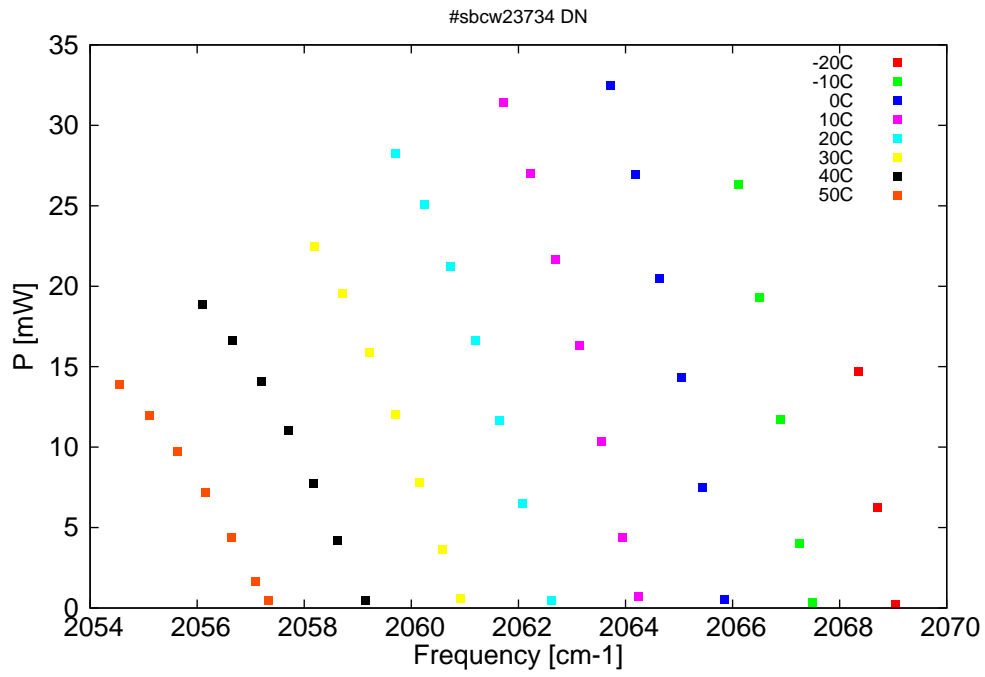


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

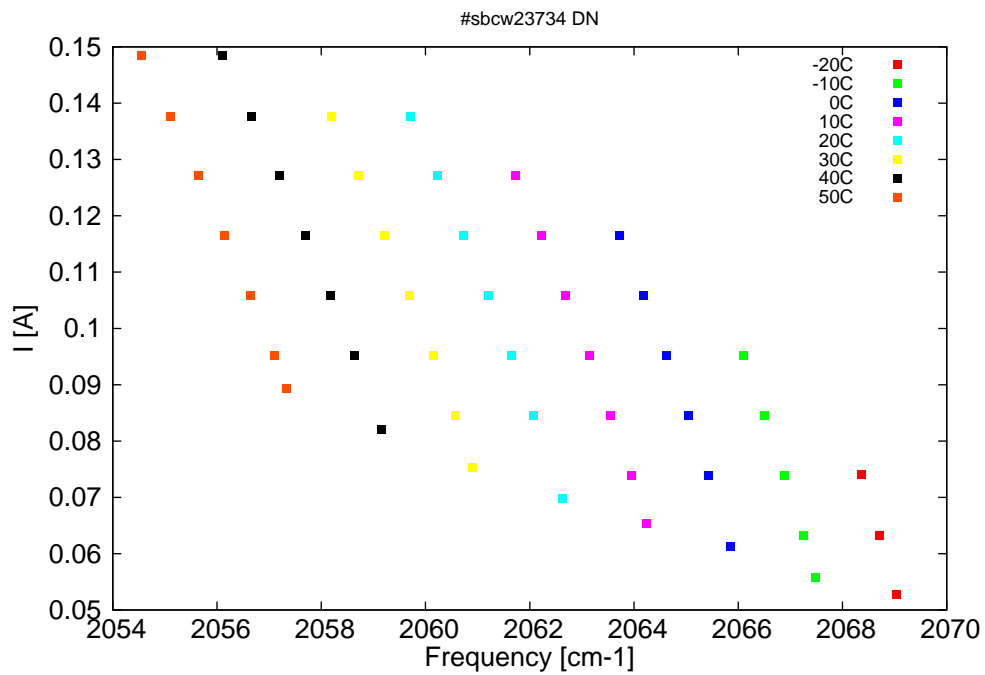


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
4833.2	2069	0.2	-20	12.17	0.053
4833.9	2068.7	6.2	-20	12.55	0.063
4834.7	2068.4	14.7	-20	12.94	0.074
4836.8	2067.5	0.3	-10	12.08	0.056
4837.3	2067.3	4	-10	12.33	0.063
4838.2	2066.9	11.7	-10	12.7	0.074
4839.1	2066.5	19.3	-10	13.07	0.085
4840	2066.1	26.3	-10	13.44	0.095
4840.6	2065.9	0.5	0	12.07	0.061
4841.6	2065.4	7.5	0	12.48	0.074
4842.5	2065	14.3	0	12.83	0.085
4843.5	2064.6	20.5	0	13.18	0.095
4844.5	2064.2	26.9	0	13.53	0.106
4845.6	2063.7	32.5	0	13.91	0.117
4844.4	2064.2	0.7	10	12.04	0.065
4845.1	2064	4.4	10	12.3	0.074
4846	2063.6	10.4	10	12.63	0.085
4847	2063.1	16.3	10	12.97	0.095
4848	2062.7	21.6	10	13.3	0.106
4849.1	2062.2	27	10	13.65	0.117
4850.3	2061.7	31.4	10	14	0.127
4848.2	2062.6	0.5	20	12.03	0.07
4849.5	2062.1	6.5	20	12.45	0.085
4850.5	2061.6	11.7	20	12.77	0.095
4851.5	2061.2	16.6	20	13.08	0.106
4852.6	2060.7	21.3	20	13.41	0.117
4853.8	2060.2	25.1	20	13.74	0.127
4855.1	2059.7	28.3	20	14.08	0.138
4852.2	2060.9	0.6	30	12.05	0.075
4853	2060.6	3.6	30	12.29	0.085
4854	2060.1	7.8	30	12.59	0.095
4855.1	2059.7	12	30	12.89	0.106
4856.2	2059.2	15.9	30	13.2	0.117
4857.4	2058.7	19.5	30	13.5	0.127
4858.6	2058.2	22.5	30	13.82	0.138
4856.4	2059.2	0.5	40	12.1	0.082
4857.6	2058.6	4.2	40	12.43	0.095
4858.7	2058.2	7.7	40	12.71	0.106
4859.8	2057.7	11	40	13	0.117
4861	2057.2	14.1	40	13.29	0.127
4862.3	2056.7	16.6	40	13.59	0.138
4863.6	2056.1	18.8	40	13.89	0.148
4860.7	2057.3	0.5	50	12.16	0.089
4861.2	2057.1	1.6	50	12.3	0.095
4862.3	2056.6	4.4	50	12.57	0.106
4863.5	2056.2	7.2	50	12.83	0.117
4864.7	2055.6	9.7	50	13.11	0.127
4865.9	2055.1	12	50	13.39	0.138
4867.2	2054.6	13.9	50	13.67	0.148

continued on next page

Table 1: Singlemode optical output power as function of operating parameters.

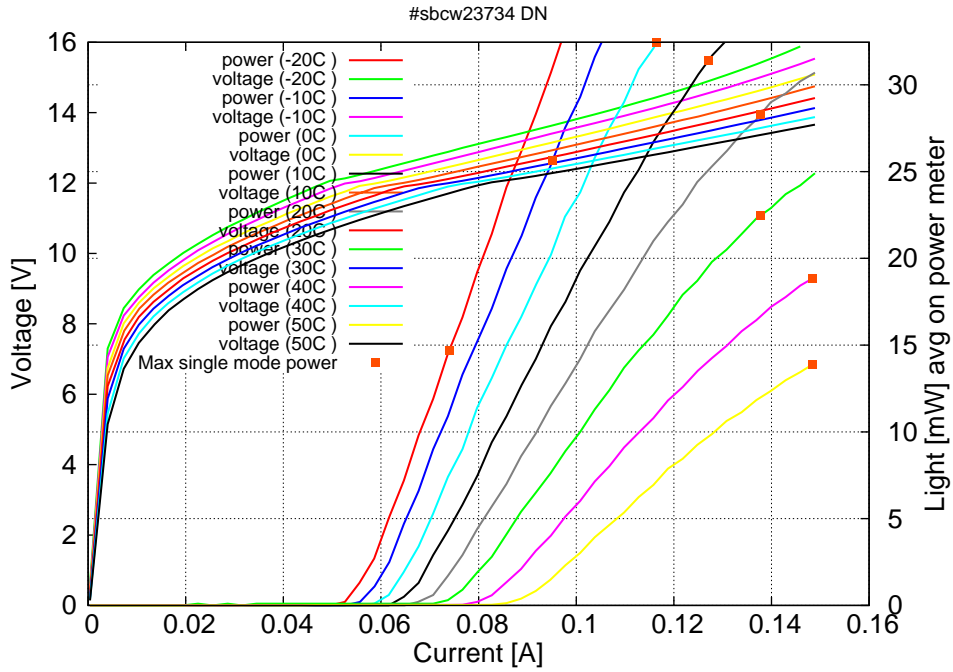


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.05\text{A}$ / $V_{th}=12.1\text{V}$ (2-wires measurements). Maximum operation current: 0.075A at -20C, 0.095 at -10C, 0.12A at 0C, 0.13A at 10C, 0.14A between 20C and 30C, 0.15A between 40C and 50C.

Figure 3: spectra at different temperatures for various DC currents

