

Datasheet for #sbcw24075 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below. To be used with a high compliance CW laser driver capable of reaching the operating current and voltage indicated in this datasheet, or up to 2.5A/20V.



Figure 1: Mechanical and electrical interface for #sbcw24075 DN (please note that AlN submount numbering is A0WW6)

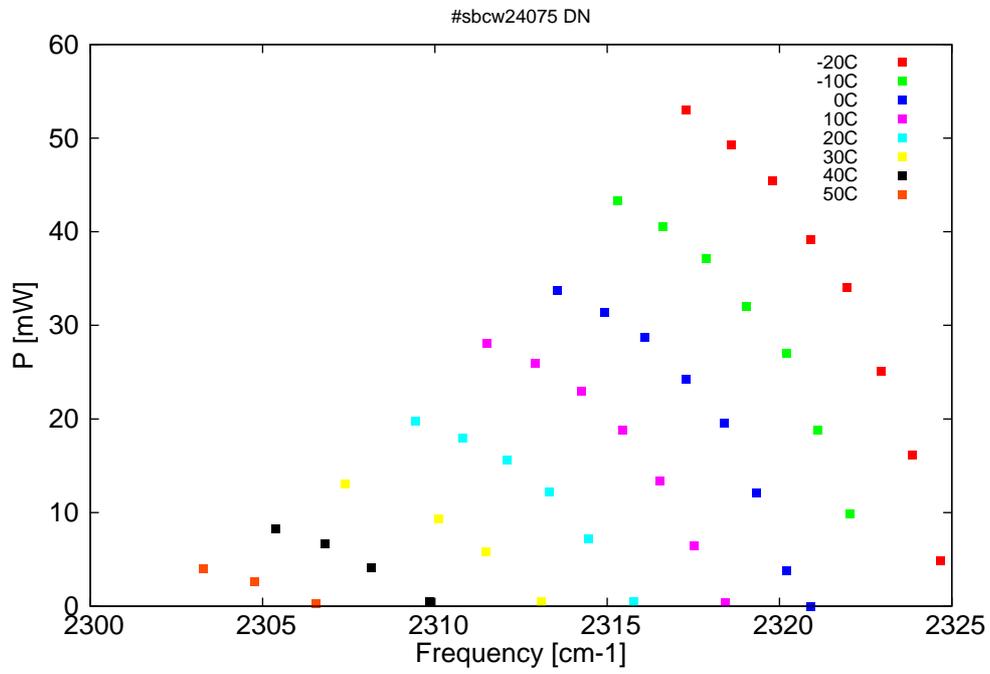


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

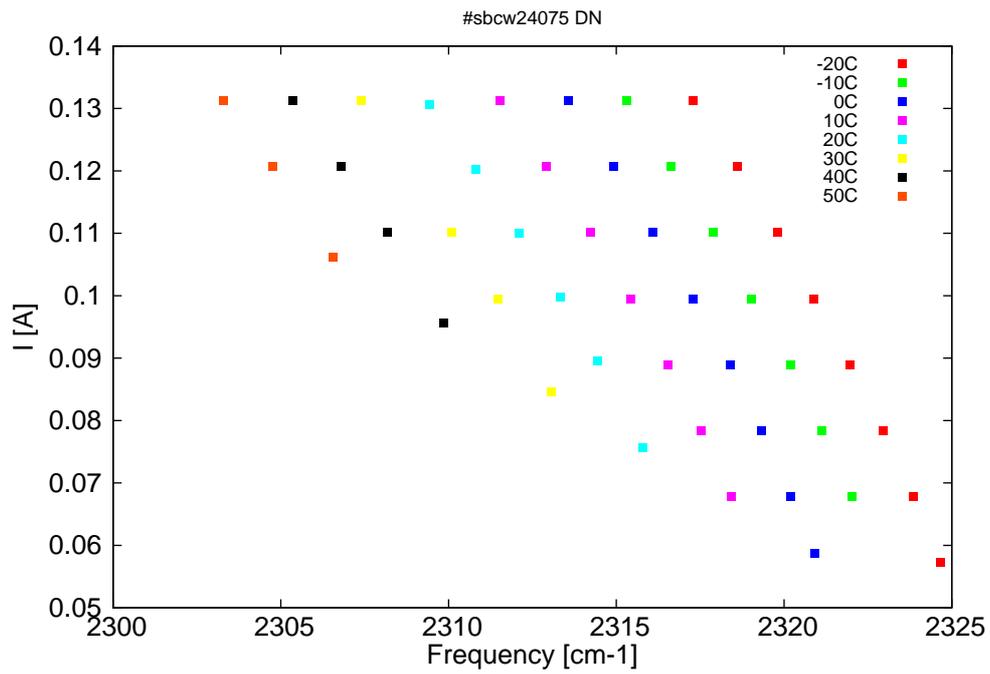


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
4301.7	2324.7	4.9	-20	12.43	0.057
4303.2	2323.8	16.1	-20	12.7	0.068
4304.9	2322.9	25.2	-20	12.98	0.078
4306.7	2322	34.1	-20	13.25	0.089
4308.7	2320.9	39.1	-20	13.52	0.1
4310.7	2319.8	45.5	-20	13.8	0.11
4312.9	2318.6	49.3	-20	14.08	0.121
4315.4	2317.3	53	-20	14.37	0.131
4306.6	2322	9.9	-10	12.6	0.068
4308.3	2321.1	18.8	-10	12.88	0.078
4310	2320.2	27	-10	13.15	0.089
4312.1	2319	32	-10	13.41	0.1
4314.3	2317.9	37.2	-10	13.69	0.11
4316.6	2316.6	40.5	-10	13.98	0.121
4319.1	2315.3	43.4	-10	14.26	0.131
4308.7	2320.9	0	0	12.32	0.059
4310	2320.2	3.8	0	12.51	0.068
4311.6	2319.3	12.1	0	12.78	0.078
4313.3	2318.4	19.6	0	13.05	0.089
4315.4	2317.3	24.2	0	13.33	0.1
4317.6	2316.1	28.7	0	13.59	0.11
4319.8	2314.9	31.3	0	13.87	0.121
4322.3	2313.6	33.7	0	14.16	0.131
4313.3	2318.4	0.3	10	12.45	0.068
4314.9	2317.5	6.5	10	12.71	0.078
4316.8	2316.5	13.4	10	12.96	0.089
4318.8	2315.4	18.8	10	13.22	0.1
4321.1	2314.2	23	10	13.49	0.11
4323.6	2312.9	25.9	10	13.77	0.121
4326.2	2311.5	28.1	10	14.05	0.131
4318.2	2315.8	0.4	20	12.59	0.076
4320.7	2314.4	7.2	20	12.92	0.09
4322.8	2313.3	12.2	20	13.17	0.1
4325.1	2312.1	15.7	20	13.43	0.11
4327.5	2310.8	18	20	13.7	0.12
4330.1	2309.4	19.7	20	13.96	0.131
4323.3	2313.1	0.5	30	12.71	0.085
4326.3	2311.5	5.8	30	13.07	0.1
4328.8	2310.1	9.3	30	13.32	0.11
4333.9	2307.4	13.1	30	13.83	0.131
4329.3	2309.8	0.4	40	12.93	0.096
4332.4	2308.2	4.1	40	13.25	0.11
4335	2306.8	6.7	40	13.5	0.121
4337.7	2305.4	8.2	40	13.76	0.131
4335.5	2306.5	0.2	50	13.15	0.106
4338.9	2304.8	2.6	50	13.46	0.121
4341.6	2303.3	4	50	13.71	0.131

continued on next page

$\lambda[\text{nm}]$ $\nu[\text{cm}^{-1}]$ $P[\text{mW}]$ $\text{Temp}[\text{°C}]$ $U_{LASER}[\text{V}]$ $I[\text{A}]$
 Table 1: Singlemode optical output power as function of operating parameters.

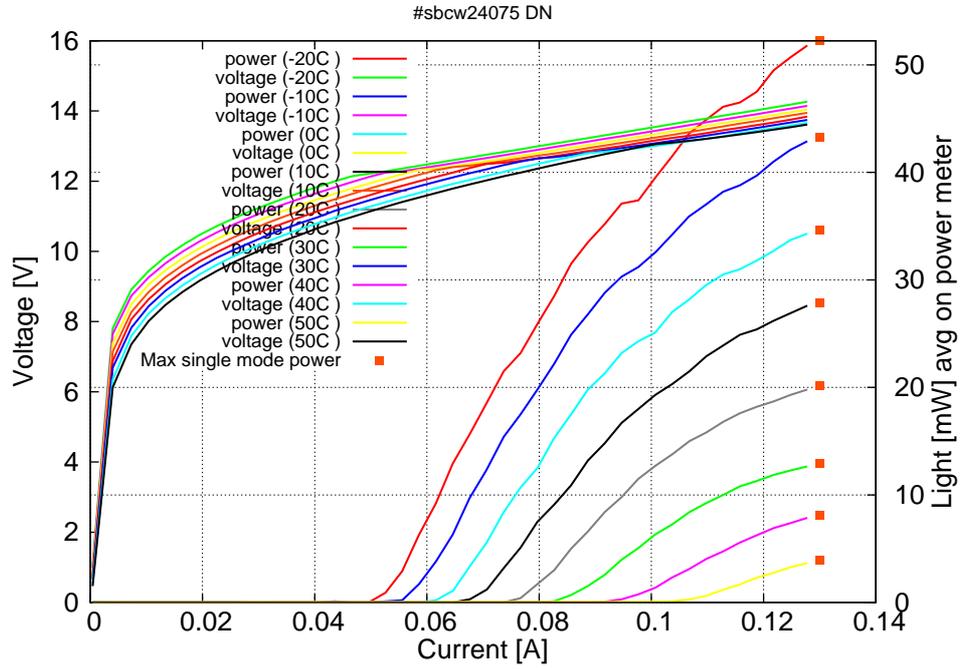


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.05\text{A}$ / $V_{th}=12.3\text{V}$ (2-wires measurements). Maximum operation current: 0.13A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

